


10-15 Pin

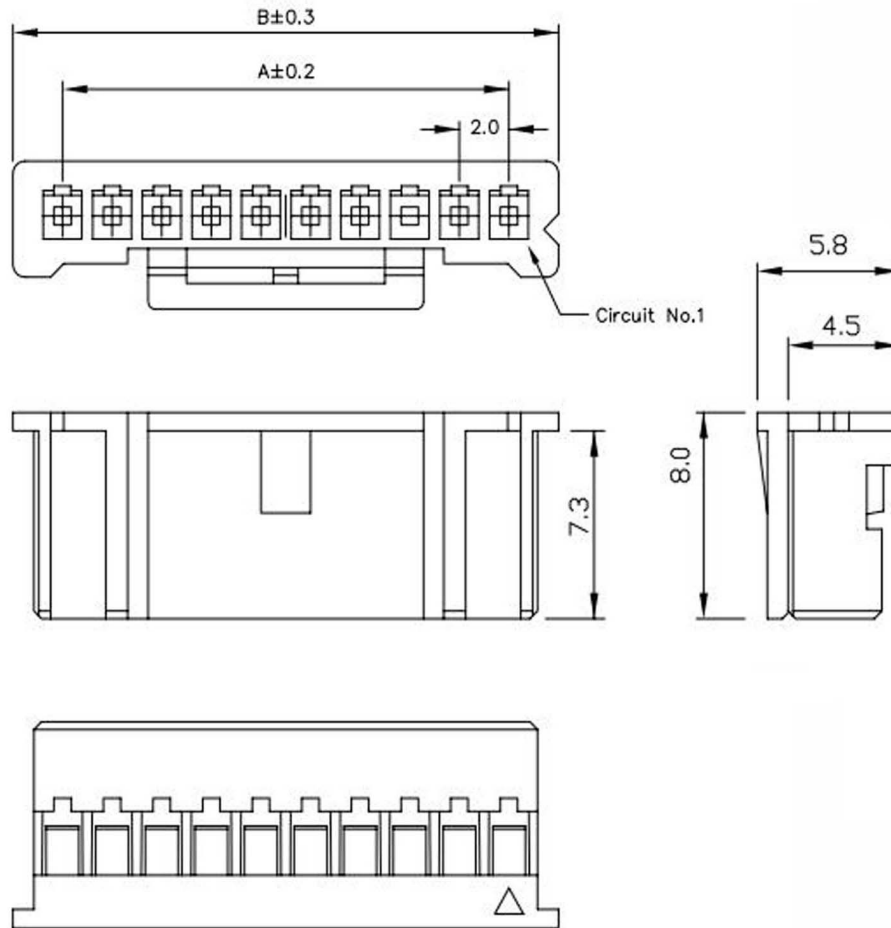

Poles	Dimension mm (in.)	
	A	B
10	18.0(0.709)	22.0(0.866)
11	20.0(0.787)	24.0(0.945)
12	22.0(0.866)	26.0(1.024)
13	24.0(0.945)	28.0(1.102)
14	26.0(1.024)	30.0(1.181)
15	28.0(1.102)	32.0(1.260)

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22

Voltage Rating: 250V AC/ DC

Temperature Range: -25°C ~ + 85°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:800V AC/Minute

Features:

Material: Nylon 66 UL 94V-0,natural

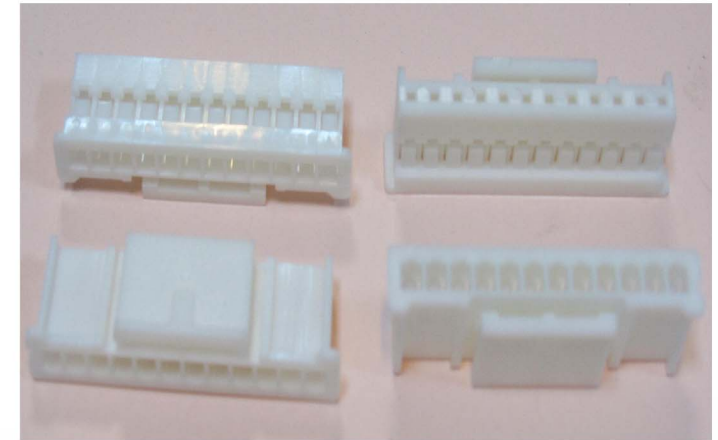

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2009/08/21



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ±0.25
.00 ±0.20
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

JST PA 2.0mm HOUSING 1XXXP
WITH LOCKING RIB WHITE COLOR

PART NO.

料號 H2012-XXPYW000R