


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H


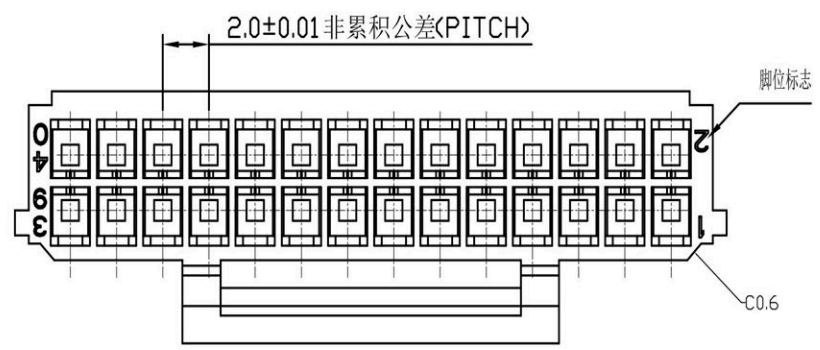


Specifications:

Electrical
 Rated Voltage: 250V AC,DC
 Rated Current: 2A
 Withstand Voltage: 800V AC/minute
 Contact Resistance: 10mΩ (MAX.)
 Insulation Resistance: 1000MΩ (MIN.)
 Temperature Range: -25°C~+85°C

Dimensional & Ordering Information:

Circuits	Dimension		
	A	B	C
2*2	2	4.6	5.6
2*3	4	6.6	7.6
2*4	6	8.6	9.6
2*5	8	10.6	11.6
2*6	10	12.6	13.6
2*7	12	14.6	15.6
2*8	14	16.6	17.6
2*9	16	18.6	19.6
2*10	18	20.6	21.6
2*11	20	22.6	23.6
2*12	22	24.6	25.6
2*13	24	26.6	27.6
2*14	26	28.6	29.6
2*15	28	30.6	31.6
2*16	30	32.6	33.6
2*17	32	34.6	35.6
2*18	34	36.6	37.6
2*19	36	38.6	39.6

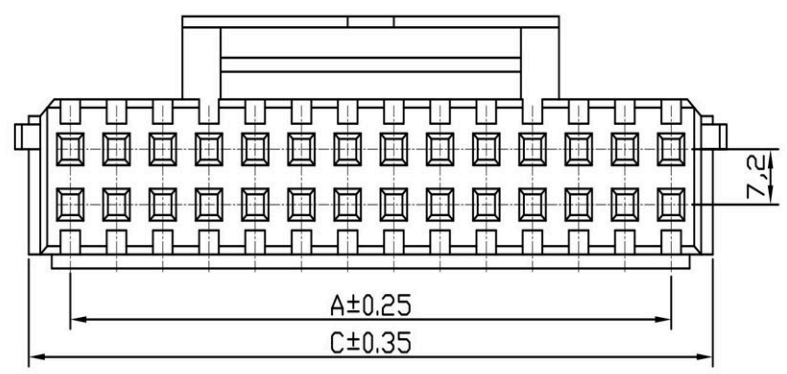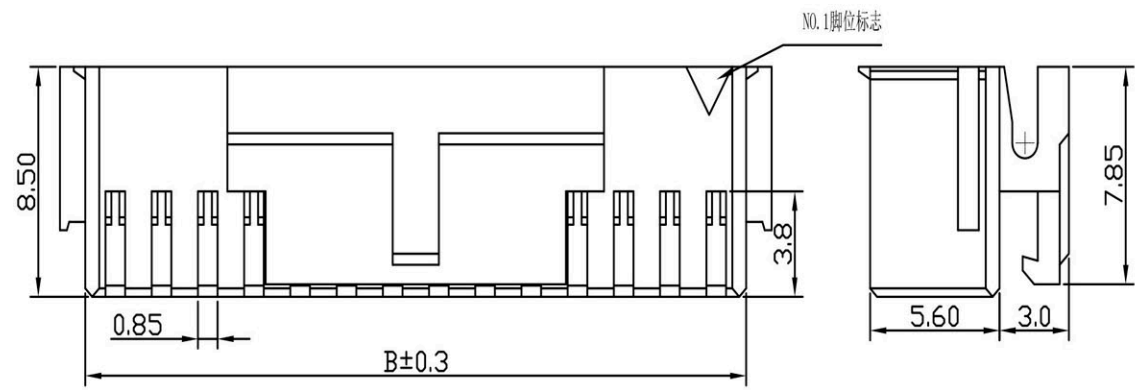

1 2 3 4 5 6 7 8

APPD. 核准 DWG. 製圖 <i>Helen</i> DATE 制表日 2015/8/19	RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	SCALE 比例 参考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± .00 ± ANG. ± SIZE 線規尺寸 A4 REV. 版本 A	PART NAME 品名 2.0mm HOUSING 2XXXP WHITE COLOR NYLON66 UL94V-0 ROHS PART NO. 料號 H2013-XXPDW000R

A
B
C
D
E
F
G
H