



1 2 3 4 5 6 7 8


A

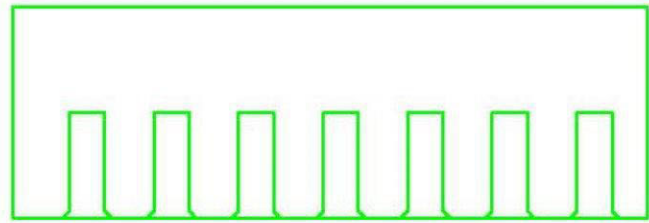

PITCH BETWEEN POLES:2.5mm  
 CURRENT RATING:2A  
 VOLTAGE RATING:250V  
 CONTACT RESISTANCE:INITIAL VALUE/10mΩ max.  
 AFTER ENVIRONMENTAL TESTING/20mΩ max.  
 INSULATION RESISTANCE:800 MΩ (min.)  
 WITHSTAND VOLTAGE:1000V AC/MINUTE  
 TEMPERATURE RANGE:-25°C TO +85°C  
 APPLICABLE WIRE:AWG#22 TO #28  
 FEATURES:  
 AVAILABLE NUMBER OF CIRCUITS 2 TO 16  
 MATERIAL:NYLON 66 UL94V-0


B

C

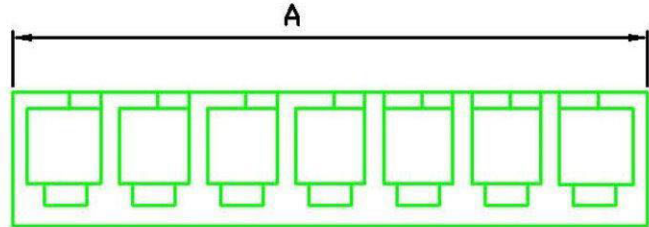

D

E

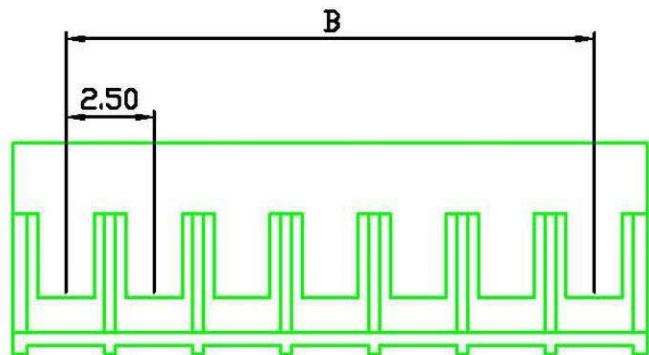

F

G

Poles	DIM:(mm)	
	A	B
2	6.5	2.5
3	9.0	5.0
4	11.5	7.5
5	14.0	10.0
6	16.5	12.5
7	19.0	15.0
8	21.5	17.5
9	24.0	20.0
10	26.5	22.5
11	29.0	25.0
12	31.5	27.5
13	34.0	30.0
14	36.5	32.5
15	39.0	35.0
16	41.5	37.5

H

1 2 3 4 5 6 7 8

APPD. 核准  DWG. HELEN  DATE 制表日 2011/3/28	RoHS Compliant	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>		
	SCALE 比例 参考	TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 2.5mm RIGHT ANGLE HOUSING 1X??P WHITE COLOR ROHS	
	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 H2502-XXPW1000R	
	PAGE 張數 1 OF 1	REV. 版次 A		

A

B

C

D

E

F

G

H