

1 2 3 4 5 6 7 8

A

B

C

D






E

F

G

H

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Pantone Color: 153C

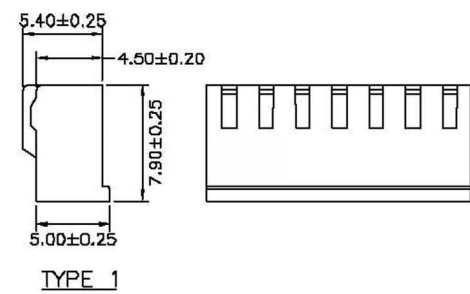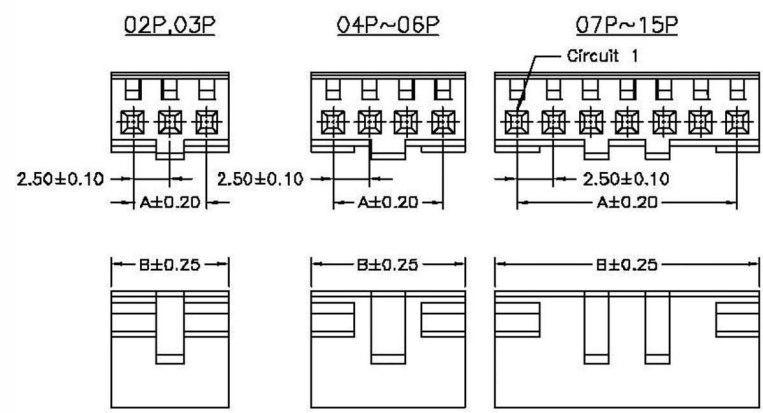

Ordering Information & Dimensions

PIN	Dimensions	
	A	B
02P	2.50	5.50
03P	5.00	8.00
04P	7.50	10.50
05P	10.00	13.00
06P	12.50	15.50
07P	15.00	18.00
08P	17.50	20.50
09P	20.00	23.00
10P	22.50	25.50
11P	25.00	28.00
12P	27.50	30.50
13P	30.00	33.00
14P	32.50	35.50
15P	35.00	38.00

H 2505 — 02 P N 0 0 0 0 R

- 1. PRODUCTS: H:Housing
- 2. SERIES NO.: 2505
- 3. CONTACT NO.: 02-15
- 4. CONTACT TYPE: P:Non Distribution
- 5. INSULATOR COLOR: N:Brown
- 6. FILL IT WITH*0"
- 7. FILL IT WITH*0"
- 8. FILL IT WITH*0"
- 9. FILL IT WITH*0"
- 10. R:ROHS

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE 容許公差 .0 ±0.25 .00 ±0.15 ANG. ±	PART NAME 品名 2.5mm HOUSING- XX P BROWN COLOR ROHS
DWG. 製圖 Yumi		UNIT 單位 M M	SIZE. 紙張尺寸 A 4
DATE 制表日 2008/07/22	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 H2505-XXPN0000R

1 2 3 4 5 6 7 8