


P.C.B LAYOUT

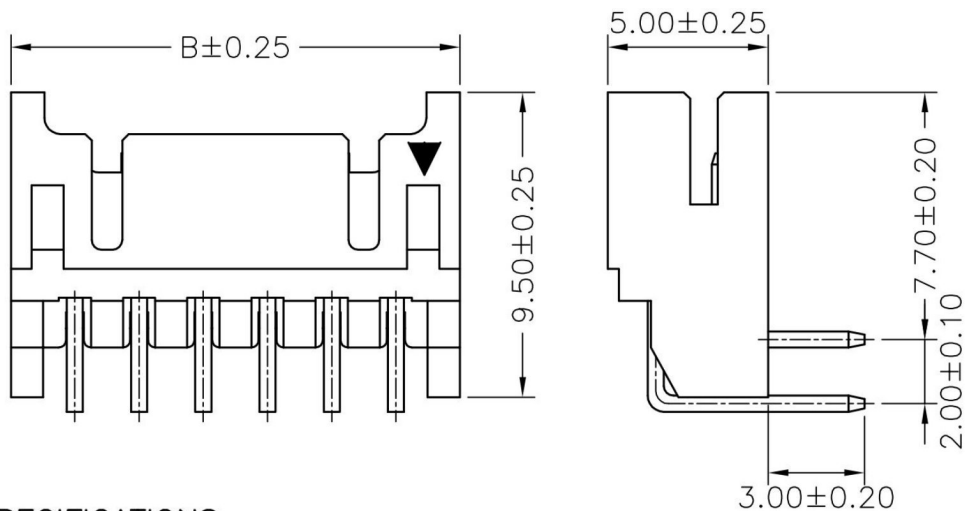

Dimensions

CONTACT NO.	Dimensions	
	A	B
2X02P	2.00	6.00
2X03P	4.00	8.00
2X04P	6.00	10.00
2X05P	8.00	12.00
2X06P	10.00	14.00
2X07P	12.00	16.00
2X08P	14.00	18.00
2X09P	16.00	20.00
2X10P	18.00	22.00
2X11P	20.00	24.00
2X12P	22.00	26.00
2X13P	24.00	28.00
2X14P	26.00	30.00
2X15P	28.00	32.00
2X16P	30.00	34.00
2X17P	32.00	36.00
2X18P	34.00	38.00
2X19P	36.00	40.00
2X20P	38.00	42.00

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Black

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	GENERAL TOLERANCE X. X±0.25 X. XX±0.15 X. XXX±0.05	PART NAME 品名 2.00mm WAFER DUAL ROW RIGHT ANGLE TYPE 2XXXP TIN PLATING BLACK INSULATOR BAG PACKING ROHS
DWG. 製圖 BETTY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 W2101-XXPDRTBBR
DATE 制表日 2011/09/02	PAGE 張數 1 OF 1	REV. 版次 A	