

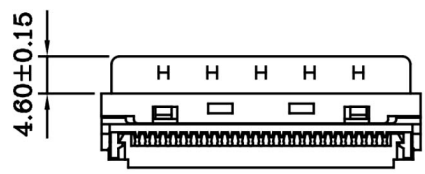

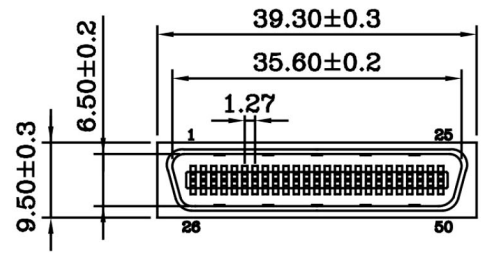






1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H



Termination Cover
(1 Places)



Wire Holder : 0.62mm
(2 Places)

• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C



****WIRE HOLDER : 28AWG**

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 1.27mm SCSI II CENTRONIC IDC TYPE CONNECTOR 50P MALE FLAG HOOK SPRING LATCH T=0.3mm ENTRY HOLE SIZE:φ9.0 WIRE HOLDER:0.62mm(FOR 28AWG) PLASTIC HOOD:IVORY COLOR HP CEN. 50P MALE ROHS
DWG. 製圖 BETTY	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 C0506-50MFSX10R
DATE 制表日 2010/10/05	PAGE 張數 1 OF 2	REV. 版次 A	

1 2 3 4 5 6 7 8

• MATERIALS:(RoHS Compliant)

Hood: Plastic Thermoplastic ABS UL 94V-0
 Latch Cover: Plastic Thermoplastic ABS UL 94V-0
 Latch: Stainless Steel
 Inner Shell: Steel Nickel Plated Over Copper

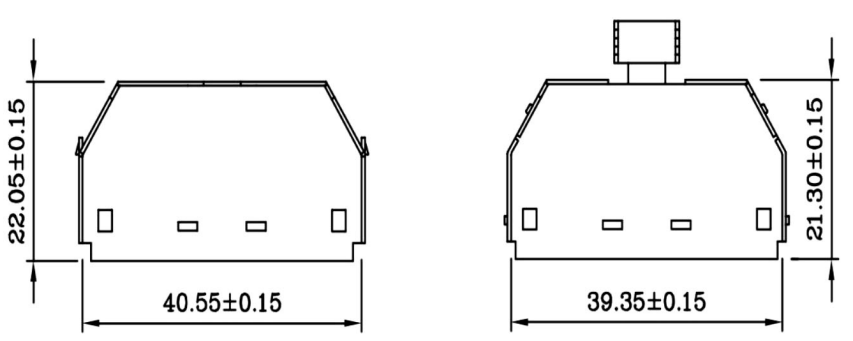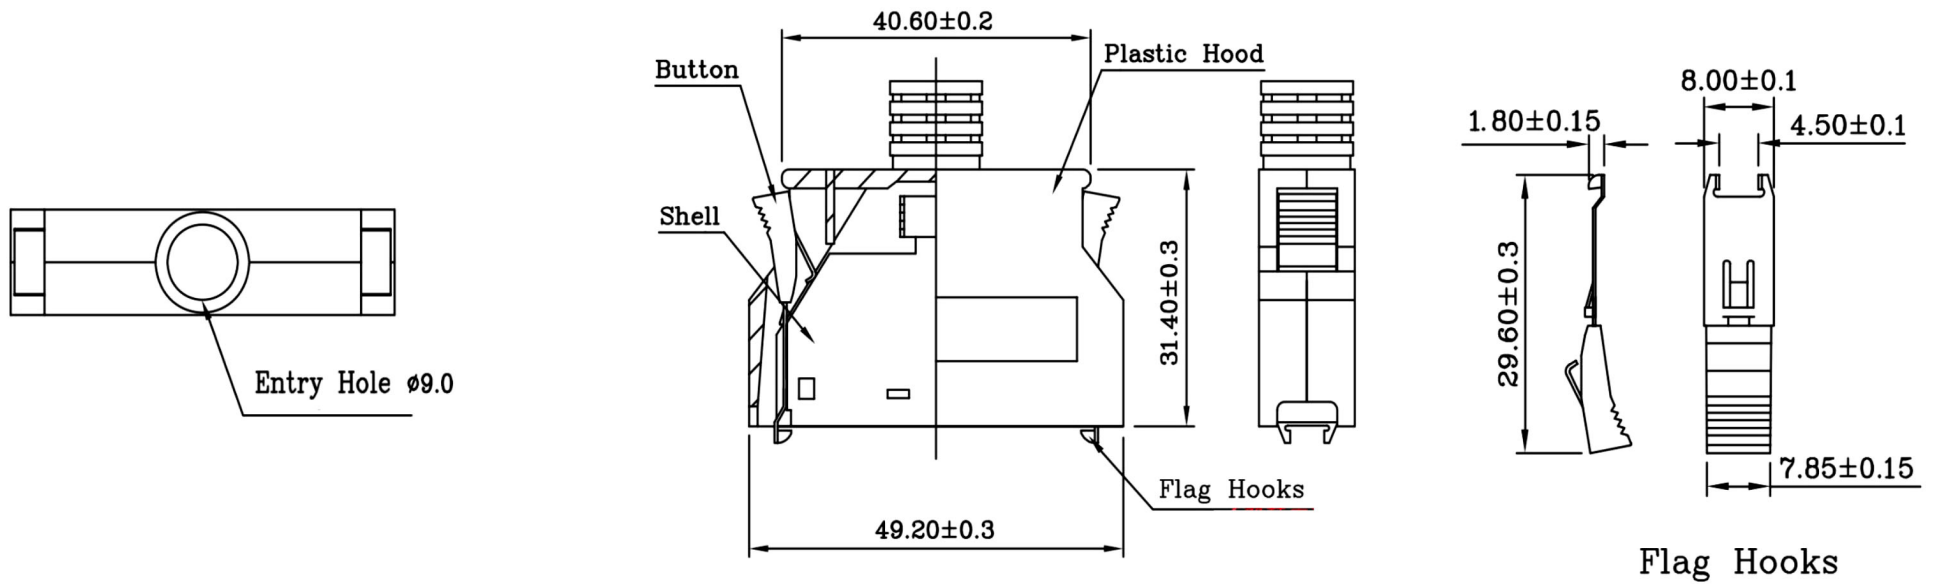

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 .00 ± .ANG. ±	PART NAME 品名 1.27mm SCSI II CENTRONIC IDC TYPE CONNECTOR 50P MALE FLAG HOOK SPRING LATCH T=0.3mm ENTRY HOLE SIZE:φ9.0 WIRE HOLDER:0.62mm(FOR 28AWG) PLASTIC HOOD:IVORY COLOR HP CEN. 50P MALE ROHS
DWG. 製圖 BETTY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C0506-50MFSX10R
DATE 制表日 2010/10/05	PAGE 張數 2 OF 2	REV. 版次 A	

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8