




L Type

• **MATERIALS:(RoHS Compliant)**

- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Bracket: Zinc Alloy, Nickel Plated
Over Copper

• **ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +85°C

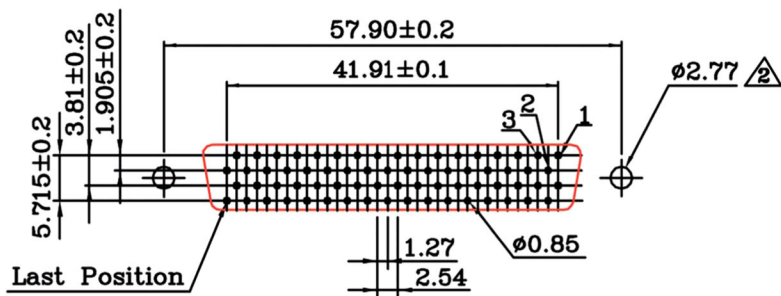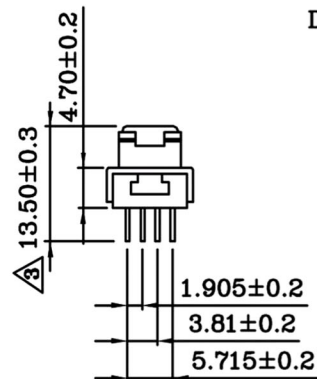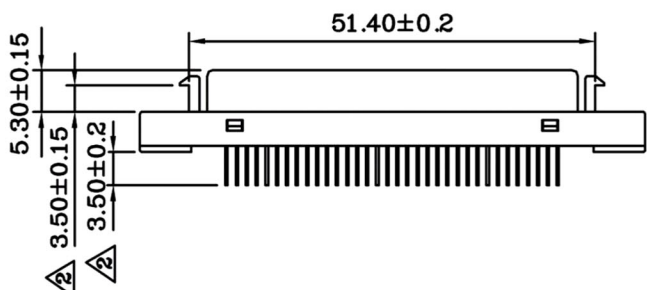

PCB Layout

**RoHS
Compliant**

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名 SCSI-II CENTRONIC PCB 180° 1.27mm 68P FEMALE THREAD INSERT M2.6 UNC W/Front LATCH METAL SHELL SELECTIVE GOLD 5U" PLATING STANDARD TYPE BLACK INSULATOR ROHS
DWG. 製圖	Hedy	SCALE 比例 參考 X:1	
DATE 制表日 2014/08/14	PAGE 張數 1 / 1	UNIT 單位 MM	SIZE. 紙張尺寸 A 4
		REV. 版次 A	PART NO. 料號 C0511-68FADEB1R