





	1	2	3	4	5	6	7	8
A	<p>● MATERIALS: (RoHS Compliant)</p> <p>Housing: Plastic Thermoplastic P.B.T UL94V-0 Black</p> <p>Contacts: Phosphor Bronze Gold Selective Plated</p> <p>Front Shell: Steel Nickel Plated Over Copper</p>							
B								
C	<p>● ELECTRICAL CHARACTERISTICS:</p> <p>Contact Current Rating: 0.5 Amp</p> <p>Dielectric Withstanding Voltage: 500V AC</p> <p>Insulation Resistance: >500MΩ/Min</p> <p>Contact Resistance: 35mΩ/Max</p> <p>Operation Temperature: -55°C ~ +85°C</p>							
D								
E								
F								
G								
H								
	1	2	3	4	5	6	7	8

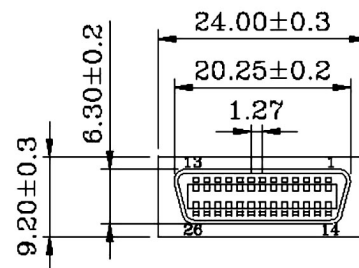


RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 0 .00 ± ANG ±	PART NAME 品名 1.27mm SCSI II CEN. SOLDER CONNECTOR 26P FEMALE HOOD:IVORY COLOR ROHS
DWG. 製圖 ABBY		SCALE 比例 參考	
DATE 制表日 2013/01/31	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C0517-26FXXXI0R
	PAGE 張數 1 OF 2	REV. 版次 A	

• MATERIALS:(RoHS Compliant)

Hood: Plastic Thermoplastic ABS UL 94V-0
 Latch Cover: Plastic Thermoplastic ABS UL 94V-0
 Latch: Stainless Steel
 Inner Shell: Steel Nickel Plated Over Copper




ENTRY HOLE SIZES:
 7= $\varnothing 7.0$
 8= $\varnothing 8.0$
 8A= $\varnothing 8.5$

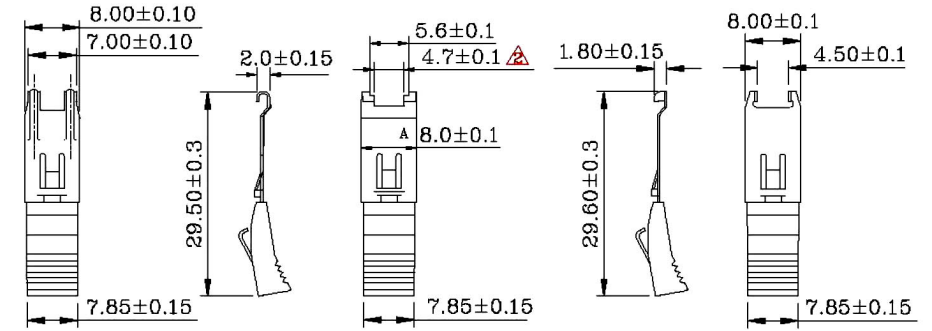


L=Fish Hooks

F=Fish Hooks

S=Flag Hooks

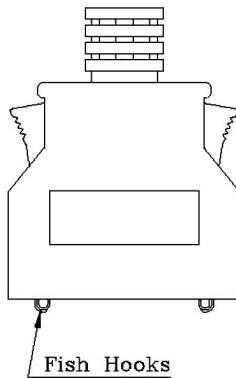

Fish Hooks

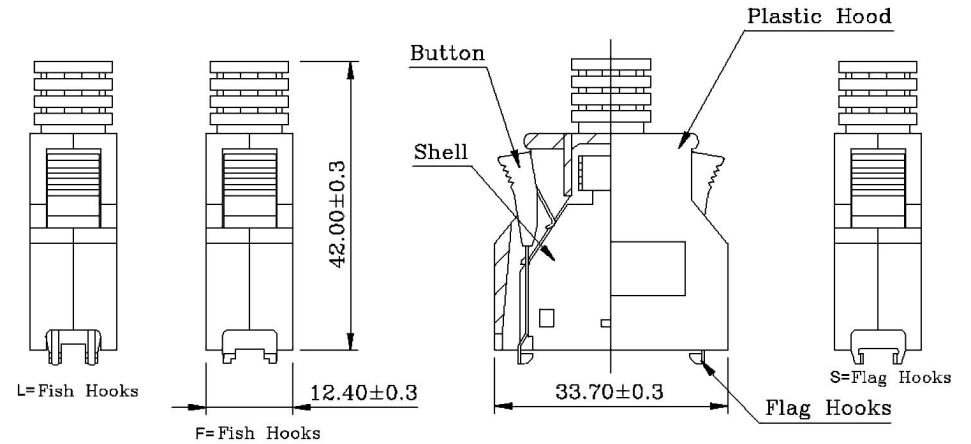


L=Fish Hooks

F=Fish Hooks

S=Flag Hooks

Flag Hooks

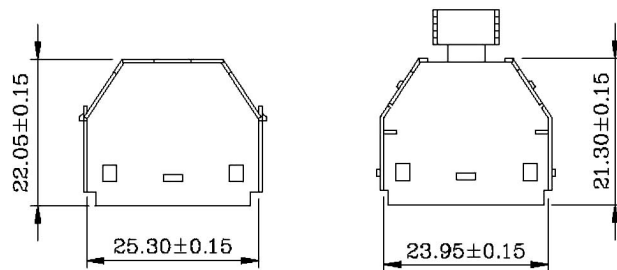

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0.00 ± ANG ±	PART NAME 品名 1.27mm SCSI II CEN. SOLDER CONNECTOR 26P FEMALE HOOD:IVORY COLOR ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C0517-26FXXXI0R
DATE 制表日 2013/01/31	PAGE 張數 2 OF 2	REV. 版次 A	