


PCB Layout

● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

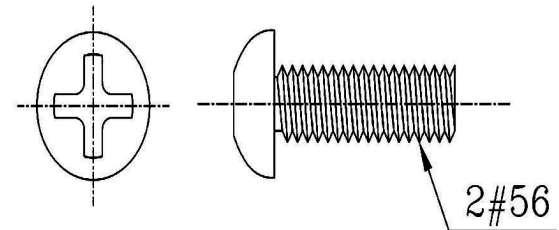

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 SCSI-II D-SUB PCB 180° 1.27mm 68PIN FEMALE THREAD INSERT 2-56UNC WITH FRONT LATCH METAL SHELL SELECTIVE GOLD 5U" PLATING BLACK INSULATOR(ADD ROUND SCREWS 3.4*5.8mm) REVERES TYPE ROHS
DWG. 製圖 Lena		UNIT 單位 M M	PART NO. 料號 C0518-68FAAEB0R
DATE 制表日 2023/6/26	PAGE 張數 1 OF 1	REV. 版次 D	