


• MATERIALS:(RoHS Compliant)



Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

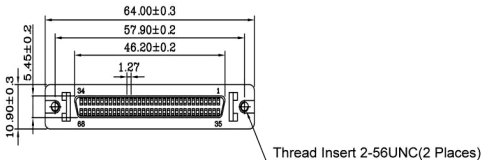

Metal Shell W/ Front Latch

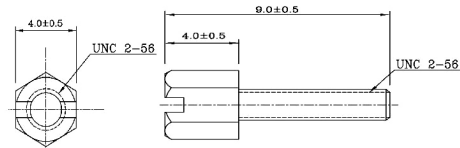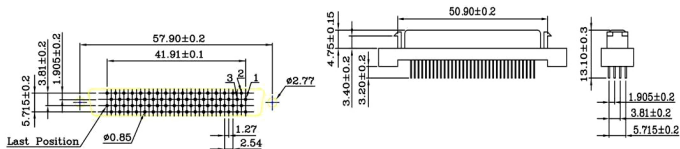

RoHS Compliant		HSM 宏茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPR. 核准: BETTY	SCALE 比例: 1:1	TOLERANCE 容許公差: 0.1 ± 0.05 ± 0.02 ±	PART NAME 品名: SCSII-D-SUB PCB 180* 1.27mm
DWG. 圖號: BETTY	UNIT 單位: MM	SIZE 紙張尺寸: A4	68P THREAD INSERT 2-56UNC W/Front LATCH METAL SHELL
DATE 制表日: 2011/11/7	PAGE 頁數: 1 OF 1	REV. 版本: C	PART NO. 料號: C0518-68FAEEBOR