
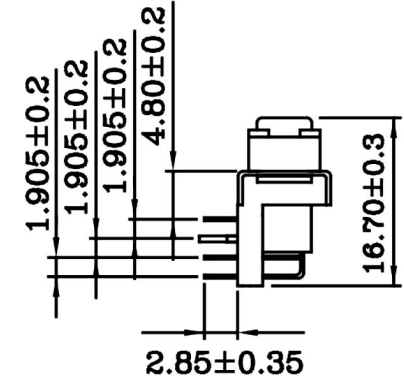
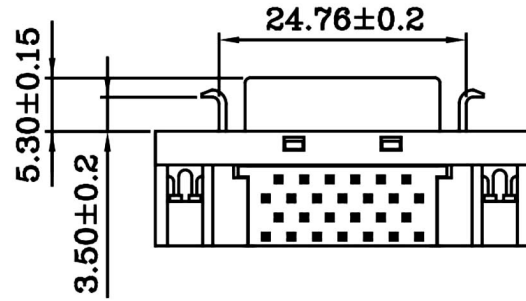
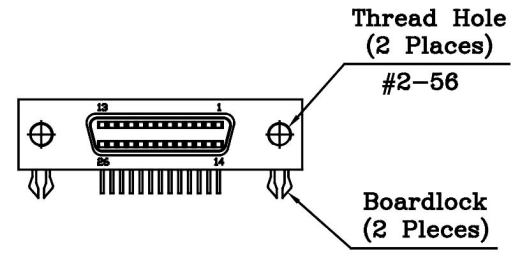
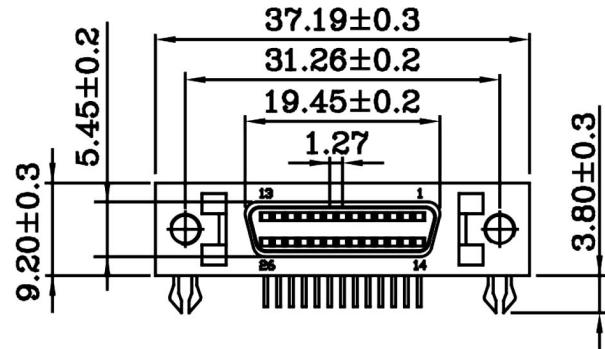


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

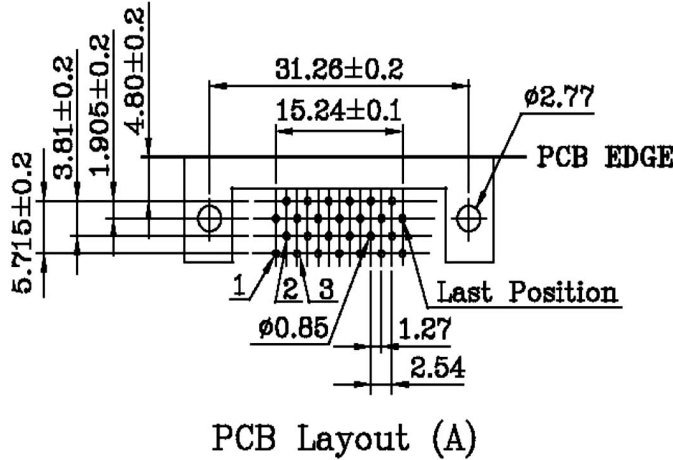

- **MATERIALS:(RoHS Compliant)**  
 Housing And Cover: Plastic Thermoplastic P.B.T UL94V-0 Black  
 Contacts: Phosphor Bronze Gold Selective Plated  
 Front Shell: Steel Nickel Plated Over Copper  
 Bracket: Steel Nickel Plated Over Copper  
 Boardlock: Brass Tin Plated Over Copper

- **ELECTRICAL CHARACTERISTICS:**  
 Contact Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +85°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 SCSI-II D-SUB PCB 90°1.27mm 26F THREAD INSERT 2-56UNC W/Front Latch W/BOARDLOCK SELECTIVE GOLD 5U" PLATING BLACK COLOR ROHS LOW-LEAD
DWG. 製圖 Betty		UNIT 單位 M M	PART NO. 料號 C0519-26FAZAEBR
DATE 制表日 2017/09/20	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 版次 D

1 2 3 4 5 6 7 8