

PN:C0550-XXMUAXXBR



ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:30Milliohms Max.
 Operation Temperature : -55°C to +105°C.


Material

Contact :Copper Alloy.
 Insulator:PBT. (Select PA6T /LCP /PA9T)
 Shell: SPCC.
 Z-Piece: Copper Alloy.
 Screw: Copper Alloy.
 Rivet: Copper Alloy. or Zinc.

No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

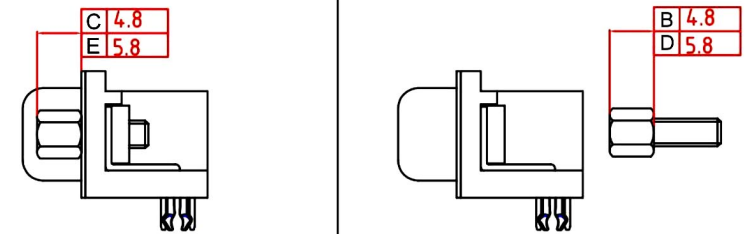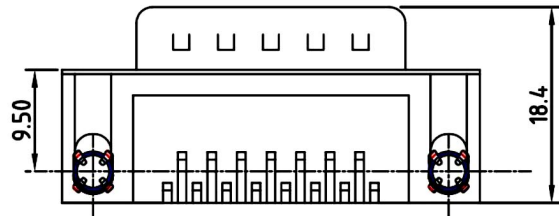

PN:C0550-XXMU(C、E)XXBR | PN:C0550-XXMU(B、D)XXBR

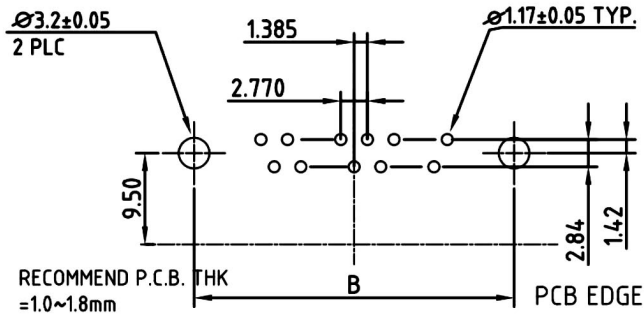

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 BETTY</p>	<p>SCALE 比例 参考</p>	<p>TOLERANCE 容許公差 X ±0.30 XX ±0.25 XXX ±0.15 Ang. ±2°</p>	<p>PART NAME 品名 D-SUB PCB RIGHT ANGLE 7.2mm STAMPED PIN XXP MALE RIVET W/4-PRONG BOARDLOCK BLACK INSULATOR ROHS</p>
<p>DWG. 製圖 ABBY</p>	<p>UNIT 單位 M M</p>	<p>SIZE 紙張尺寸 A 4</p>	<p>PART NO. 料號 C0550-XXMUXXBR</p>
<p>DATE 制表日 2017/08/29</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 A</p>	