


P. C. B LATOUT

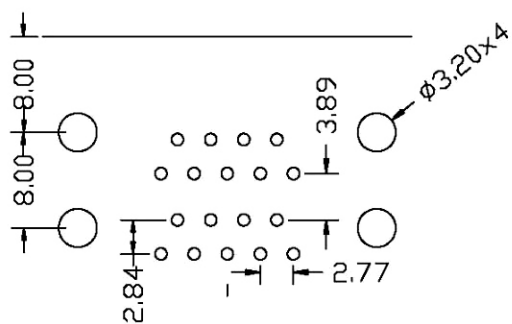

- Contact Resistance: 30mΩ max. at DC 100mA
- Insulator Resistance: 1000mΩ min. at DC 500V
- Current Rating: 5AMP
- Dielectric Withstanding Voltage: AC 1000V For 1 minute
- Operating Temperature: -55 °C ~ +105 °C
- Contact: Brass
- Housing: PBT & 30% Glass Fiber (UL 94V-0)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 零件公差	PART NAME 品名
DWG. 製圖	HELEN	0 ± 0.25 .00 ± ANG ±	D-SUB RIGHT ANGLE DUAL PORT DB9M/DB9F DUAL BOARDLOCK (CENTER LINE 7.9mm) NON ACCESSROIES ROHS LOW-LEAD PORT SPACING 15.875mm BLACK INSULATOR
DATE 制表日	2010/10/15	UNIT 單位	PART NO.
		M M	料號
		PAGE 張數	C0553-09BDAAXBR
		1 OF 1	
		REV. 版本	
		A	