
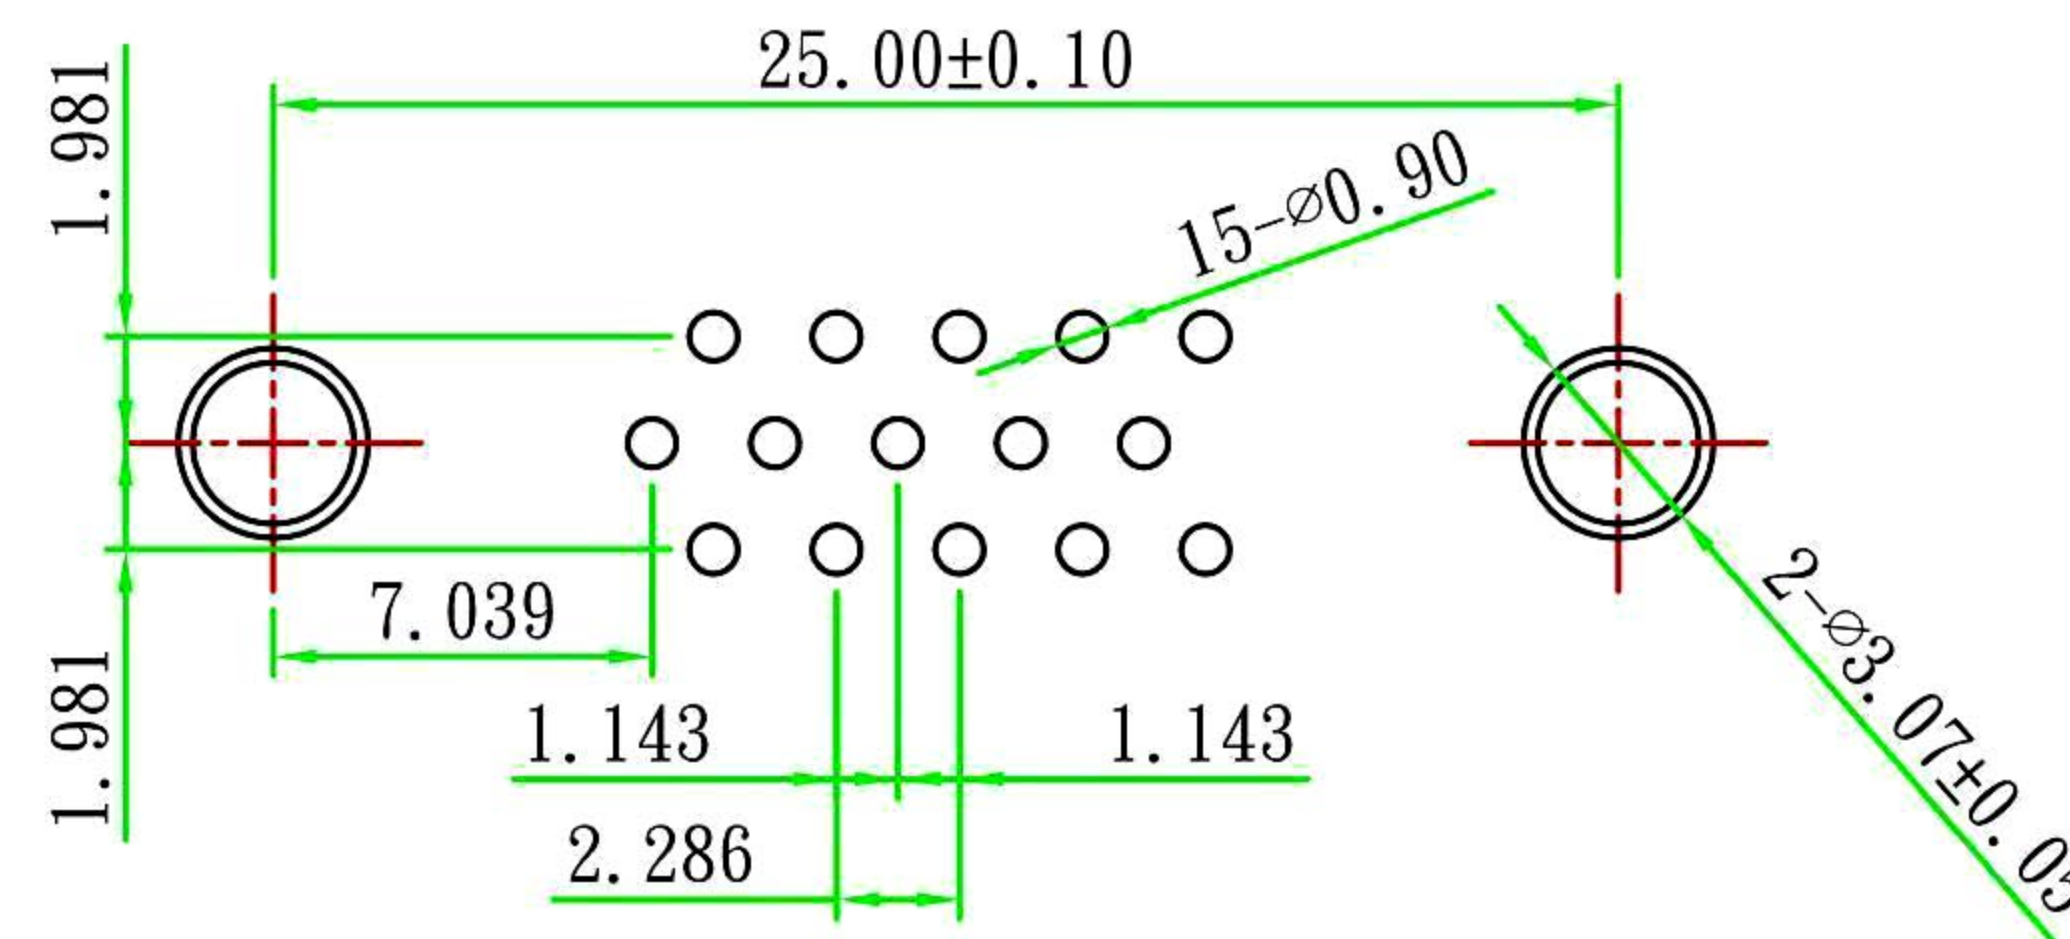


MATERIAL:
 Insulator: PBT+30% Glass Fiber
 UL94V-0
 Pin contacts: Brass or Phosphor Bronze
 Gold Plated & Tin plated
 Shell: Steel, SPCC
 Nickel & Tin Plated

ELECTRICAL DATA:
 Rated Voltage: 350V AC
 Rated Current: 5A
 Withstand Voltage: 500V AC(RMS)
 Insulation Resistance: Over 1000MΩ
 Contact Resistance: 5MΩ AT 1A
 Temperature: -40°C ~ +100°C

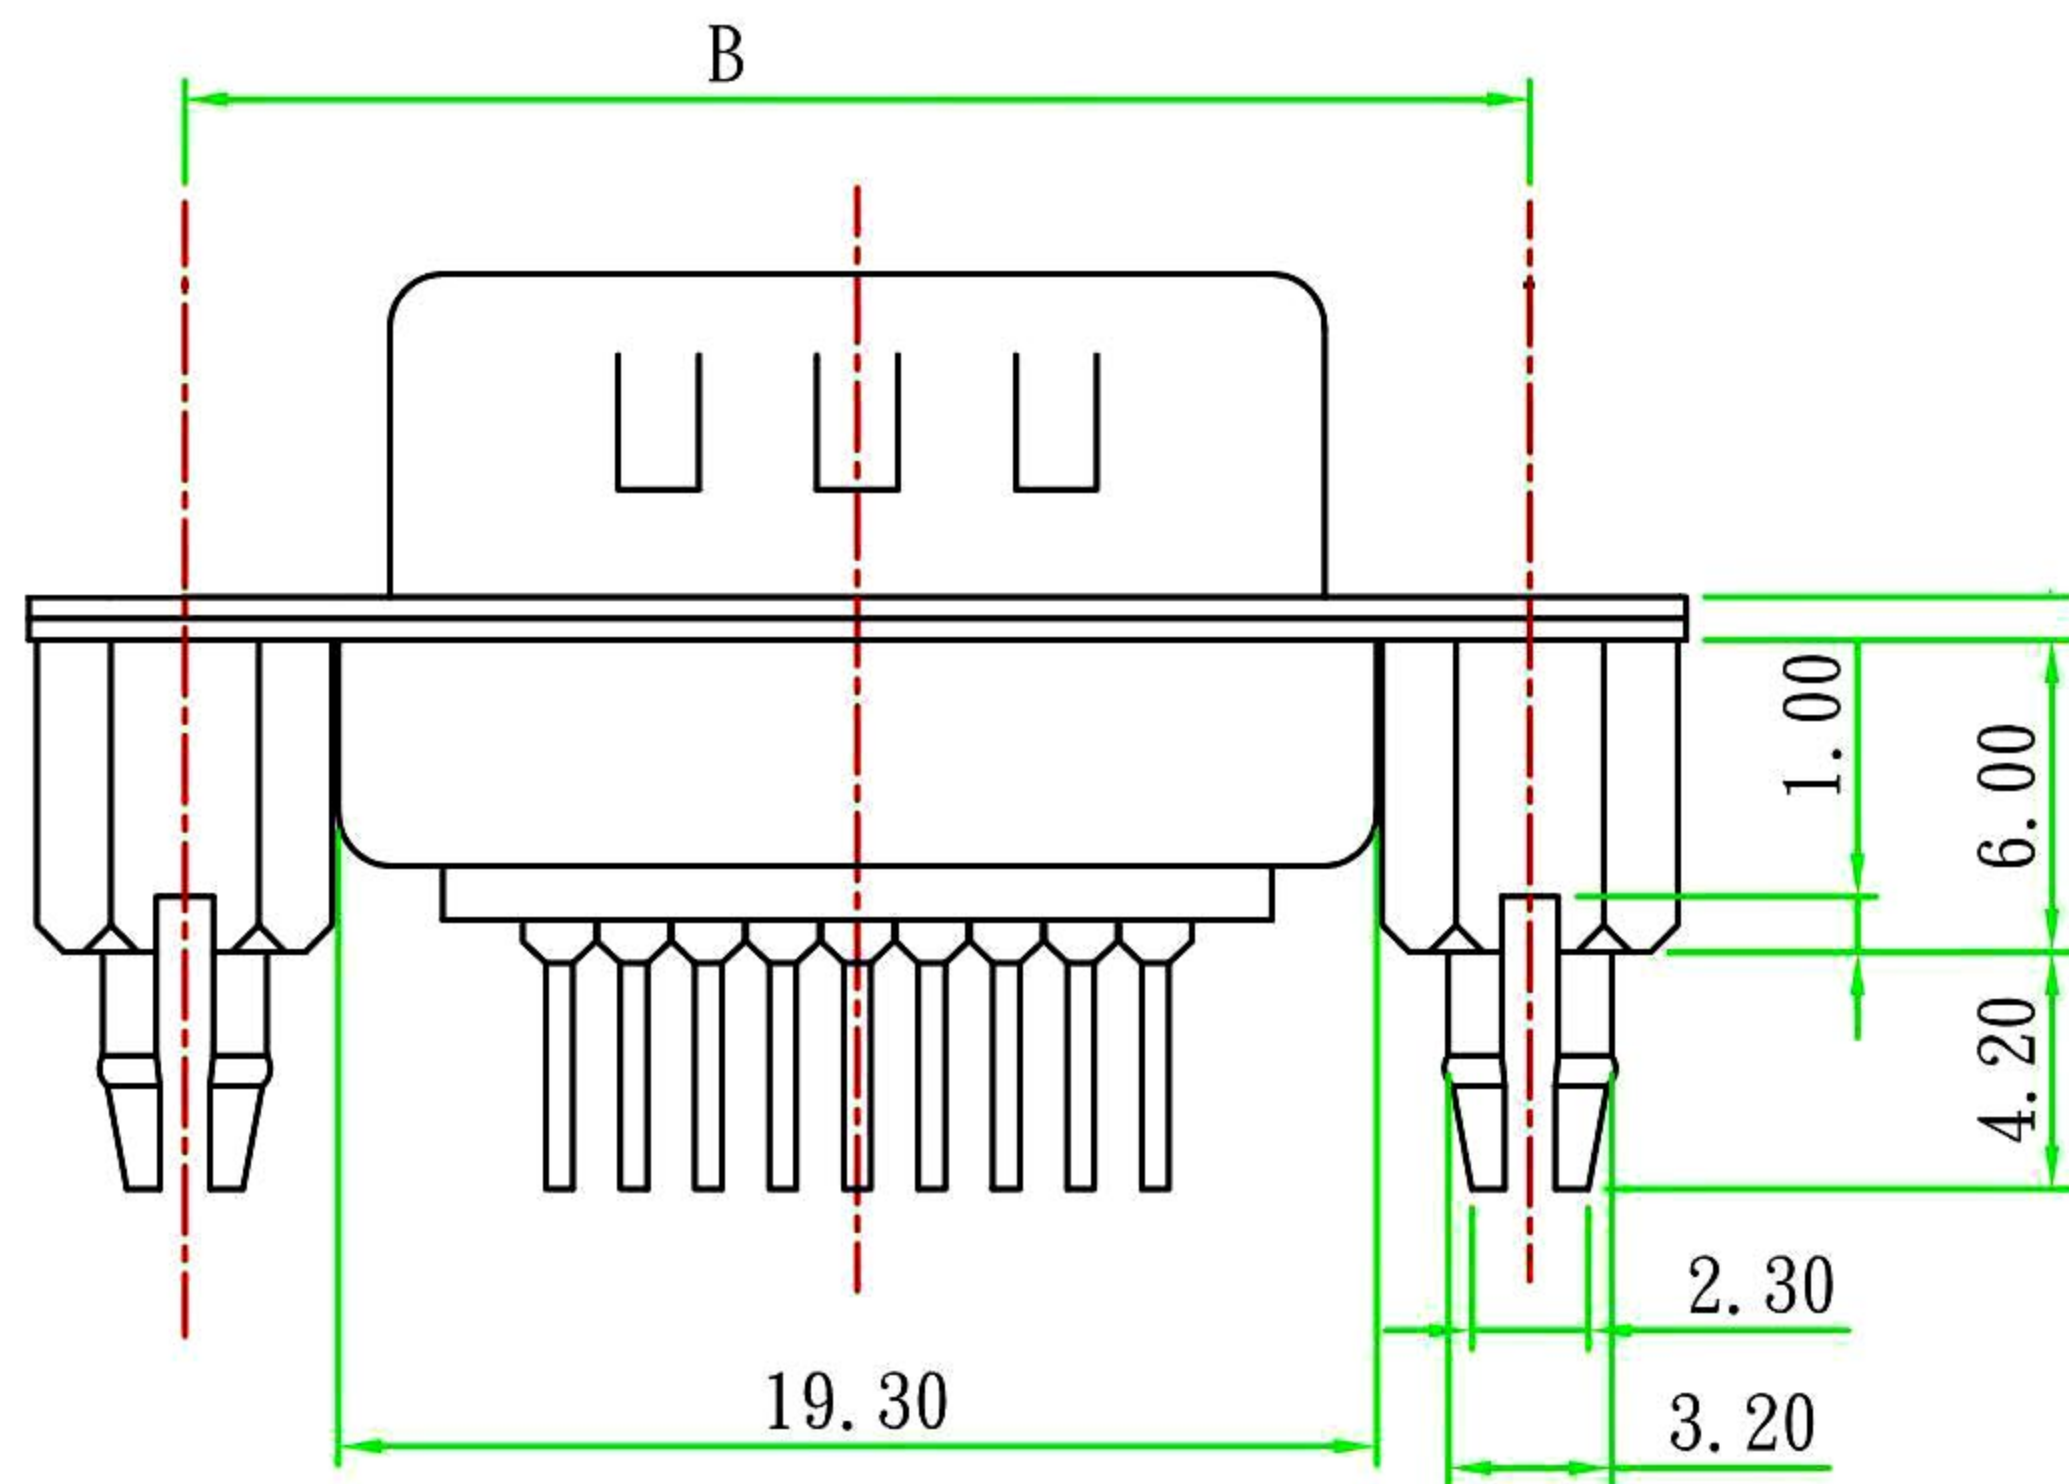

P. C. BOARD LAYOUT

| P | A±0.13 | B±0.10 | C±0.13 | D±0.13 | E±0.13 |
|-----|--------|--------|--------|--------|--------|
| 15P | 30.80 | 25.00 | 16.90 | 8.30 | 12.50 |
| 26P | 39.20 | 33.30 | 25.25 | 8.30 | 12.50 |
| 44P | 53.05 | 47.05 | 38.95 | 8.30 | 12.50 |
| 62P | 69.40 | 63.50 | 55.40 | 8.30 | 12.50 |

| | | |
|---------------------------------|--|---|
| RoHS Compliant | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| | APPD. | TOLERANCE .0 ± .00 ± ANG. ± |
| DWG. Helen | SCALE 参考 UNIT M M PAGE 1 OF 1 | PART NAME 品名 H. D. D-SUB PCB STRAIGHT STAMPED PIN XXP MALE REAR RIVET 6mm BOARDLOCK (TIN or NICKEL) SHELL+DIMPLE ROHS |
| DATE 2014/12/18 | SIZE. A 4 REV. B | PART NO. C0561-XXMIE(A,B)XXR 料號 |