



- 一. MATERIAL:
- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
 - 2.Contact:Brass
 - 3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
 - 4.Shell:Steel,Nickel Plated
- 二. SPECIFICATION:
- 1.Current Rating:5 AMPS
 - 2.Insulation Resistance: 5000M Ω , MIN. At 500VDC
 - 3.Dielectric Strength: 500V for One minute
 - 4.Operation Temperature: -55° C~+105° C.

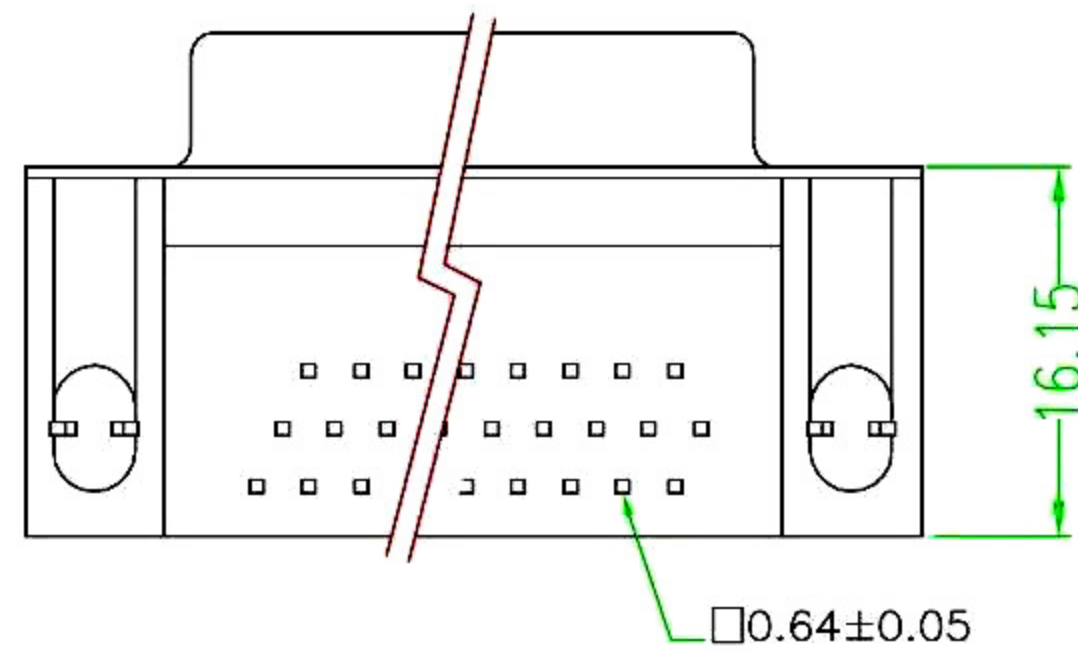

| PINS | DIM | A±0.30 | B±0.30 | C±0.30 | D±0.10 |
|------|-----|--------|--------|--------|--------|
| 15 | | 30.80 | 24.99 | 16.30 | 2.29 |
| 26 | | 39.20 | 33.30 | 24.60 | 2.29 |
| 44 | | 53.10 | 47.04 | 38.30 | 2.29 |
| 62 | | 69.34 | 63.50 | 54.80 | 2.41 |

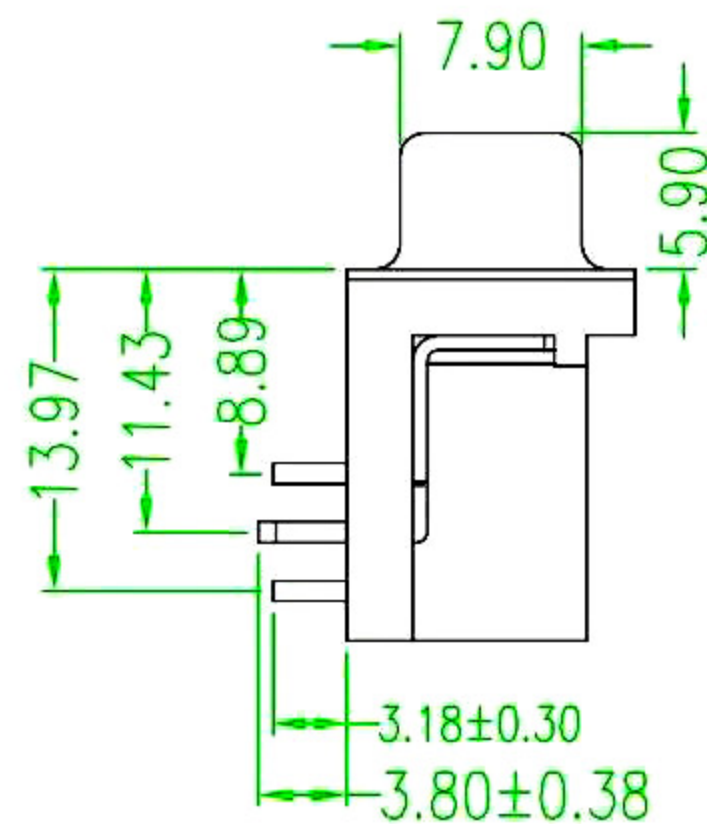

| | | | |
|--------------------|----------------|---|---|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 | SCALE 比例 参考 | TOI FRANCE .0±0.25 .07±1.0 .00±0.20 .007±0.5 .000±0.05 .0007±0.1 | PART NAME 品名 HIGH DENSITY D-SUB PCB RIGHT ANGLE STAMPED PIN XXP FEMALE RIVET W/ BOARDLOCK W/O SCREWS NICKEL SHELL BLACK INSULATOR ROHS |
| DWG. 製圖 Helen | UNIT 單位 MM | SIZE 紙張尺寸 A4 | PART NO. 料號 C0562-XXFBANXBR |
| DATE 制表日 2018/7/27 | PAGE 張數 1 OF 1 | REV. 版本 A | |