

**ELECTRICAL CHARACTERISTICS:**


CONTACT CURRENT RATING: 1 AMPERES.  
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R. M. S.  
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V  
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM  
 OPERATING TEMPERATURE: -55°C TO +105°C

**MATERIALS:**

CONTACT: BRASS  
 INSULATOR: P. B. T. UL94V-0 RATED  
 SHELL: GOLD ROLLED STEEL

**FINISHES:**

CONTACTS: GOLD FLASHED.  
 SHELL: NICKEL, TIN PLATED.

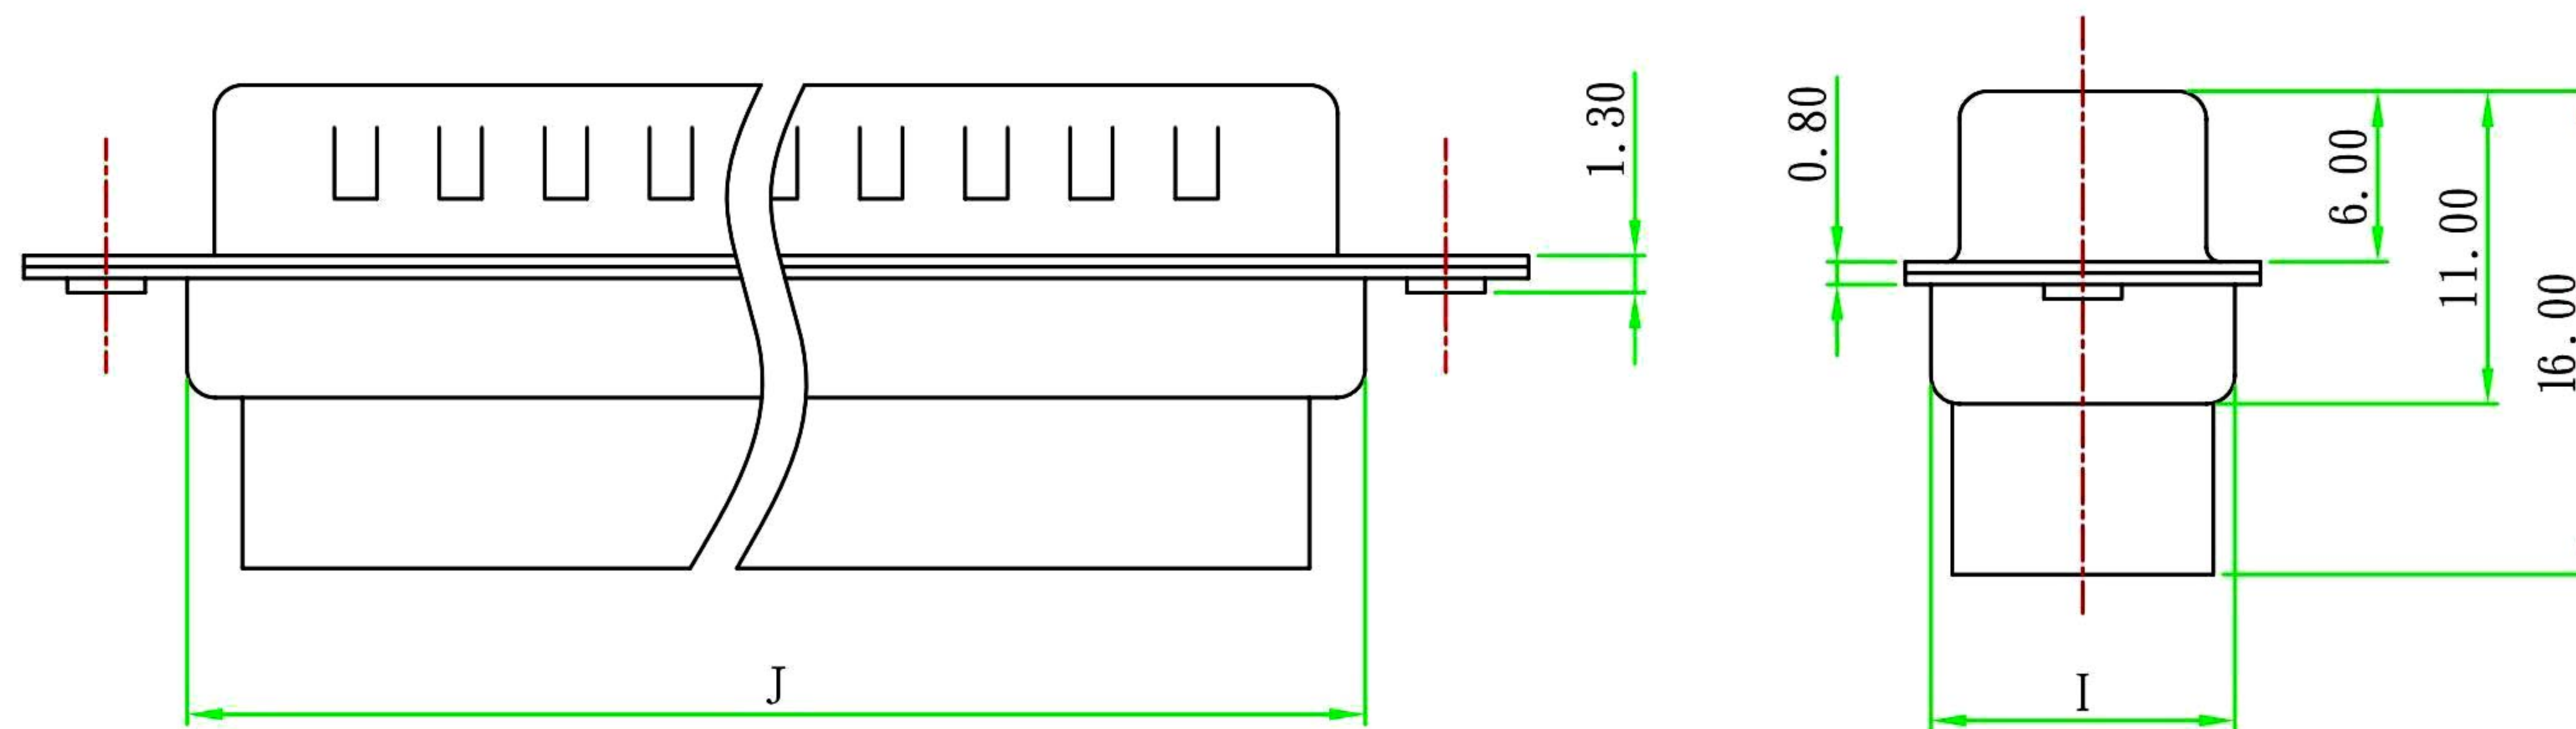

M/F DIM	A	B	C	D	E	F	G	H	I	J
15P	16.90	25.00	30.80	8.40	12.50	7.039	2.286	1.981	10.70	19.30
26P	25.30	33.30	39.10	8.40	12.50	6.871	2.286	1.981	10.70	27.50
44P	39.00	47.00	53.00	8.40	12.50	6.863	2.286	1.981	10.70	41.30
62P	55.40	63.50	69.30	8.40	12.50	6.998	2.413	1.981	10.70	57.70
78P	52.90	61.10	66.90	11.20	15.40	7.627	2.413	2.083	13.60	55.30

**RoHS  
Compliant**

**HSM 玄茂科技股份有限公司  
Hsuan Mao Technology CO., LTD.**

APPD.		TOLERANCE	PART NAME 品名
DWG. Helen	SCALE 参考	.0 ± .00 ± ANG. ±	HIGH DENSITY D-SUB CRIMPING HOUSING MALE THROUGH HOLE ROHS LOW-LEAD
DATE 2012/11/9	UNIT M M	SIZE. A 4	PART NO. C0563-XXMAAXX0R
	PAGE 1 OF 1	REV. C	料號