
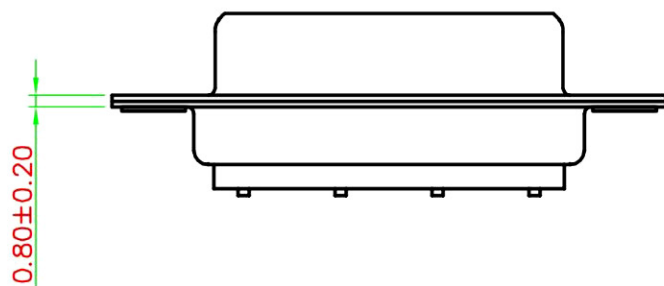


3 PCS



MATERIALS AND FINISH
SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR
COAXIAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS
COAXIAL CONTACT IMPEDANCE : 50Ω
COAXIAL CONTACT RESISTANCE : 2.7 mΩ MAX.
INSULATION RESISTANCE : 10⁷mΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

Tolerance ± 0.30

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 D-SUB COAXIAL SOLDER TYPE 3W3 FEMALE 50 OHMS THROUGH HOLE TIN SHELL WITH SIGNAL CONTACT GOLD PLATING BLACK INSULATOR ROHS	
DWG. 製圖 KAREN		SCALE 比例 參考	UNIT 單位 MM
DATE 制表日 2012/07/27	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4	REV. 版本 A
		PART NO. 料號 C0590-AFAAT0GBR	