

SWITCH CIRCUIT DIAGRAM.

RECOMMENDED P.C.B LAYOUT
TOLERANCE:±0.05


- C1:VCC
- C2:RST
- C3:CLK
- C4:Reserved
- C5:GND
- C6:VPP
- C7:I/O
- C8:Reserved

1.SPECIFICATIONS:

INSULATION RESISTANCE: 500M min. AT DC 500V
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100mΩ max.
 CURRENT RATING: 2A MAX.
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP.RANGE:-55°C~+85°C
 MATING CYCLES: 5,000 INSERTIONS

2.MATERIAL:

INSULATOR: HI-TEMPERATURE PLASTIC,UL 94V-0, BLACK
 TERMINAL: COPPER ALLOY;
 SWITCH: COPPER ALLOY;
 FINISH: 3U" MN GOLD PLATING ON ALL CONTACT AREAS,AND 120U" TIN PLATED,50-100U" NICKEL UNDERPLATED.

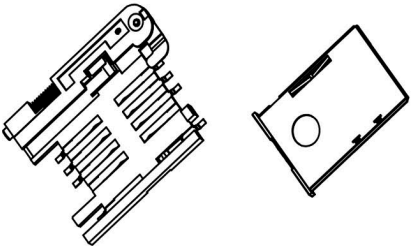

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	Betty	DATE 制表日	2024/05/14
DWG. 製圖		PAGE 張數	1 OF 1

SCALE 比例	參考	UNIT 單位	MM
DATE 制表日	2024/05/14	PAGE 張數	1 OF 1

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
X +/-	0.30	0.30
XX +/-	0.20	0.20
XXX +/-	0.10	0.10
FRACTIONS +/-		
ANGLES +/-	0.5°	
PART NAME 品名		
SIM CARD CONNECTOR WITH HOLDER 6PIN SMT TYPE SELECTIVE GOLD 3U" PLATING BLACK COLOR ROHS		
PART NO.		
料號 C0652-06DPBX00R		