


MATERIALS:
 PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
 FLAMMABILITY PATING UL 94V-0
 CONTACTS:PHOSPHOR BRONZE
 PLATING:TIN PLATING OVER NICKEL IN SOLDER AREA

ELECTRICAL:
 VOLTAGE: 125VAC
 CURRENT: 1.0A
 CONTACT RESISTANCE: 20mOhms Max.
 INSULATION RESISTANCE: 1000MOhms Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
 WIRING: ACCOMODATES 24 & 26 AWG.
ENVIRONMENTAL:
 OPERATING TEMPERATURE: -40°C ~ +85°C
 STORAGE TEMPERATURE: -40°C ~ +85°C

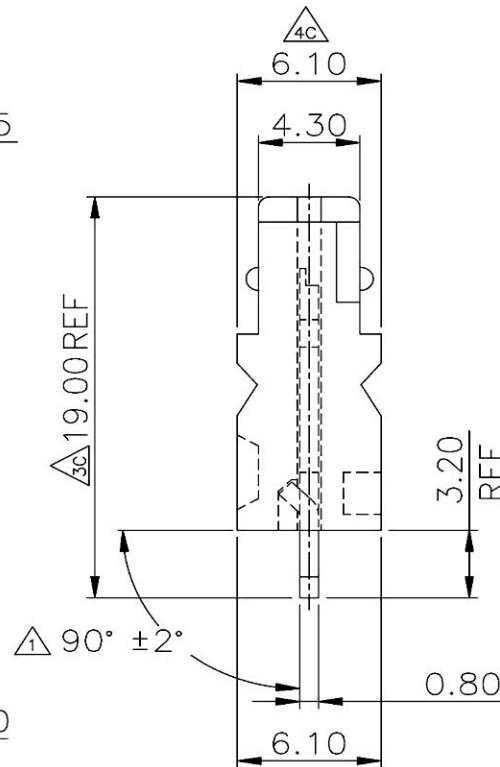

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名 3.81mm IDC BLOCK 4P FOR 110 TYPE PHOSPHOR BRANZE TIN PLATING WITHOUT PROTRUDE POST PRINT:BLUE ORANGE COLOR BEIGE INSULATOR ROHS
DWG. 製圖 Helen		0 ± 0.35 .00 ± 0.25 ANG. ± 3°	
DATE 制表日	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C0802-04APTINAR
2016/11/11	PAGE 張數 1 OF 1	REV. 版本 A	