


P.C.B. LAYOUT(REF)

- NOTES:
1. Rating: 300V 15A
PITCH: 7.62mm
 2. Insulation Withstands Voltage:
AC 2000V/MIN
 3. Insulation Resistance:
500MΩ or more at DC500V
 4. Using Temperature Range:
-40°C~+105°C
 5. Screw Torque Value: 8kg-cm
 6. Suitable Electric Wire: AWG 22~14
 7. RoHS Compliance

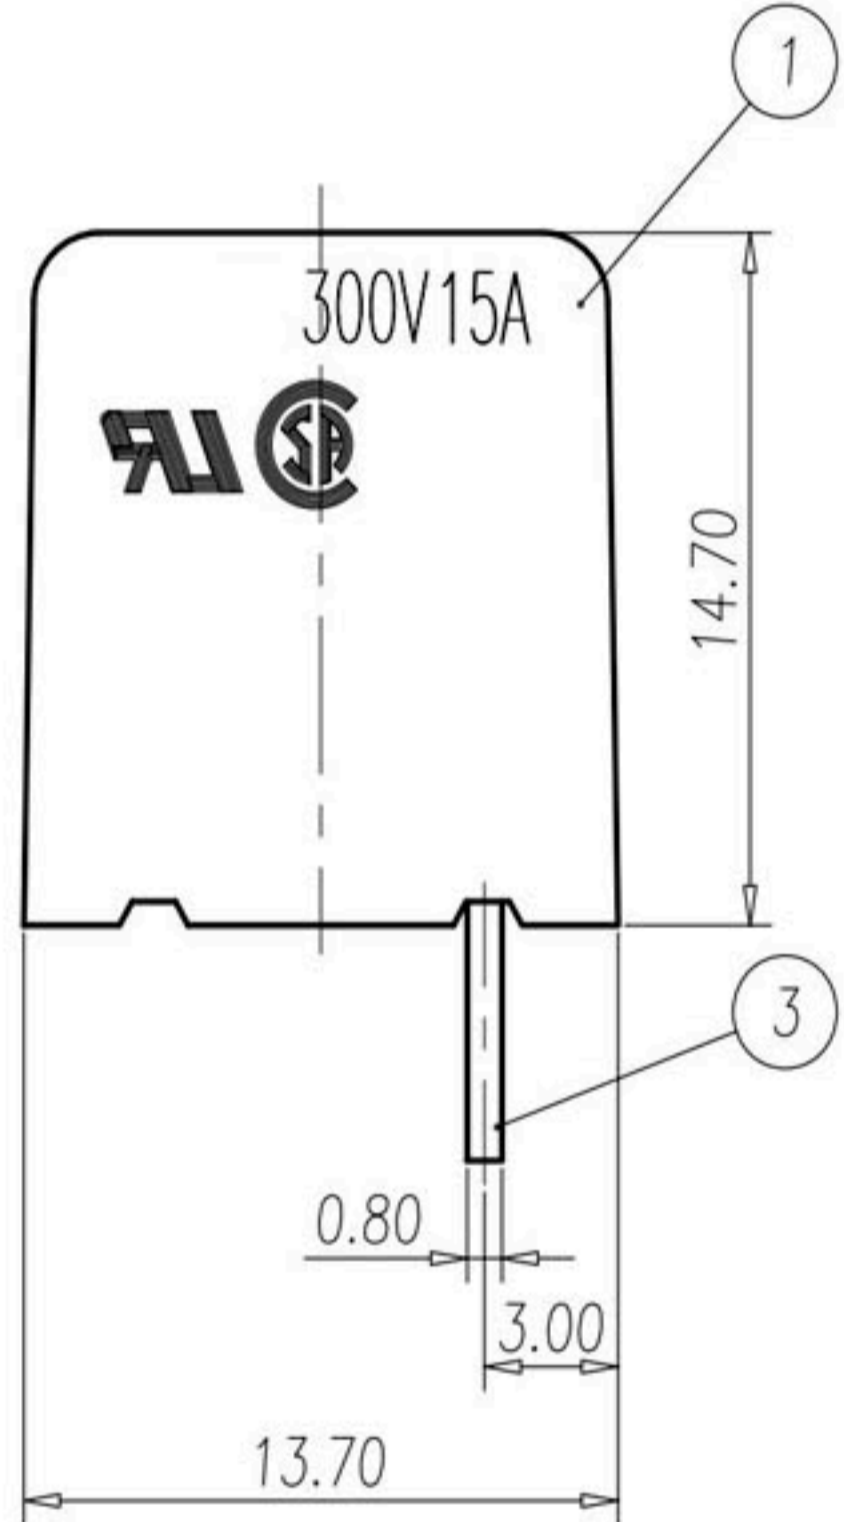

Normal Geometric Tolerancing				
—	//	≡	⊥	
0 to 100	0.2	0 to 10	0.2	
over 100 to 150	0.3	0.3	over 10	0.3
over 150	0.5			

Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0~30	±0.25
30<U<=53	±0.25	over 30~53	±0.30
53<U<=70	±0.30	over 53~70	±0.35
70<U<=90	±0.35	over 70~90	±0.44
90<U<=115	±0.44	over 90~115	±0.55
115<U<=150	±0.55	over 115~150	±0.70
150<U<=200	±0.70	over 150~200	±0.85
200<U<=250	±0.85	over 200~250	±1.00
250<U<=320	±1.00	over 250~320	±1.20

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	SCALE 比例	.0 ± .00 ± ANG. ±	7.62 SIDE PIN TERMINAL BLOCK XXP 14~22AWG TIN PLATED BLACK ROHS
DATE 制表日	UNIT 單位	SIZE 紙張尺寸	PART NO.
2012/4/3	M M	A 4	料號 C0903-XXABWTBOR
	PAGE 張數	1 OF 1	REV. 版本
			A