
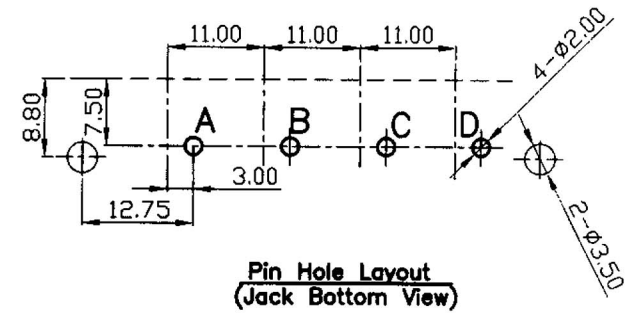
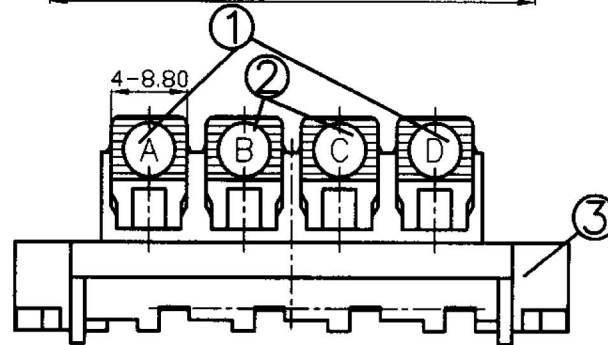
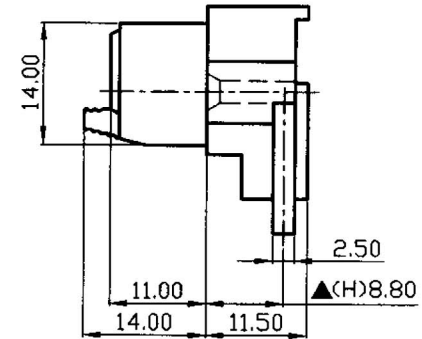


Knob Color			
(A)	(B)	(C)	(D)
RED	BLACK	BLACK	RED

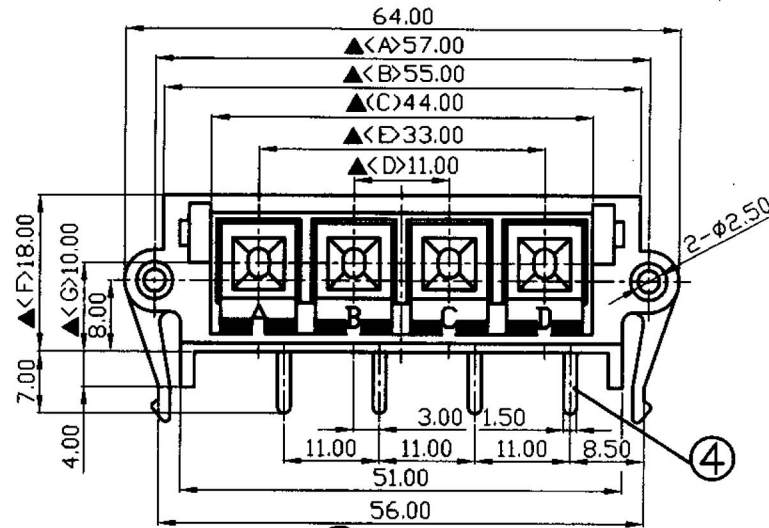

**SPECIFICATIONS:**

Contact Resistance : 30m $\Omega$  max  
 Insulation Resistance : 100M $\Omega$  min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark:  $\blacktriangle$ : The Most Important Dimension

4.	Terminal	0.3T Phosphor Bronze	4	Silver Plated
3.	Base	ABS	1	Black Color
2.	Press Button	ABS	2	Black Color
1.	Press Button	ABS	2	Red Color
NO.	Description	Material	Q'TY	Finish

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
 HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准 Betty

SCALE  
比例 参考

TOLERANCE  
容許公差  $\pm 0.3$

PART NAME 品名  
 11.0mm PUSH TERMINAL 1\*4P PUSH BLACK  
 & RED COLOR NORMAL TYPE CONTACT  
 PIN SILVER PLATED KNOB COLOR:RED/  
 BLACK/BLACK/RED ROHS LOW-LEAD

DWG.  
製圖 Jolin

UNIT  
單位 MM

SIZE.  
紙張尺寸 A 4

PART NO.  
料號 C0911-04SRV100R

DATE 制表日  
2007/03/29

PAGE  
張數 1 / 1

REV.  
版次 A