


A

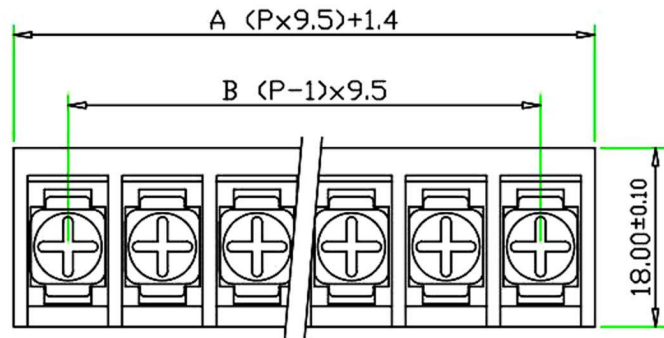

SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 10 In-Lb  
 Wire Range: 14~22 AWG  
 Rated: 15 Amperes.AC250V  
 Operation Temperature: -55°C~+95°C  
 Insulation withstands volt: AC2000V min  
 Insulation resistance: >1000MΩ or more at DC500V

B

C



D

E

F

G

H

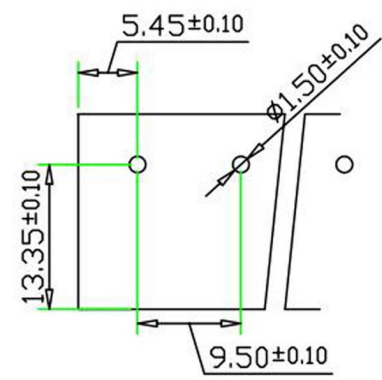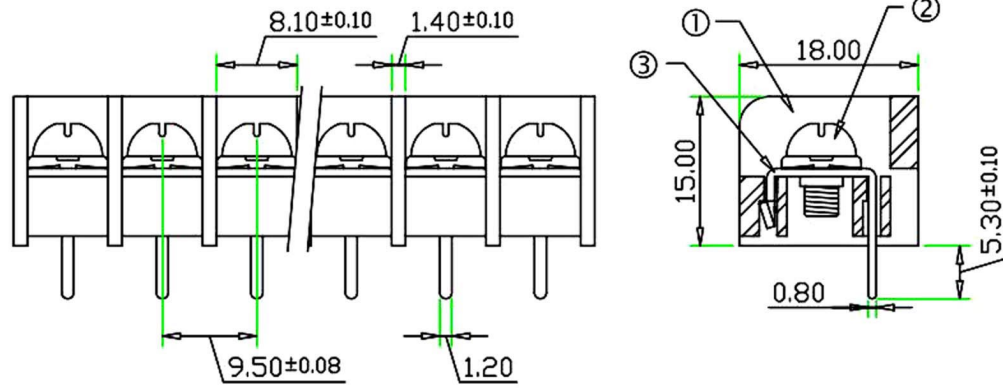

Tolerance ± 0.5

| POLE | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 15    |       |       |       |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A    | 20.4  | 29.9  | 39.4  | 48.9  | 58.4  | 67.9  | 77.4  | 86.9  | 96.4  | 105.9 | 115.4 | 124.9 | 134.4 | 143.9 |       |       |       |
| B    | 9.5   | 19    | 28.5  | 38    | 47.5  | 57    | 66.5  | 76    | 85.5  | 95    | 104.5 | 114   | 123.5 | 133   |       |       |       |
| POLE | 16    | 17    | 18    | 19    | 20    | 21    | 22    | 23    | 24    | 25    | 26    | 27    | 28    | 29    | 30    | 31    | 32    |
| A    | 153.4 | 162.9 | 172.4 | 181.9 | 191.4 | 200.9 | 210.4 | 219.9 | 229.4 | 238.9 | 248.4 | 257.9 | 267.4 | 276.9 | 286.4 | 295.9 | 305.4 |
| B    | 142.5 | 152   | 161.5 | 171   | 180.5 | 190   | 199.5 | 209   | 218.5 | 228   | 237.5 | 247   | 256.5 | 266   | 275.5 | 285   | 294.5 |

|                        |  |   |                                |
|------------------------|--|---|--------------------------------|
| RoHS Compliant         |  | <b>HSM</b> 玄茂科技股份有限公司<br>HSIUAN MAO TECHNOLOGY CO., LTD.  |                                |
| APPD. 核准<br>Betty      | SCALE 比例 参考<br>UNIT 單位 M M<br>PAGE 張數 1 OF 1 | PART NAME 品名<br>9.5mm Closed Barrier Type Terminal Block<br>H=15.0mm XXPin Side Pin Wire Range:14~22AWG<br>Tin Plating Black Color ROHS | PART NO. 料號<br>C0947-XXBWTB00R |
| DATE 制表日<br>2015/07/15 | SIZE 紙張尺寸 A 4<br>REV. 版次 A                   |   |                                |

A

B

C

D

E

F

G

H