

Dim A=N×3.81
 Dim B=(N-1)×3.81

N=1/2Number of contacts


POLES	TOL
2×2p-2×6p	+0.15/-0.15
2×7p-2×12p	+0.20/-0.20
2×13p-2×18p	+0.25/-0.25
2×19p-2×24p	+0.30/-0.30

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Insulation rating:5000MΩ (min)
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus

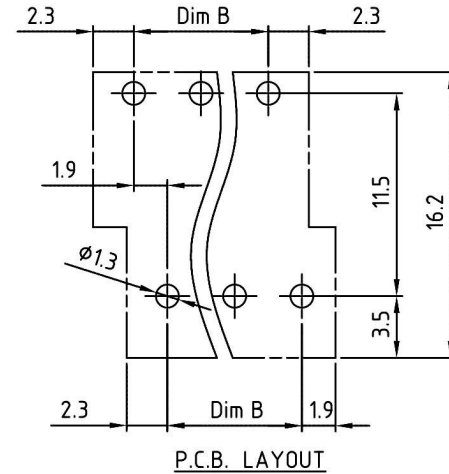

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	Tolerance	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	3.81mm TERMINAL BLOCK DOUBLE ROW PCB TYPE
DATE 制表日	PAGE 張數	REV. 版次	H:8.5mm & 16.2mm XXPin(2XXXPin) STRAIGHT TYPE
2019/01/16	1 OF 1	A	TIN PLATING SUITABLE FOR 16-24AWG
			LEFT SIDE "-" TYPE SCREW GREEN COLOR ROHS
			PART NO. C0953-XXSL3TG0R
			料號