



RECOMMENDED P.C.B LAYOUT

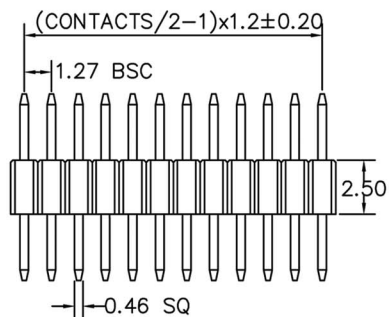

F: 7.35 mm C: 2.85 mm D: 2.00 mm

**MATERIAL**  
HOUSING : THERMOPLASTIC UL94V-0  
CONTACT : COPPER ALLOYS

**SPECIFICATION**  
CURRENT: 1A  
OPERATING TEMPERATURE: -55°C TO +105°C  
CONTACT RESISTANCE : 20 MILLIOHMS MAX  
INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
DIELECTRIC STRENGTH : 1000 VAC MIN

CONTACTS	2X26
2X2	2X27
2X3	2X28
2X4	2X29
2X5	2X30
2X6	2X31
2X7	2X32
2X8	2X33
2X9	2X34
2X10	2X35
2X11	2X36
2X12	2X37
2X13	2X38
2X14	2X39
2X15	2X40
2X16	2X41
2X17	2X42
2X18	2X43
2X19	2X44
2X20	2X45
2X21	2X46
2X22	2X47
2X23	2X48
2X24	2X49
2X25	2X50

<b>RoHS</b> Compliant	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
	<b>PART NAME 品名</b> 1.27X2.54mm PIN HEADER DUAL ROW 2XXXP STRAIGHT TYPE H=2.5mm FULL (C=2.85mm D=2.0mm ) ROHS LOW-LEAD	
APPD. 核准		<b>TOLERANCE 容許公差</b> .0=±0.38 .00=±0.25 ANG=±5°
DWG. 製圖 <b>Hedy</b>	SCALE 比例 參考	<b>SIZE.</b> 紙張尺寸 A 4
DATE 制表日 2010/10/21	UNIT 單位 M M	<b>REV.</b> 版次 A
PAGE 張數 1 / 1	<b>PART NO.</b> 料號 <b>C1270-XXBSXAS0R</b>	