


Dim.D	NOTE
4.00	03PIN
5.00	04~50PIN

Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

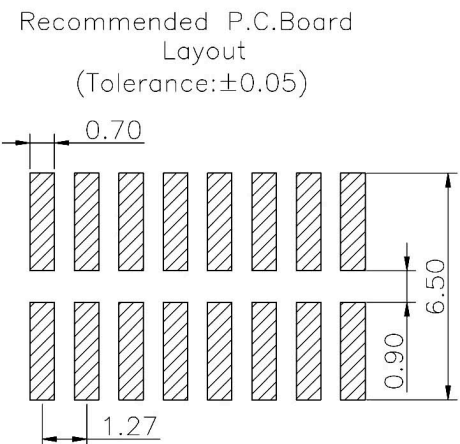

RoHS Compliant **HSM** 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	 SCALE 比例 参考 UNIT 單位 MM PAGE 張數 1 OF 1	GENERAL TOLERANCE	PART NAME 品名								
DWG. 製圖		<table border="1"> <tr><td>X:±5.0°</td><td>x:±0.30</td></tr> <tr><td>Y:±3.0°</td><td>.X:±0.25</td></tr> <tr><td>.XX:±2.0°</td><td>.XX:±0.15</td></tr> <tr><td>.XXX:±1.0°</td><td>.XXX:±0.10</td></tr> </table>	X:±5.0°	x:±0.30	Y:±3.0°	.X:±0.25	.XX:±2.0°	.XX:±0.15	.XXX:±1.0°	.XXX:±0.10	1.27MM X 1.27MM DUAL ROW SINGLE INSULATOR PIN HEADER H:1.7mm 2XXXP SMT TYPE (C=3.0MM D=5.5MM E=2.2MM) WITH PAD ROHS
X:±5.0°		x:±0.30									
Y:±3.0°		.X:±0.25									
.XX:±2.0°	.XX:±0.15										
.XXX:±1.0°	.XXX:±0.10										
DATE 制表日	SIZE 紙張尺寸 A 4	PART NO.									
2021/07/16	REV. 版次 C	料號 C1271-XXBDXCAXR									
Betty											