



Dim.C	NOTE
5mm	02~08pins
8.50mm	09~50pins

Specifications  
 Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials  
 ▲ Contact Material: Phosphor Bronze  
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

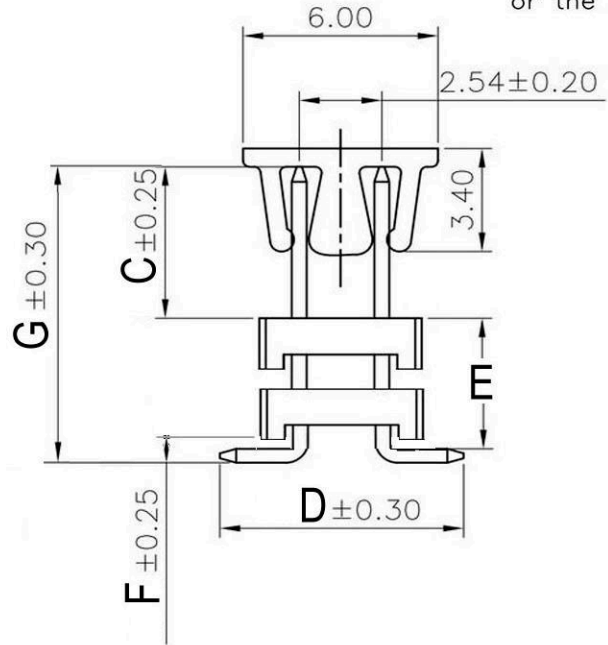

C=3.0mm D=5.5mm E=4.73mm F=1.27mm G=9.0mm

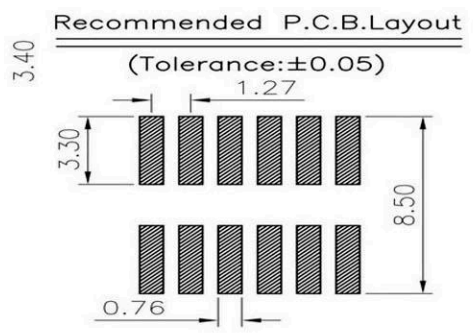

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 DATE 制表日 2015/4/30	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.25 .00 ± 0.15 ANG. ± SIZE 紙張尺寸 A4 REV. 版本 A	PART NAME 品名 1.27X1.27mm DUAL ROW DUAL DUAL INSULATOR PIN HEADER H:1.7mm 2XXXP SMT TYPE GOLD PLATING C=3 D=5.5 E=4.73 F=1.27 G=9.0 ROHS PART NO. 料號 C1271-XXFDGDAXR