



RECOMMENDED P.C.B LAYOUT

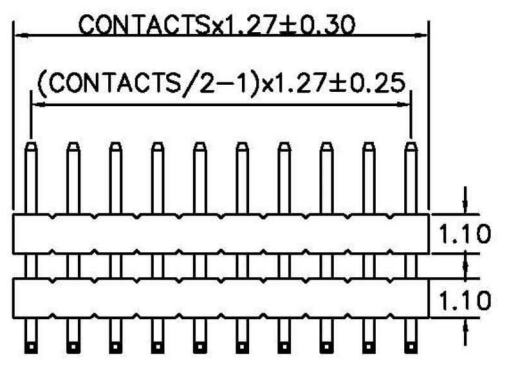

C=4.9mm D=5.5mm E=8.0mm  
F=0.5mm G=13.4mm

CONTACTS	2X26
2X2	2X27
2X3	2X28
2X4	2X29
2X5	2X30
2X6	2X31
2X7	2X32
2X8	2X33
2X9	2X34
2X10	2X35
2X11	2X36
2X12	2X37
2X13	2X38
2X14	2X39
2X15	2X40
2X16	2X41
2X17	2X42
2X18	2X43
2X19	2X44
2X20	2X45
2X21	2X46
2X22	2X47
2X23	2X48
2X24	2X49
2X25	2X50

**MATERIAL**  
HOUSING : THERMOPLASTIC UL94V-0  
CONTACT : COPPER ALLOYS

**SPECIFICATION**  
CURRENT: 1A  
OPERATING TEMPERATURE: -55°C TO +105°C  
CONTACT RESISTANCE : 30 MILLIOHMS MAX  
INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
DIELECTRIC STRENGTH : 600 VAC MIN  
DURABILITY : 50 CYCLES  
RETENTION FORCE : 454g MIN

**FINISH**  
CONTACT PLATING SEE ORDER INFORMATION

<p>RoHS Compliant</p>		<p><b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE 容許公差 0=±0.38 .00=±0.25 ANG=±5°</p>	<p>PART NAME 品名 1.27 X 1.27mm PIN HEADER DUAL ROWS DUAL INSULATORS 2XXXP SMT TYPE H:1.1mm FULL GOLD PLATING (C=4.9mm D=5.5mm E=8.0mm F=0.5mm) ROHS</p>
<p>DWG. 製圖</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 M M</p>	<p>PART NO. 料號 C1281-XXFDGAD0R</p>
<p>DATE 製表日 2015/04/22</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 A</p>	