


1 2 3 4 5 6 7 8

A

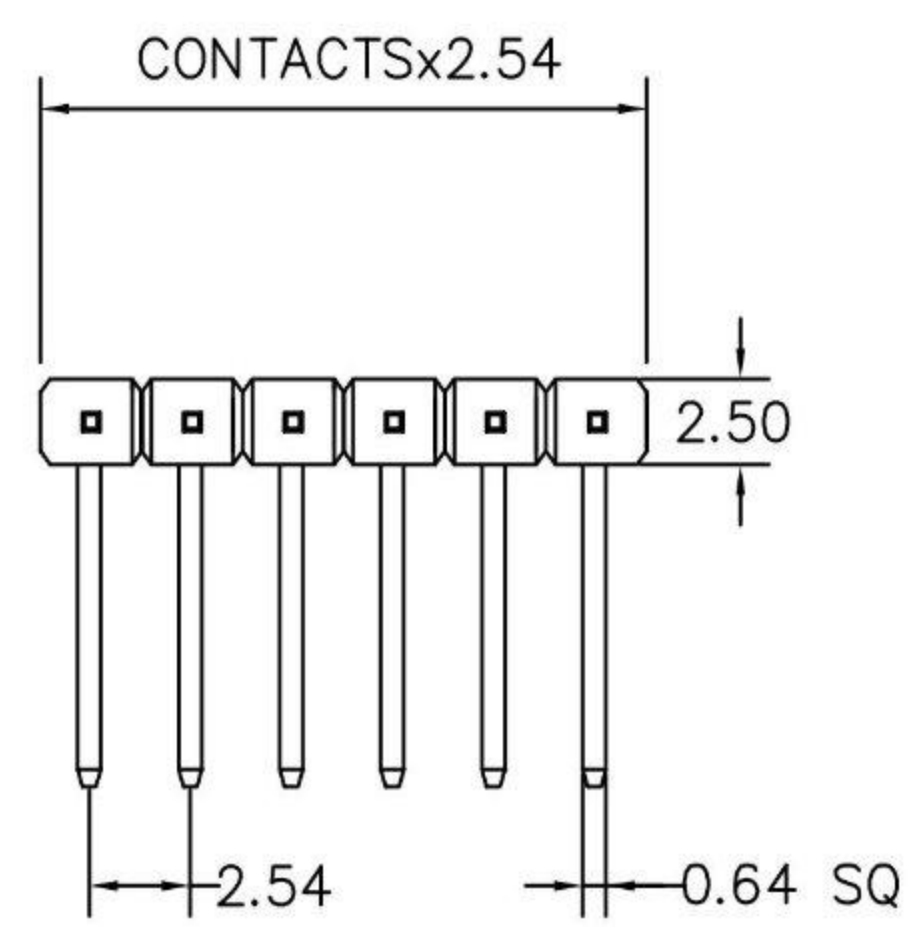




B

C

D

E

F

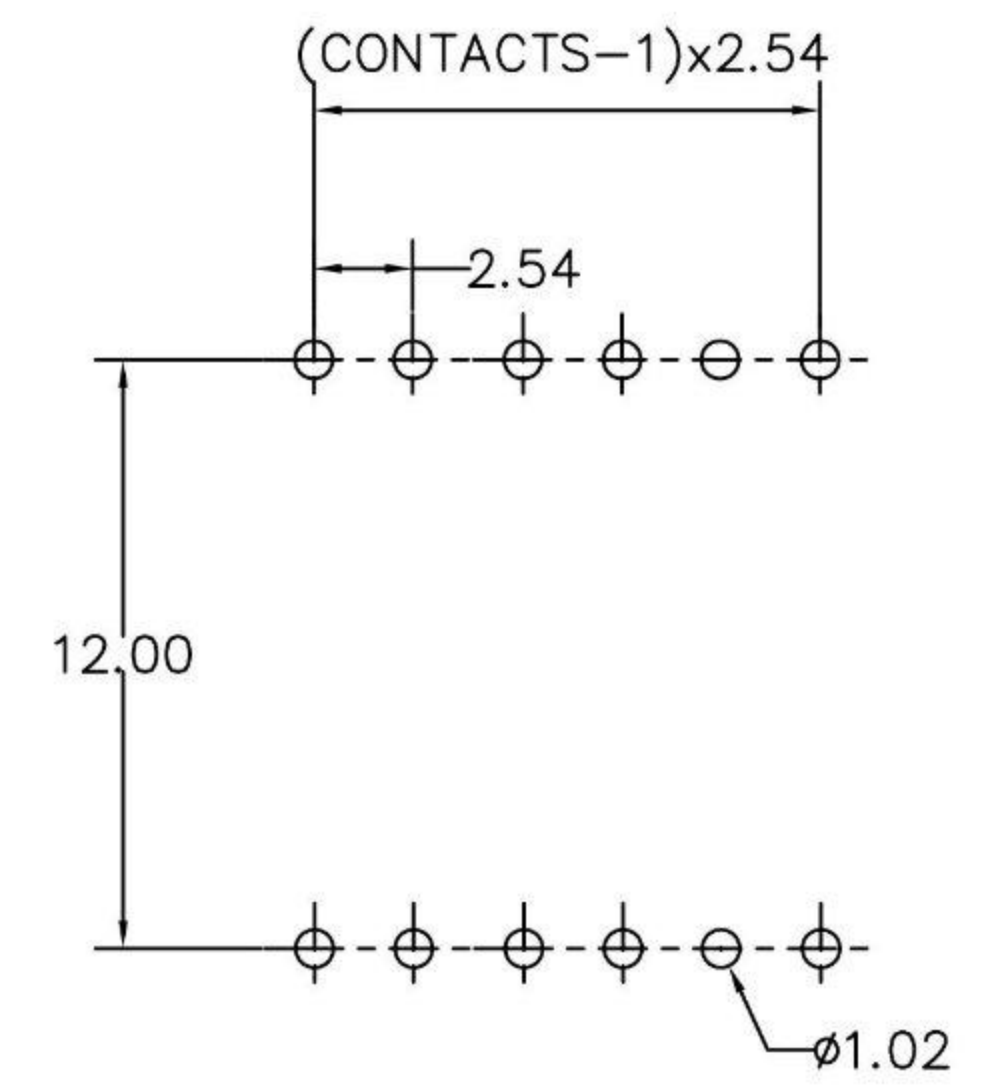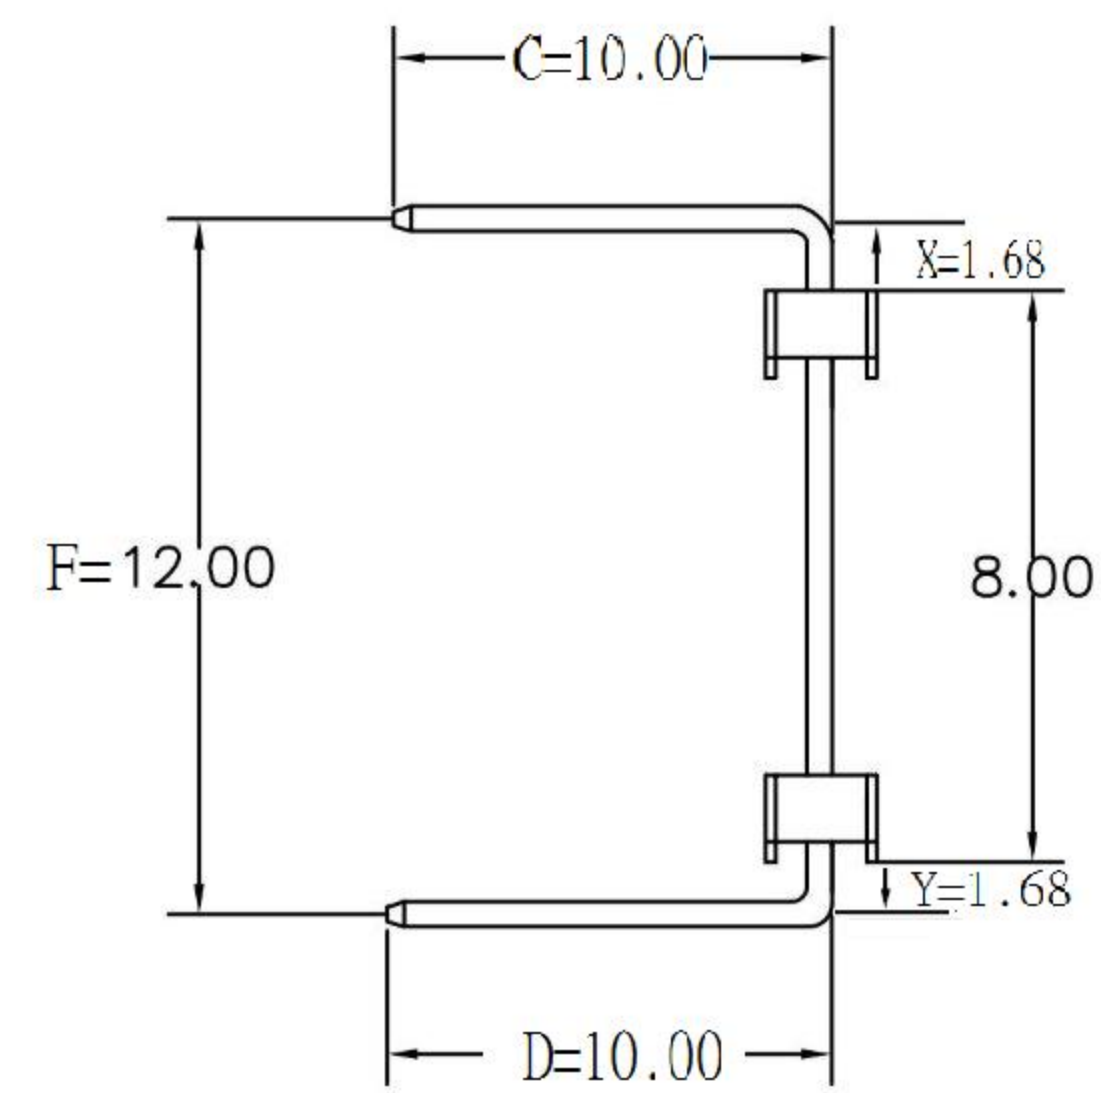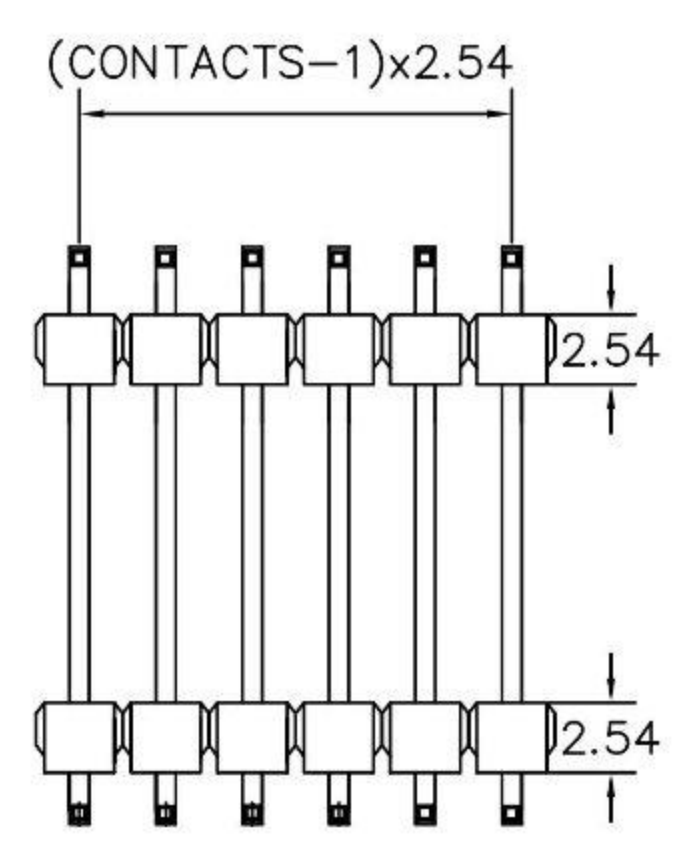

RECOMMENDED P.C.B LAYOUT

A

B

C

D

E

F

**MATERIAL**  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 HELEN DATE 制表日 2010/8/10	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE .0=±0.38 .00=±0.25 ANG=±5° SIZE 紙張尺寸 A4 REV. 版本 A	PART NAME 品名 2.54x12mm □ TYPE PIN HEADER SINGLE ROW DUAL INSULATOR GOLD FLASH 1XxxP (C=10 D=10 E=8 F=12 X=1.68 Y=1.68mm) ROHS LOW-LEAD PART NO. 料號 C2101-XXEGVA00R

G

H

1 2 3 4 5 6 7 8