
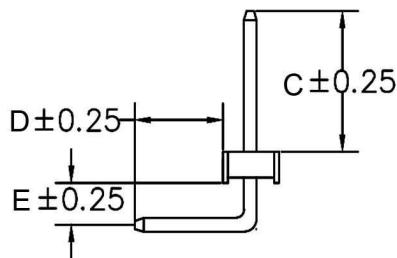


RECOMMENDED P.C.B LAYOUT

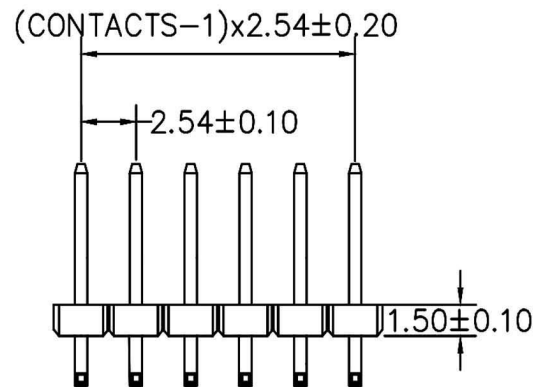

C=6.1mm D=3.3mm E=1.7mm

CONTACTS	1X21
1X2	1X22
1X3	1X23
1X4	1X24
1X5	1X25
1X6	1X26
1X7	1X27
1X8	1X28
1X9	1X29
1X10	1X30
1X11	1X31
1X12	1X32
1X13	1X33
1X14	1X34
1X15	1X35
1X16	1X36
1X17	1X37
1X18	1X38
1X19	1X39
1X20	1X40

MATERIAL
 HOUSING : NYLON 6T,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant	玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
	APPD. 核准 Betty	 SCALE 比例 参考	TOLERANCE 容許公差 0=±0.38 .00=±0.25 ANG=±5°
DWG. 製圖 Betty	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NAME 品名 2.54mm Pin Header Single Row Right Angle Type H=1.5mm 1XXXP Gold Flash Plating (C=6.1mm D=3.3mm E=1.7mm) ROHS
DATE 制表日 2013/06/06	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C2102-XXARGDA0R