
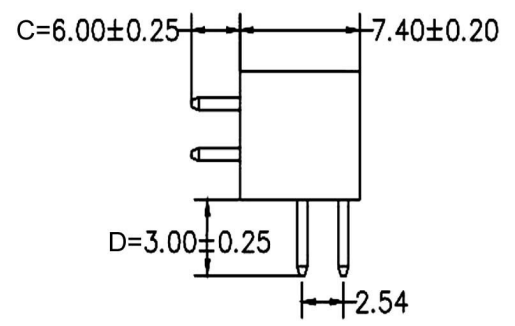
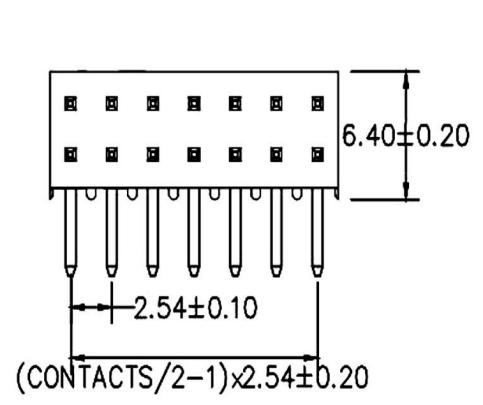
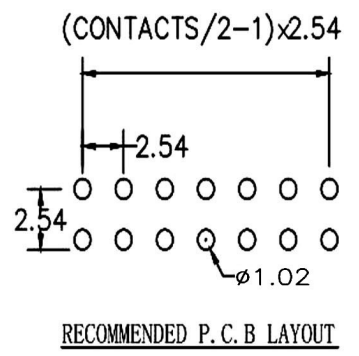


**MATERIAL**  
 HOUSING : THERMOPLASTIC UL94V-0 (PBT)  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 1000V RMS

CONTACTS	
2X21	
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

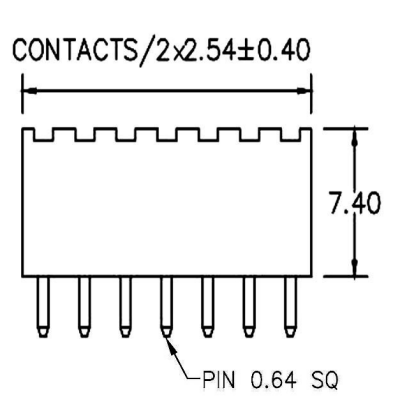

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty	SCALE 比例 参考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE .0±0.38 .00±0.25 ANG=±5°	PART NAME 品名 2.54mm PIN HEADER DUAL ROWS RIGHT ANGLE TYPE H=7.4mm 2XXXP GOLD FLASH PLATING (C=6.0mm D=3.0mm E=0mm) ROHS INSULATOR MATERIAL:PBT
DWG. 製圖 Abby		SIZE 紙張尺寸 A 4	
DATE 制表日 2016/12/02	REV. 版次 B	PART NO. 料號 C2274-XXBRXR0R	