



Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material:Thermoplastic, UL 94V-0  
 PBT or the equivalent material

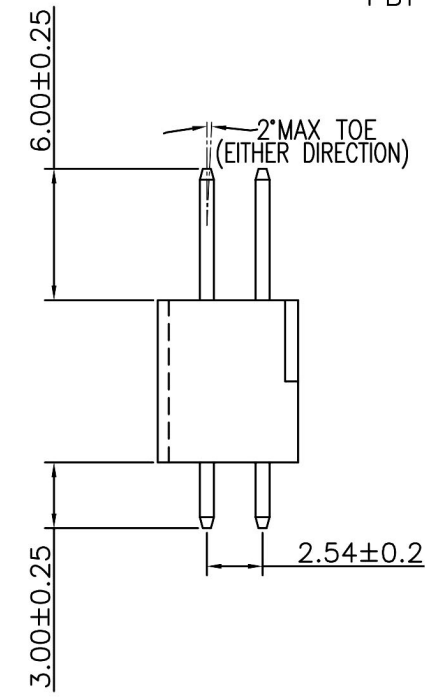

Recommended P.C.Board  
 Layout  
 (Tolerance:±0.05)



RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	GENERAL TOLERANCE X:±5.0° X:±0.30 .X:±3.0° .X:±0.25 .XX:±2.0° .XX:±0.15 .XXX:±1.0° .XXX:±0.10	PART NAME 品名 2.54mm PIN HEADER DUAL ROWS H=7.4mm 2X13P (C=6.0 D=3.0mm) ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2274-XXBSXAS0R
DATE 制表日 2017/03/07	PAGE 張數 1 OF 1	REV. 版次 A	