



1 2 3 4 5 6 7 8

A

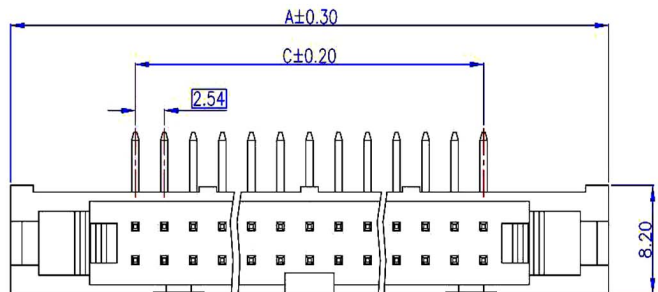

B

C

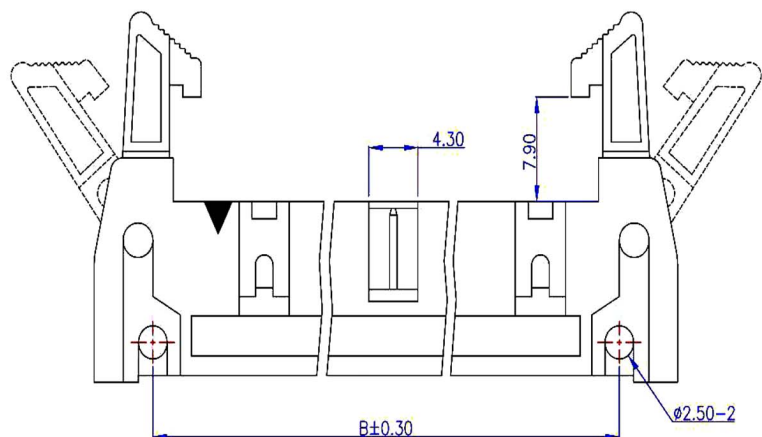


D

E

F

G

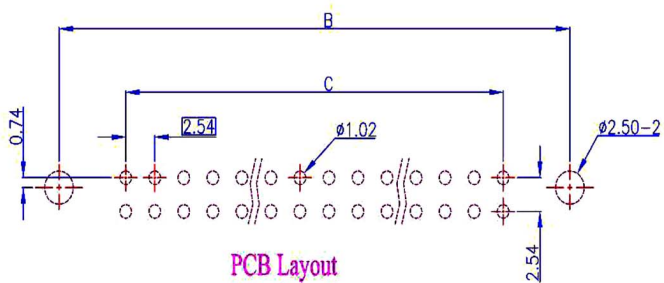

PCB Layout
(Top View)

H

1 2 3 4 5 6 7 8

Material and Finish


- 1. Housing: PBT (UL94V-0), Black.
- 2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.

Electrical Characteristics

- 1. Current Rating: 3.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

- 1. Operating Temperature: -55°C ~ +105°C

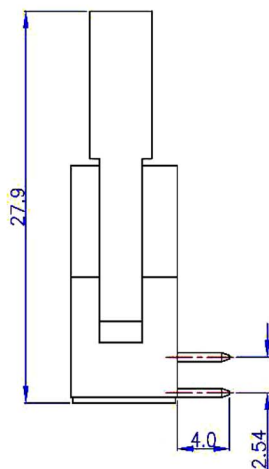

Dimensions			
Pos.	A	B	C
10	32.00	21.84	10.16
12	34.54	24.38	12.70
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
24	49.78	39.62	27.94
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Betty
DWG. 製圖 Betty
DATE 制表日 2012/11/01

SCALE 比例 參考
UNIT 單位 MM
PAGE 張數 1 OF 1

TOLERANCE 容許公差
.0 ± 0.30
.00 ± 0.20
ANG. ± 3°
SIZE. 紙張尺寸 A 4
REV. 版次 A

PART NAME 品名
FULLY SHROUDED HEADER ASSEMBLY
2.54mm X 2.54mm XXP LONG LOCK
RIGHT ANGLE TYPE GOLD FLASH PLATING
BLACK COLOR ROHS

PART NO. 料號 C3000-XXRLGB00R

A

B

C

D

E

F

G

H