


Dimensions			
Pos.	A	B	C
10	32.00	27.94	10.16
12	34.54	30.48	12.70
14	37.08	33.02	15.24
16	39.62	35.56	17.78
20	44.70	40.64	22.86
24	49.78	45.72	27.94
26	52.32	48.26	30.48
30	57.40	53.34	35.56
34	62.48	58.42	40.64
40	70.10	66.04	48.26
50	82.80	78.74	60.96

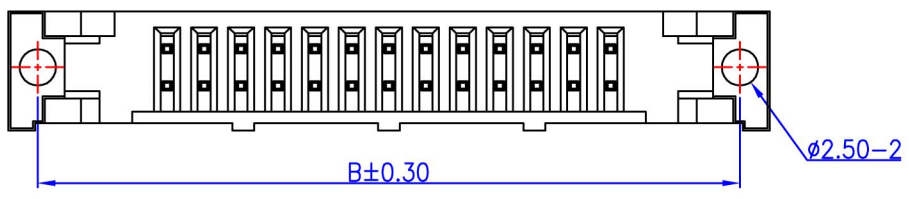

**RoHS Compliant** **HSM** 玄茂科技股份有限公司 **HSUAN MAO TECHNOLOGY CO., LTD.**

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating. Order Information PBT	1. Current Rating: 3.0 Amp. Max.. 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.	1. Operating Temperature: -55°C ~ +105°C

APPD. 核准	TOLERANCE 容許公差 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	PART NAME 品名 FULLY SHROUDED HEADER ASSEMBLY 2.54mm X 2.54mm XXP NON LOCK 180° GOLD PLATING BLACK COLOR ROHS
DWG. 製圖 Hedy		
DATE 制表日 2012/11/21	UNIT 單位 MM	PART NO. 料號 C3000-XXSNGB00R
PAGE 張數 1 / 1	REV. 版次 A	