
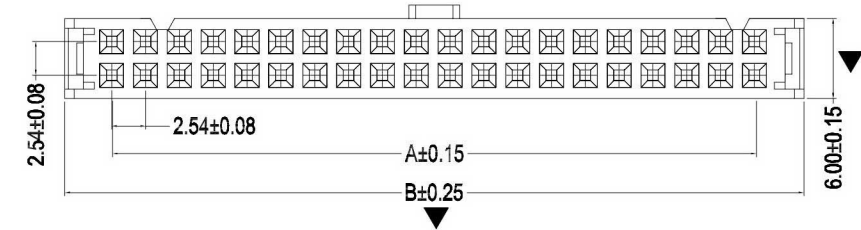

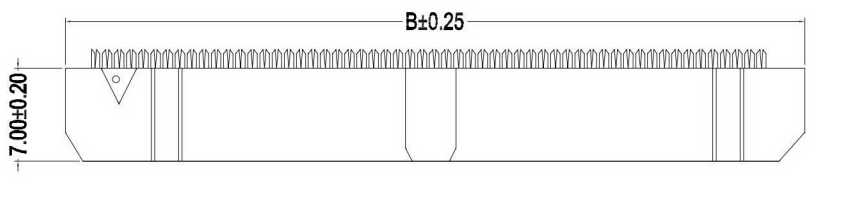

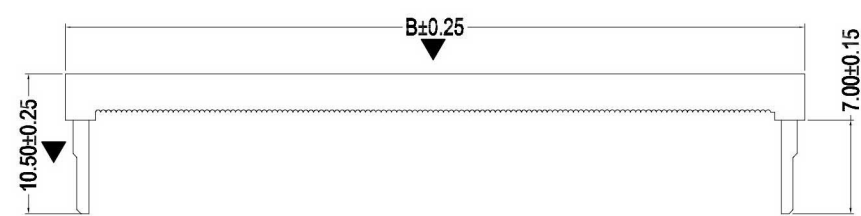
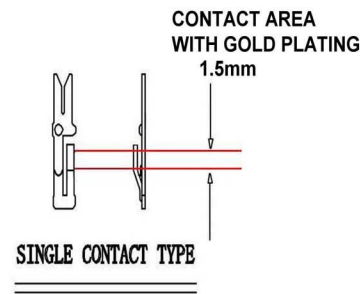



↓ OPTION: WITH SR OR WITHOUT SR"

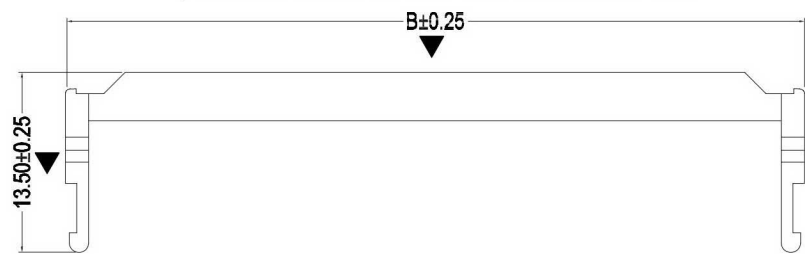

- NOTES :
- MATERIAL:
 - Insulator: PBT Glass Fiber(UL94V-0)
 - Contact: Brass T=0.20mm
 - FINISH:
 - Contact: Gold-Plated Over Nickel.
 - SPECIFICATION
 - Current Rating :1A AC,DC
 - Voltage Rating : 250V AC,DC ;
 - Contact Resistance:20mΩ Min ;
 - Insulation Resistance:1000MΩ Min
 - Withstanding Voltage:500V AC/Min
 - Temperature Range:-40°C To +85°C

Contact No.	Dim. A	Dim. B
6P	5.08	12.32
8P	7.62	14.86
10P	10.16	17.40
12P	12.7	19.94
14P	15.24	22.48
16P	17.78	25.02
18P	20.32	27.56
20P	22.86	30.10
24P	27.94	35.18
26P	30.48	37.72
28P	33.02	40.26
30P	35.56	42.80
34P	40.64	47.88
40P	48.26	55.5
50P	60.96	68.20
60P	73.66	80.90
64P	78.74	85.98

C 3001 — 10 Y Y S B 0 0 R

- | | | |
|---------------------------------------|---|--------------------|
| 1. PRODUCTS:
C:Connector | 5. BODY OPTION:
Y:W/ Bump | 8. FILL IT WITH"0" |
| 2. SERIES NO.:
3001 | 6. CONTACT PLATING:
S:Selective Gold | 9. FILL IT WITH"0" |
| 3. CONTACT NO.:
06-64 | 7. INSULATOR COLOR:
B:Black | 10. R:ROHS |
| 4. FUNCTION:
Y:W/ S/R
N:W/O S/R | | |

RoHS Compliant

HSM 玄茂科技股份有限公司
Hsuan Mao Technology Co., LTD.

APPD.		TOLERANCE .0 ± 0.2 .00 ± 0.1 ANG. ± 2°	PART NAME 品名 IDC SOCKET 2.54mm X 2.54mm XXP WITH BUMP ROHS
DWG. Helen	SCALE 参考	UNIT mm	PART NO. 料號 C3001-XXXYXX00R
DATE 2016/6/28	PAGE 1 OF 1	SIZE. A 4	REV. A