


POSITION	A	B	C
6P	10.82	5.08	11.52
8P	13.36	7.62	14.06
10P	15.90	10.16	16.60
12P	18.44	12.70	19.14
14P	20.98	15.24	21.68
16P	23.52	17.78	24.22
18P	26.06	20.32	26.76
20P	28.60	22.86	29.30
24P	33.68	27.94	34.38
26P	36.22	30.48	36.92
30P	41.30	35.56	42.00
34P	46.38	40.64	47.08
36P	48.92	43.18	49.62
40P	54.00	48.26	54.70
50P	66.70	60.96	67.40
60P	79.40	73.66	80.10
64P	84.48	78.74	85.18

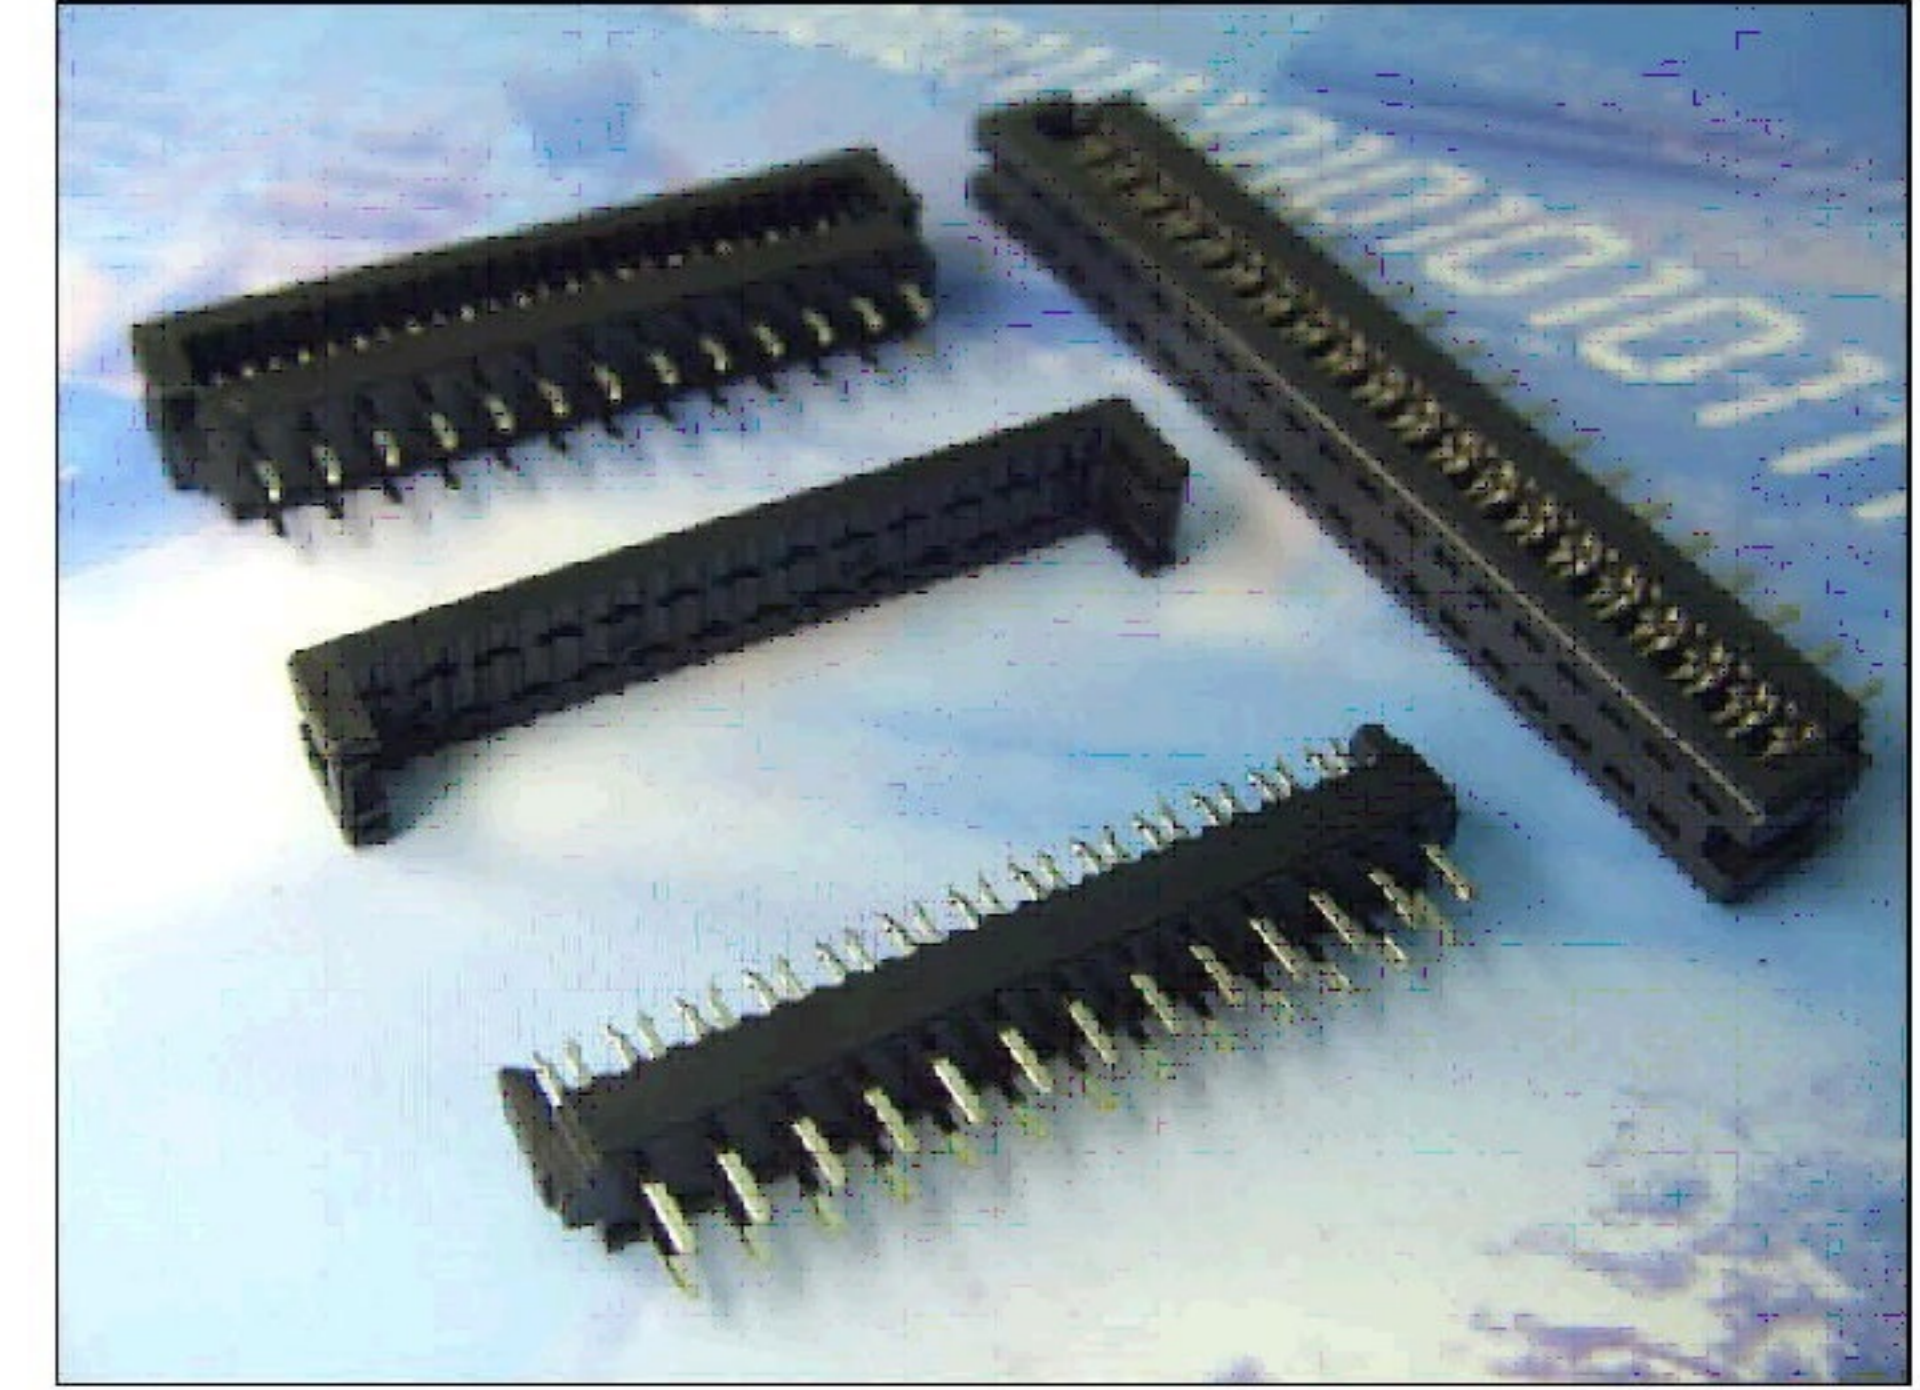

**SPECIFICATIONS**

- Material**  
 Insulator : PBT glass reinforced, rated UL 94V-0  
 Contact : Brass
- Electrical**  
 Current Rating : 1Amp  
 Contact Resistance : 30 m ohms max.  
 Insulation Resistance : 3000 M ohms min.  
 Dielectric Withstanding Voltage : 500V AC for 1minute  
 Operating Temperature : -40° ~ +105°
- Flat ribbon cable with 1.27mm pitch.

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 ABBY	SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.35 .00 ±0.25 ANG. ±3	PART NAME 品名 DIP PLUG 2.54mm X 2.54mm XXP H: 6.0mm W/KINK ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C3100-XXBAXX00R
DATE 制表日 2020/7/30	PAGE 張數 1 OF 1	REV. 版次 A	