


**MATERIALS:**  
 INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0  
 COLOR: BLACK OR GREY (OPTION)  
 CONTACT MATERIAL: BRASS. PLATING (OPTION)

**ELECTRICAL:**  
 CURRENT RATING: 1 AMP DC  
 INSULATION RESISTANCE: 5000 MΩ MIN.  
 CONTACT RESISTANCE: 30 mΩ MAX.  
 DIELECTRIC WITHSTANDING: 1000 V AC  
 OPERATING TEMPERATURE: -40°C ~ +105°C  
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

⑤: See Table-1

CONTACTS	A	B
24P	35.88	27.94
28P	40.96	33.02
32P	46.04	38.10
36P	51.12	43.18
40P	56.20	48.26

**Recommended P.C. Board Hole Layout**

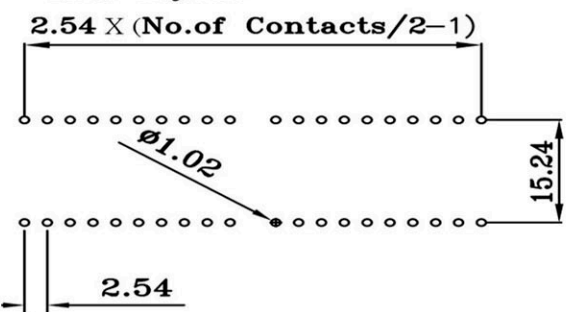

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 DATE 制表日 2020/10/6	Helen	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3° UNIT 單位 M M PAGE 張數 1 OF 1 REV. 版本 B	PART NAME 品名 DIP PLUG 2.54mm X 15.24mm XXP ROHS PART NO. 料號 C3300-XXXX0000R