



1 2 3 4 5 6 7 8

A

A

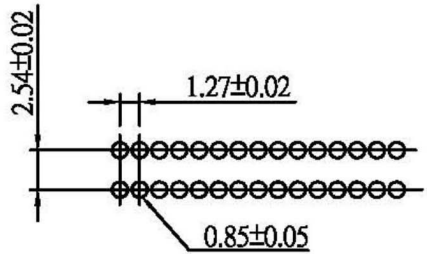

P.C.Board Layout

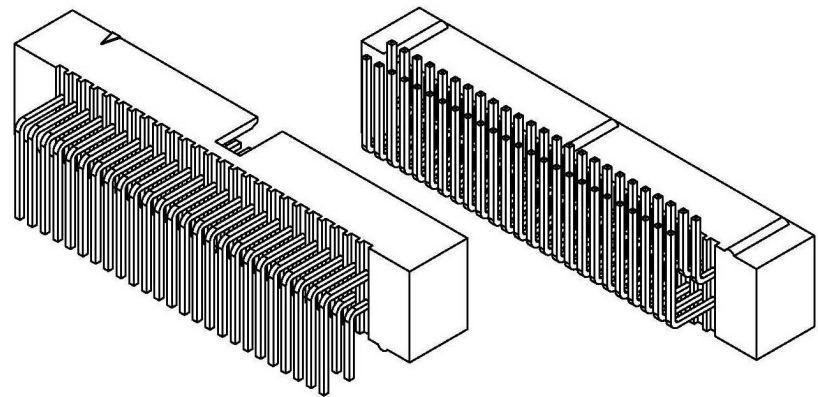

Contact:

Contact:Brass.

Insulator:Nylon 6T.

Finish:Gold flash plated over nickel.

Circuits	Dimension	
	A	B
08	3.81	13.10
10	5.08	14.37
16	8.89	18.18
20	11.43	20.72
26	15.24	24.53
30	17.78	27.07
34	20.32	29.61
40	24.13	33.42
44	26.67	35.96
50	30.48	39.77
60	36.83	46.12
68	41.91	51.20
80	49.53	58.82
100	62.23	71.52

B

B

C

C

D


D

E

E

F

F

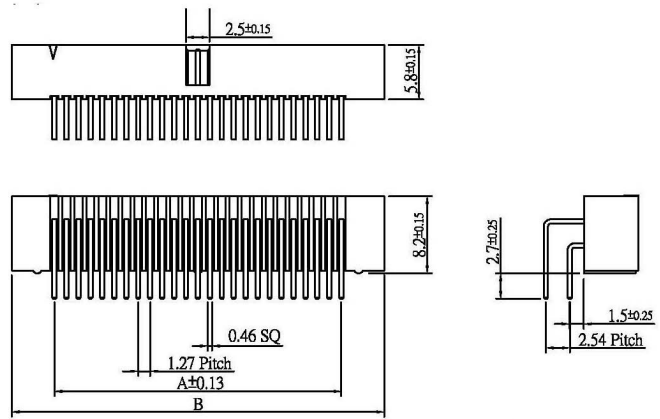

G

G

Specification:

Current Rating :1A Max

Operating Temp : -40°C~+105°C

Insulation Resistance:1000MΩ Min

H

H

Dielectric Withstanding Voltage :500V AC For 1Min

Contact Resistance:20mΩ Max

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Hedy	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±
DWG. 製圖 Yumi	UNIT 單位 M M	SIZE. 紙張尺寸 A 4
DATE 制表日 2017/10/23	PAGE 張數 1 OF 1	REV. 版次 B
PART NAME 品名 BOX HEADER 1.27mm X 2.54mm 10P 90° COLOR ROHS		PART NO. 料號 C3503-XXRGB000R

1 2 3 4 5 6 7 8