

FEATURE:

INSULATOR

Glass-Filled PBT is 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating over nickel

SPECIFICATION:

Current Rating : 3 amperes

Contact Resistance : 20 miniohms max.

Operation Temperature : -55°C to +105°C

Voltage Rating : 800 VAC 1 minute

Insulation Resistance : 5000 megaohms min.

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair


CONTACT NO	DIM A	DIM B	DIM C	DIM D	DIM E
12/24	51.69	45.09	37.38	33.22	27.94
22/44	77.09	70.49	62.78	58.62	53.34
24/48	82.17	75.57	67.86	63.70	58.42
25/50	84.71	78.11	70.40	66.24	60.96
28/56	92.33	85.73	78.02	73.86	68.58
30/60	97.41	90.81	83.10	78.94	73.66
35/70	110.11	103.51	95.80	91.64	86.36
36/72	112.65	106.05	98.34	94.18	88.90
43/86	130.43	123.83	116.12	111.96	106.68
44/88	133.17	126.57	118.66	114.50	109.22
50/100	148.21	141.61	133.90	129.74	124.46

SOLDER LENGTH	L	ROW TO ROW	S
A	3.50mm	A	5.08mm
B	6.00mm	B	3.81mm
C	10.80mm	C	3.00mm
		D	2.54mm

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0 ±0.38 .00 ±0.25 ANG. ±	PART NAME 品名 2.54mm SLOT 90° XXP WITH EAR W/O KINK SELECTIVE GOLD BLACK INSULATOR PHOSPHOR BRONZE ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	
DATE 制表日 2011/07/18	PAGE 張數 1 OF 2	REV. 版本 A	PART NO. 料號 C3601-XXNXXSB0R

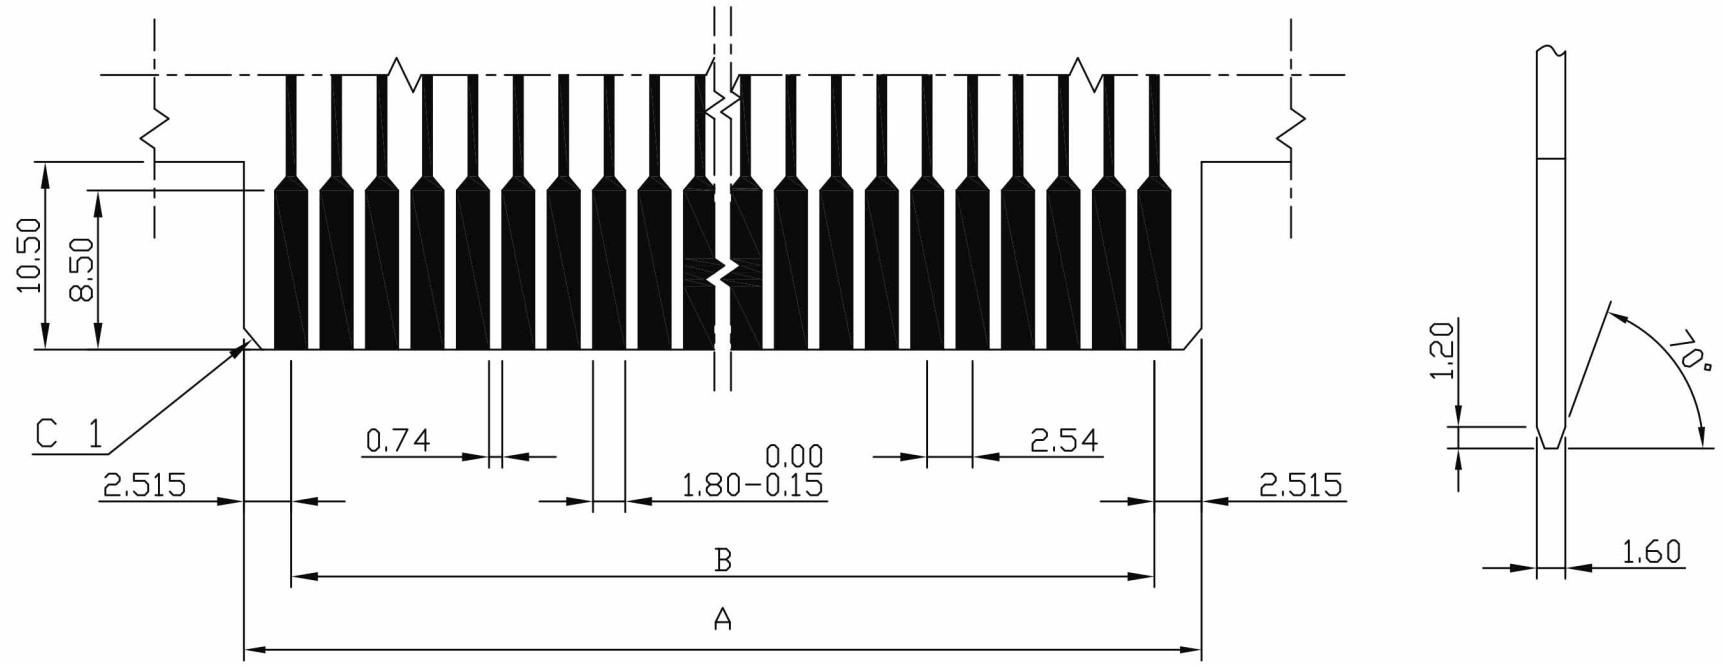

CONTACTS NO.	DIM A	DIM B
12/24	32.97	27.94
22/44	58.37	53.34
24/48	63.45	58.42
25/50	65.99	60.96
28/56	73.61	68.58
30/60	78.69	73.66
35/70	91.39	86.36
36/72	93.93	88.90
43/86	111.71	106.68
44/88	114.25	109.22
50/100	129.49	124.46

APPD. 核准 DWG. 製圖 DATE 制表日 2014/05/16		Betty	RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 EDGE CARD CONN.(金手指)
SCALE 比例 參考	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PAGE 張數 2 OF 2	REV. 版次 A	PART NO. 料號 C3601-XXNXXSB0R	