



1 2 3 4 5 6 7 8




A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

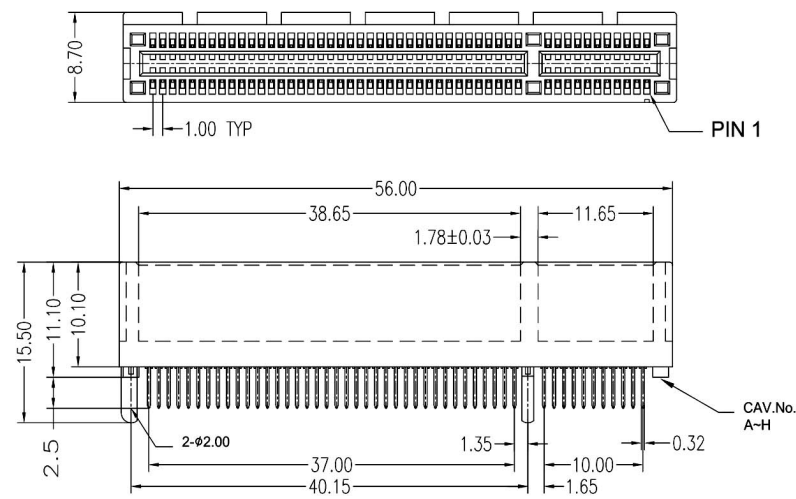

NOTES:

1. Material:
 - Body: Nylon 46+30%G.F., UL 94V-0 Rated.
 - Color: White or Black.
 - Contact: Brass.
 - Plating: Gold Plating over Nickel on Contact Area.
 - Tin Plating on Solder Tail.
2. Mechanical:
 - Insertion Force: 1.15N Max per Contact Pair.
 - Withdrawal Force: 0.15N Min per Contact Pair.
 - Contact Retention Force: 4.9N Min per Contact.
3. Electrical Specification:
 - Current Rating: 1.1 Ampere.
 - Contact Resistance: 30mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 500 VAC.
4. Environmental:
 - Operating Temperature: -55°C to +105°C

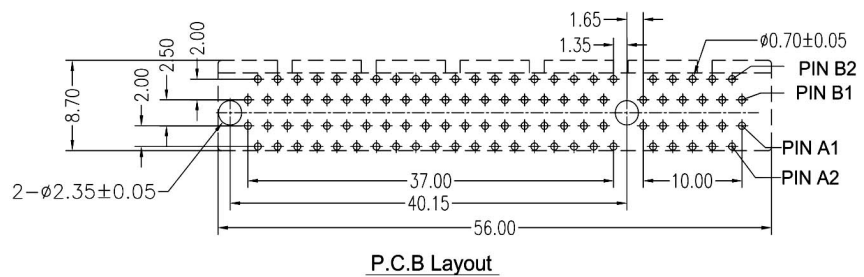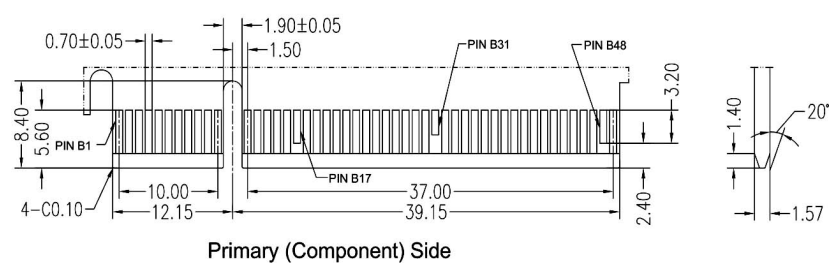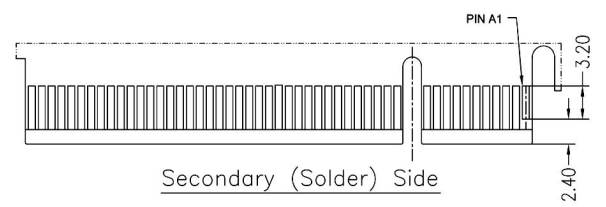

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS ANGLES X ± .35 ± 3° XX ± .25 XXX ± .20	PART NAME 品名
DWG. 製圖 Betty			1.0mm PCI EXPRESS DIP TYPE(180°) 98P PLASTIC POSTS BODY MATERIAL: NYLON 46 CONTACT MATERIAL: BRASS SELECTIVE GOLD PLATING BLACK COLOR PIN LENGTH: 2.5mm ROHS
DATE 制表日	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO.
2018/03/16	PAGE 張數 1 OF 1	REV. 版次 A	料號 C3613-98PNBS2BL

1 2 3 4 5 6 7 8