


1 2 3 4 5 6 7 8

A

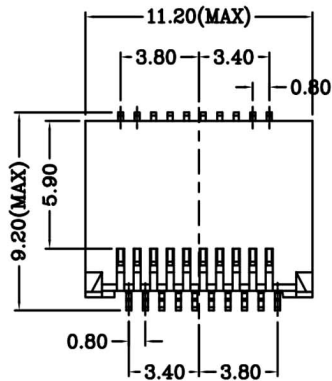

B

C


D

E

F

G

H



Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:





Current Rating: 0.5 A.

Dielectric Withstanding Voltage: 300V For 1 minute.

Insulation Resistance: 500MΩ min.



Contact Resistance: 35mΩ max.

Operating Temperature: -55°C~+85°C.

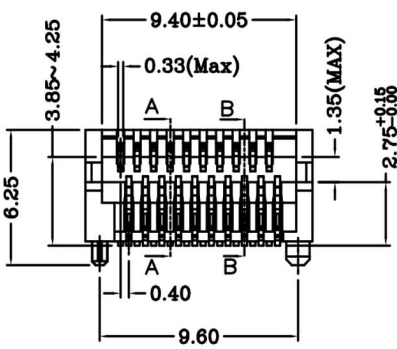

SECTION A-A

SECTION B-B

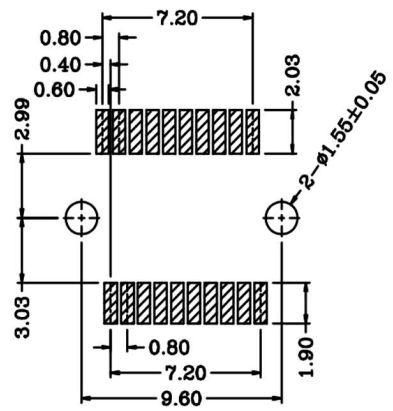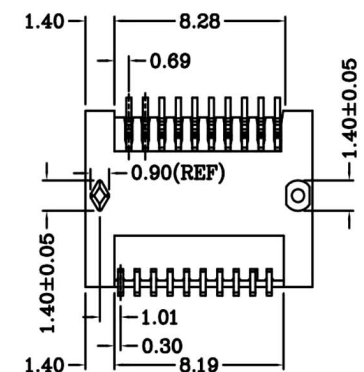

P.C.Board Layout

(Tolerance=±0.05 TOP VIEW)

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE x = ±0.5 .x = ±0.25 .xx = ±0.15</p>	<p>PART NAME 品名 0.8mm SFP CONNECTOR SMT 90° 2X10P MATERIAL:LCP W/ PLASTIC POST(DIP L=1.10mm) CONTACT AREA:GOLD 30U",SOLDER AREA:MATTE TIN BLACK COLOR REEL PACKING ROHS</p>
<p>DWG. 製圖</p>	<p>Betty</p>	<p>SCALE 比例 參考</p>	<p>PART NO. 料號 C3700-20YNSM30RB0R</p>
<p>DATE 制表日</p>	<p>2019/12/17</p>	<p>UNIT 單位 M M</p>	<p>REV. 版次 A</p>
		<p>PAGE 張數 1 OF 1</p>	

1 2 3 4 5 6 7 8