




- NOTE:
1. Insulator Material : LCP
 2. Terminal Material : Brass
 3. Plating : Tin
 4. Operating temperature range: -25°C ~ +85°C
 5. Rated voltage: 250V, AC, DC
 6. Contact resistance : $\leq 0.04\Omega$
 7. Insulation resistance : $\geq 800m\Omega$
 8. Withstand voltage: 200V, AC/minute

P數	A	B
2P	2	4
3P	4	6
4P	6	8
5P	8	10
6P	10	12
7P	12	14
8P	14	16
9P	16	18
10P	18	20
11P	20	22
12P	22	24

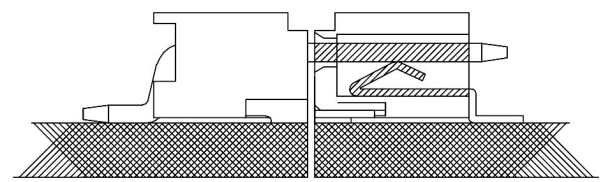

DIM	TOL	DIM	TOL
X.	± 0.30	X.	/
X.X	± 0.25	X.X	$\pm 2^\circ$
X.XX	± 0.20	X.XX	$\pm 1^\circ$
X.XXX	± 0.05	X.XXX	

APPD. 核准 Betty	RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	DWG. 製圖 Betty	SCALE 比例 參考	PART NAME 品名 2.0mm LED CONNECTOR XXPIN MALE SMT 90° TYPE MATERIAL: BRASS TIN PLATING REEL PACKING BEIGE COLOR (MATERIAL: LCP) ROHS
DATE 制表日 2019/08/28	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 C3804-XXMBNTRCR
	PAGE 張數 1 OF 1	REV. 版次 A	