





	1	2	3	4
A				
B	30	29.00	31.20	35.00
	29	28.00	30.20	34.00
	28	27.00	29.20	33.00
	27	26.00	28.20	32.00
	26	25.00	27.20	31.00
C	25	24.00	26.20	30.00
	24	23.00	25.20	29.00
	23	22.00	24.20	28.00
D	22	21.00	23.20	27.00
	21	20.00	22.20	26.00
	20	19.00	21.20	25.00
	19	18.00	20.20	24.00
E	18	17.00	19.20	23.00
	17	16.00	18.20	22.00
	16	15.00	17.20	21.00
	15	14.00	16.20	20.00
F	14	13.00	15.20	19.00
	13	12.00	14.20	18.00
	12	11.00	13.20	17.00
	11	10.00	12.20	16.00
G	10	9.00	11.20	15.00
	09	8.00	10.20	14.00
	08	7.00	9.20	13.00
	07	6.00	8.20	12.00
	06	5.00	7.20	11.00
	05	4.00	6.20	10.00
	04	3.00	5.20	9.00
H	03	2.00	4.20	8.00
	CKT	DIM A	DIM B	DIM C

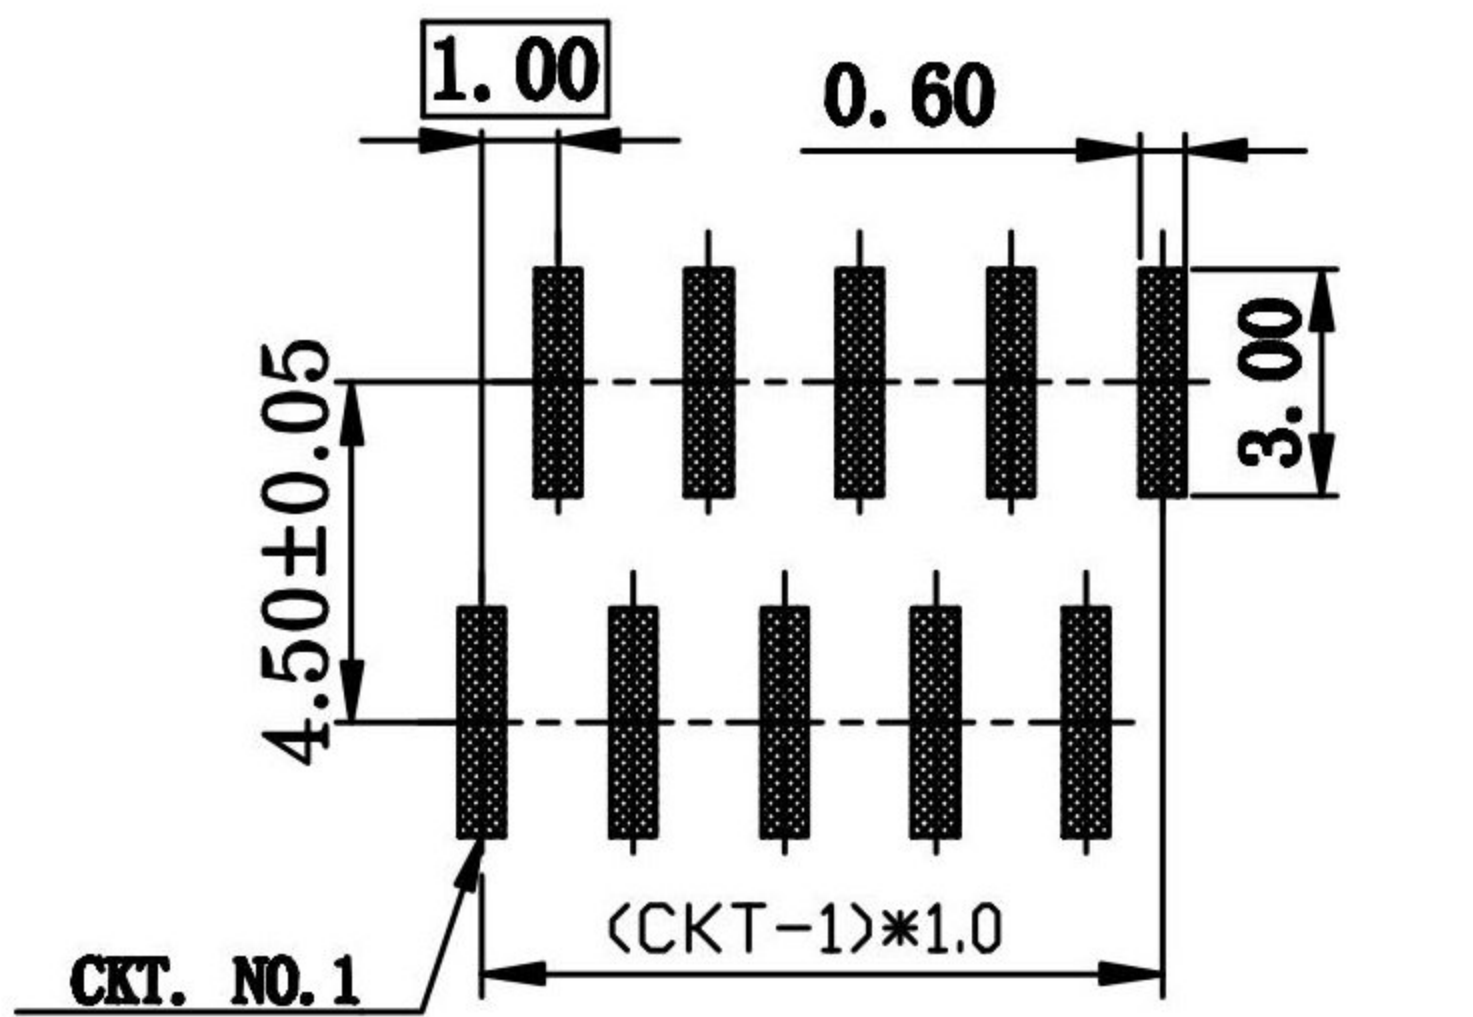

PN:C3916-XXVTXI00R

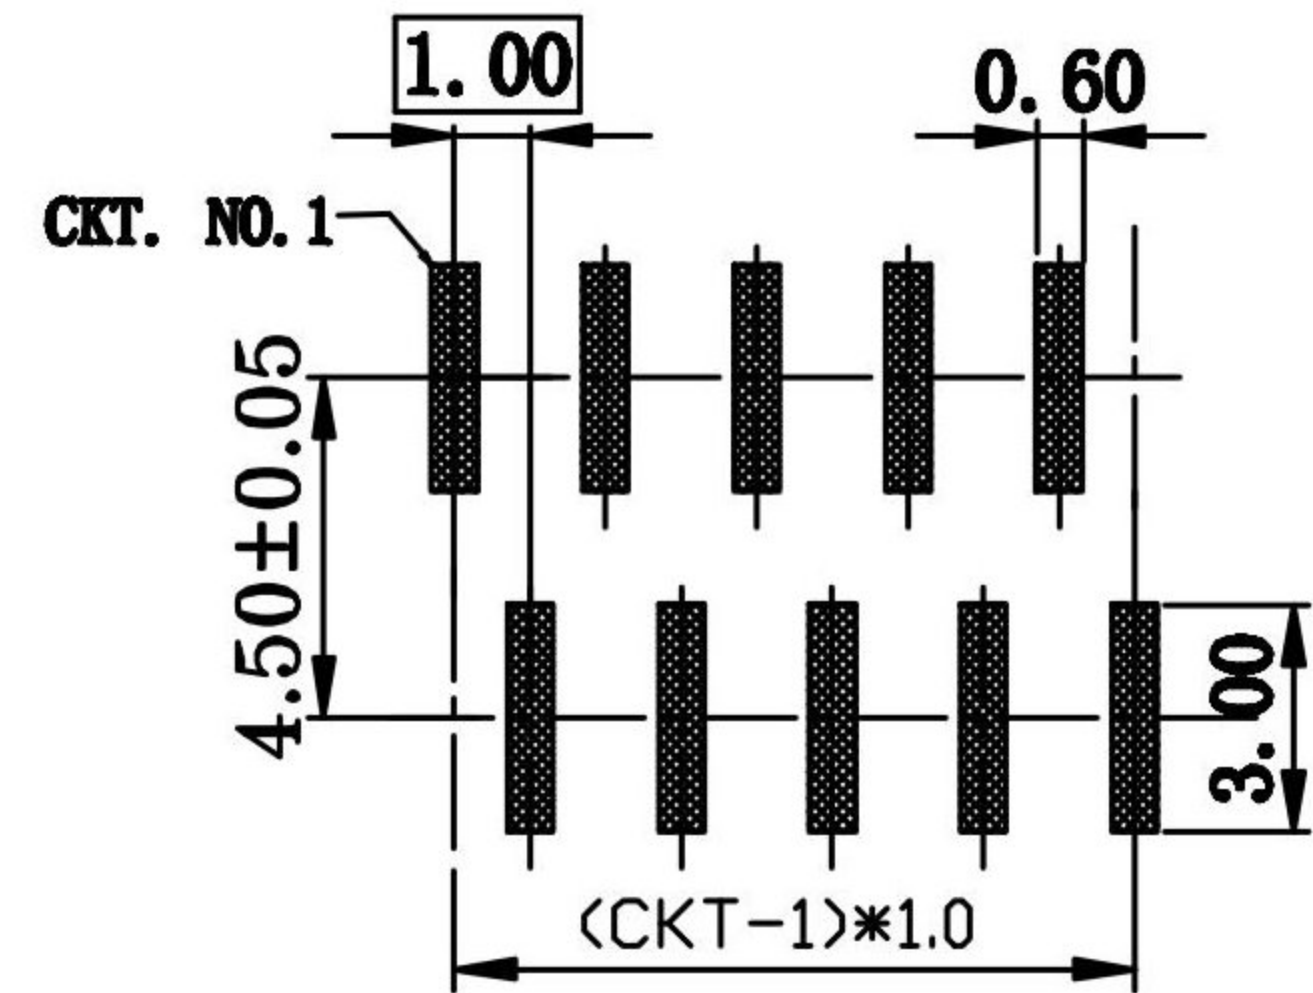

PN:C3916-XXCTXI00R

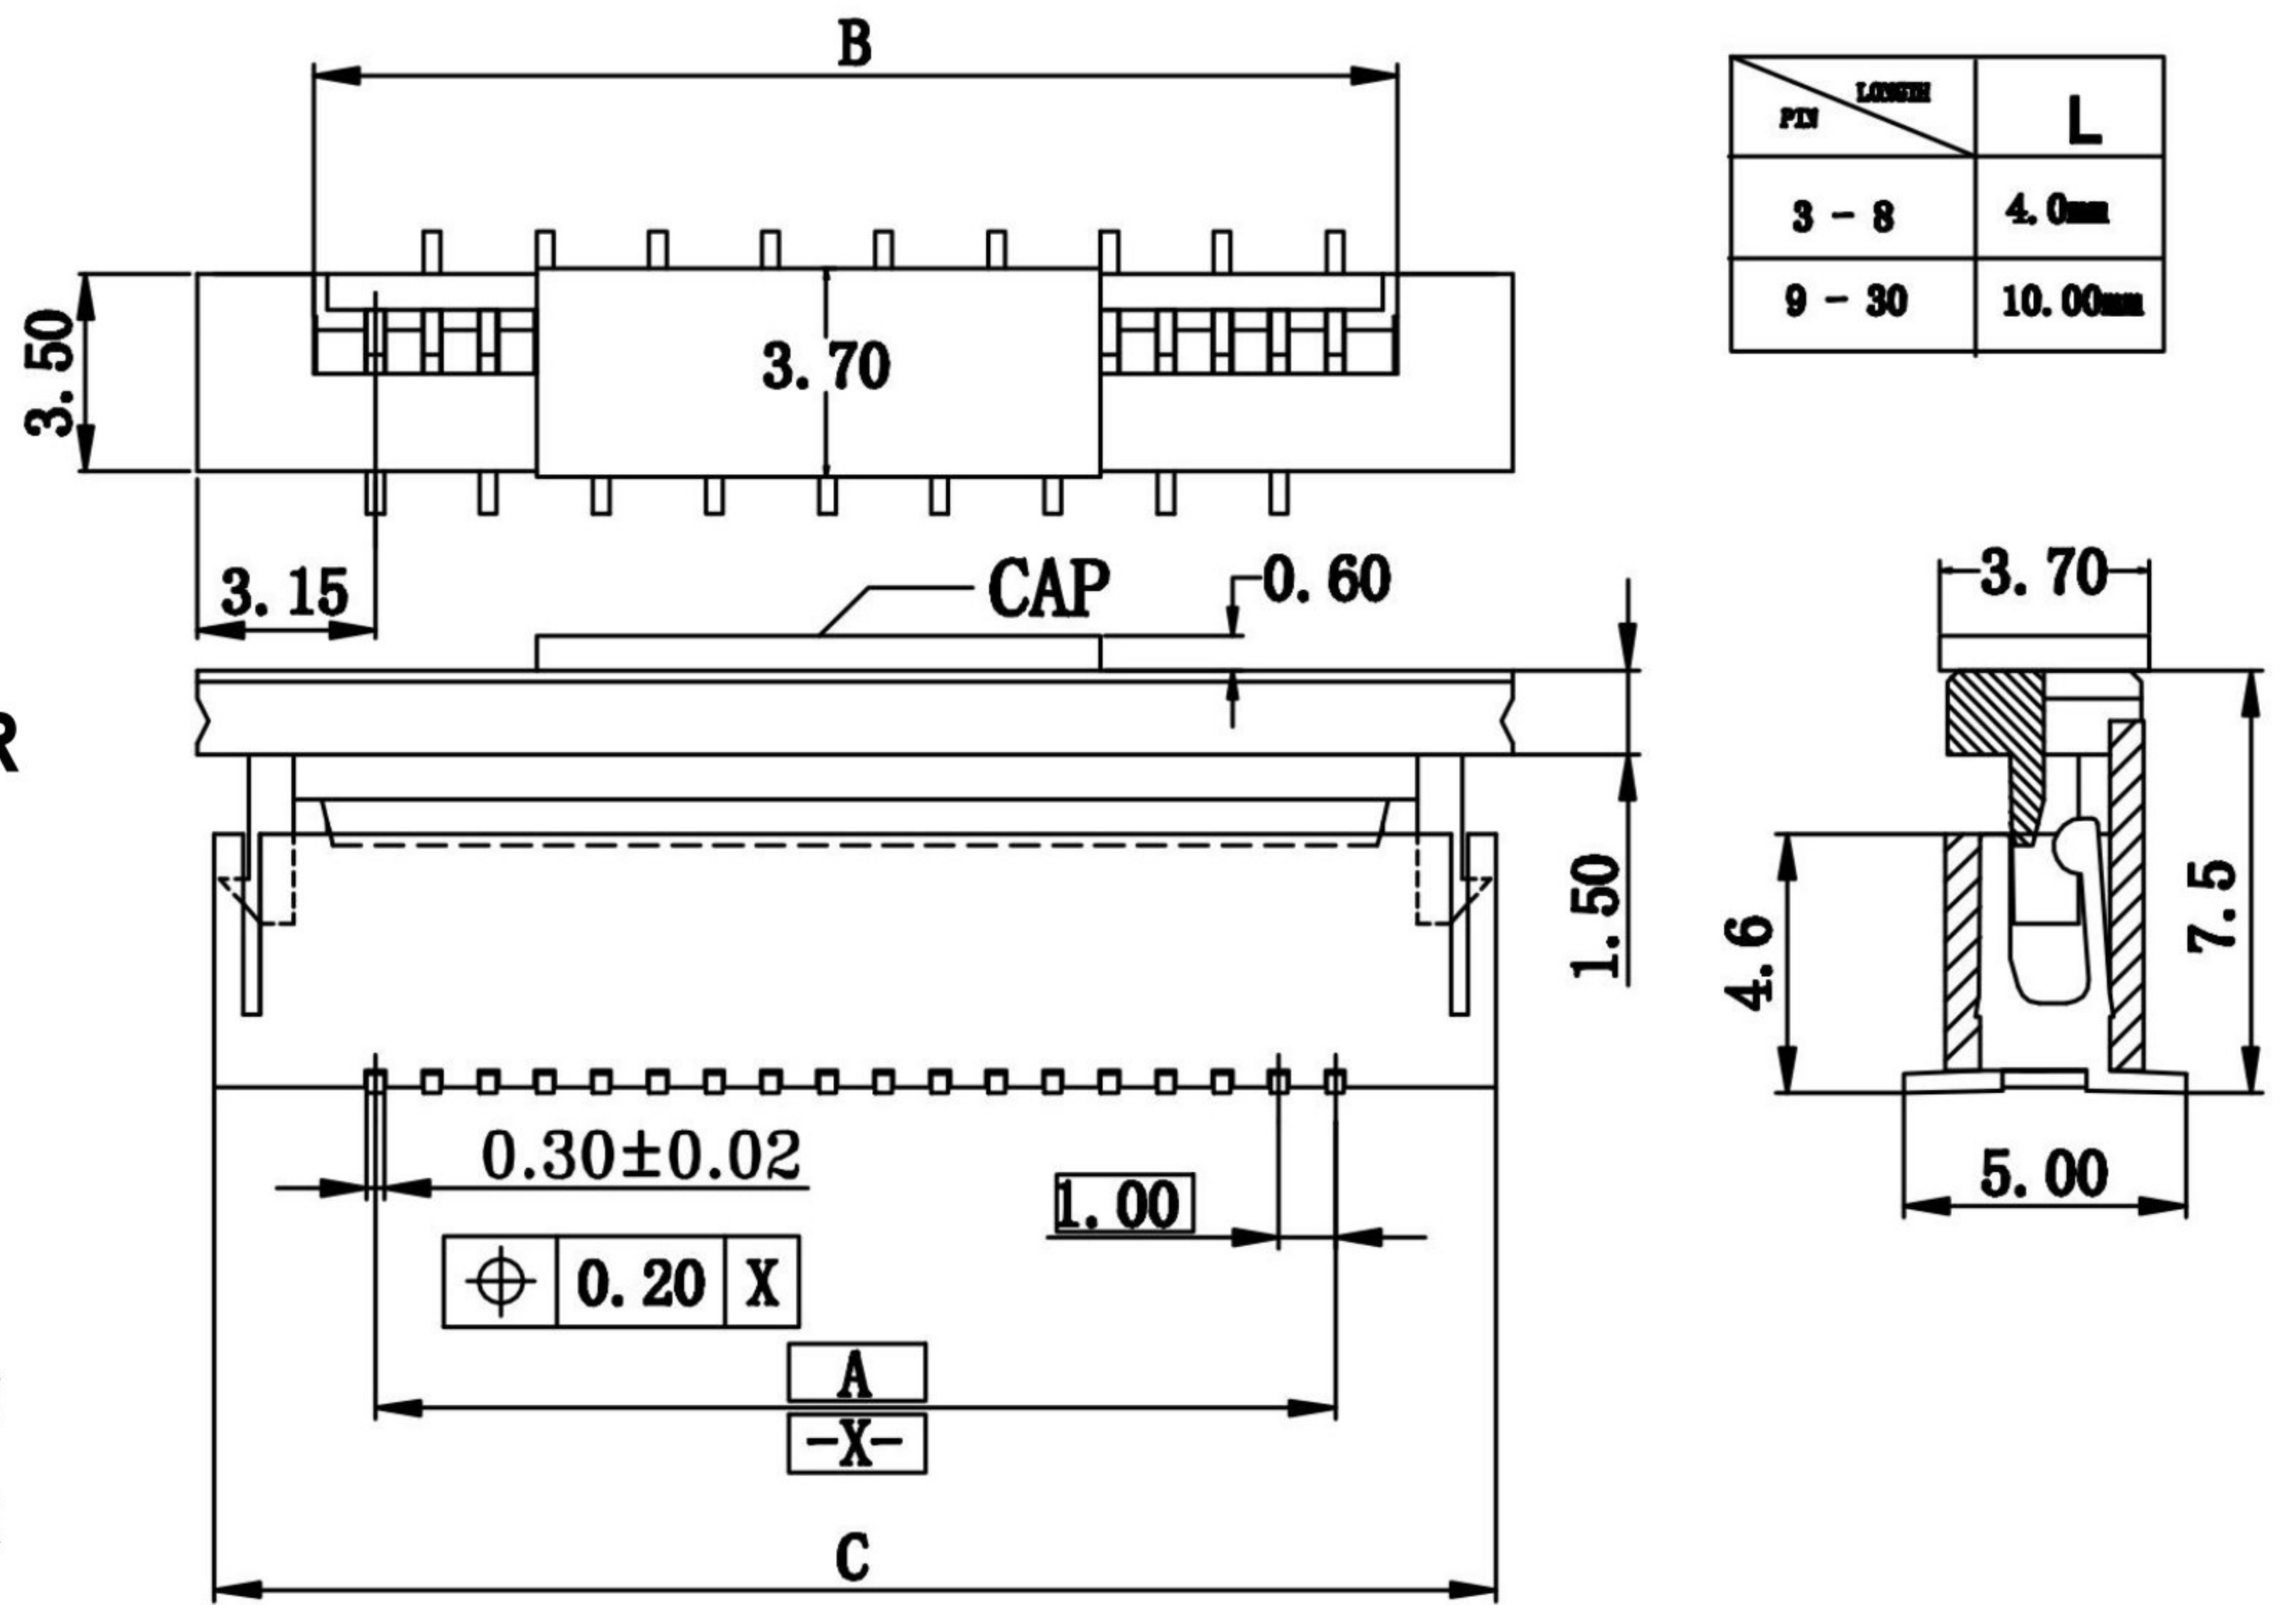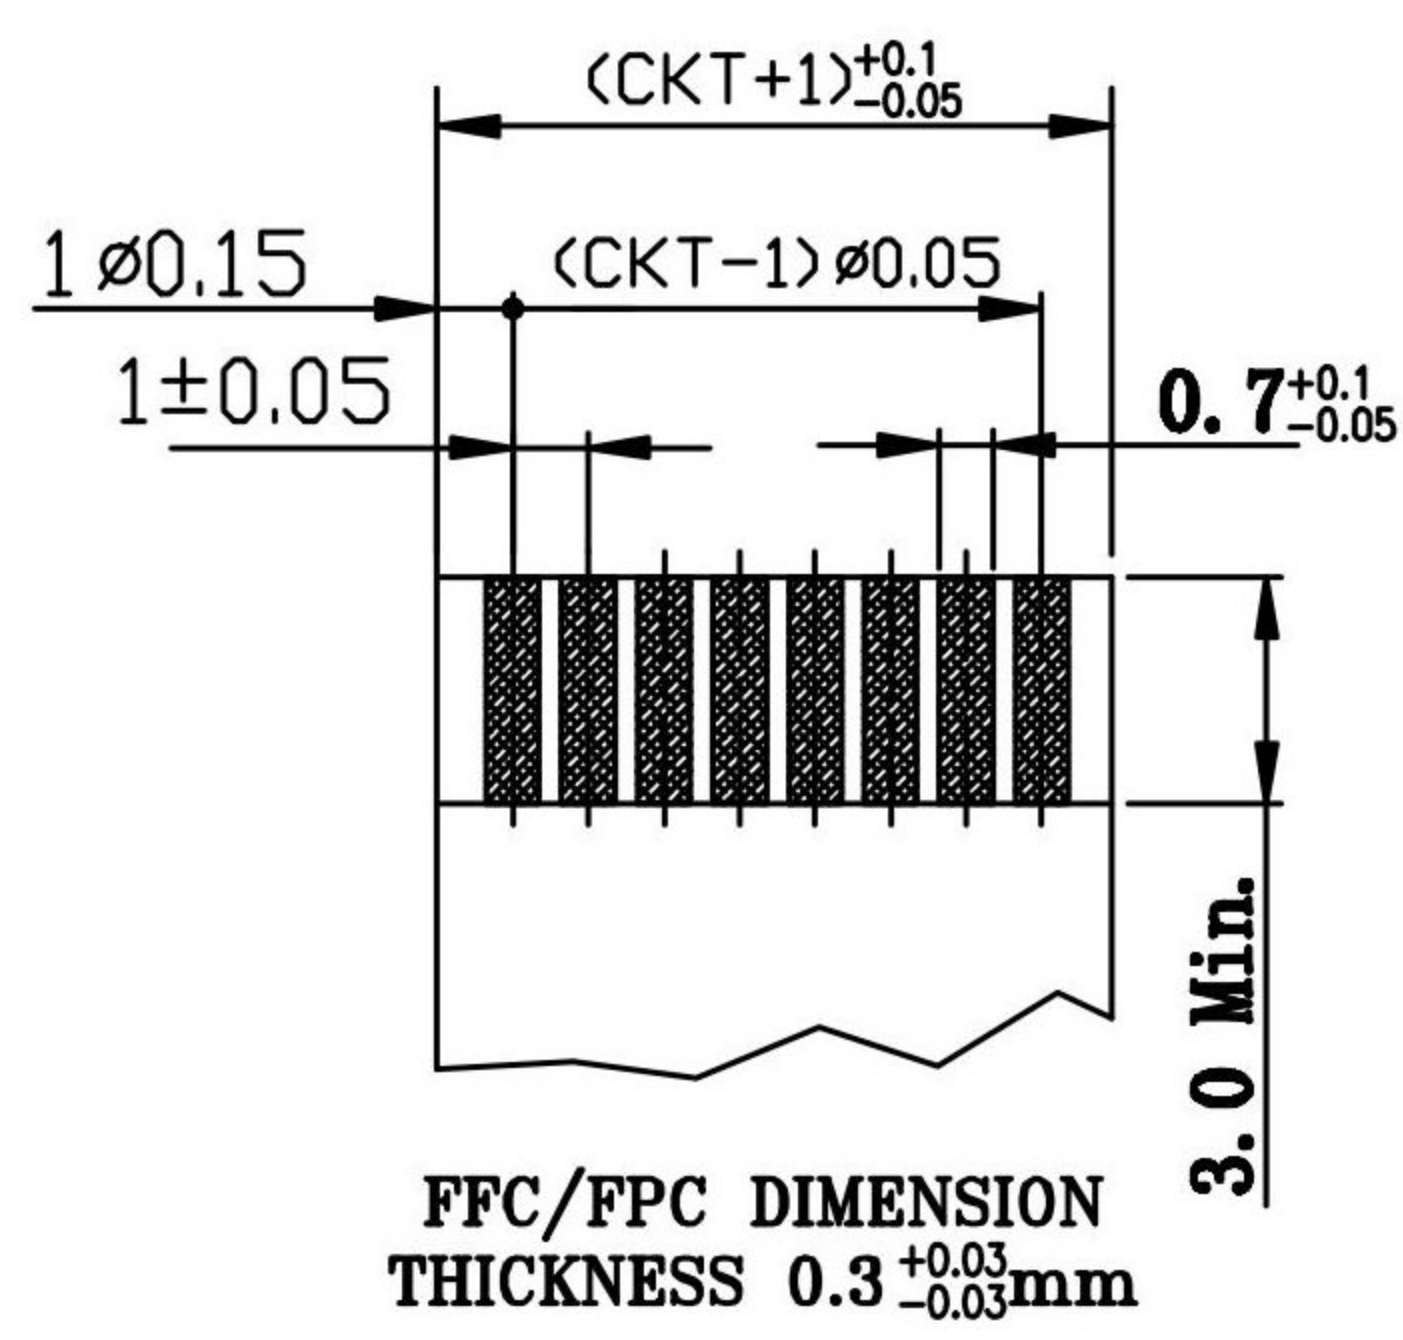

- NOTES:
- 1.Material: INSULATOR: LCP
TERMINAL:PHOSPHOR BRONZE
 - 2.FLASH:0.08mm MAX.
 - 3.CAMBER:0.05mm/cm MAX.
 - 4.WARP:0.05mm/cm
 - 5.DEFORMATION:NA. ,TWIST:NA.

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 HELEN</p>	<p>SCALE 比例 參考</p>	<p>TOLERANCE 容許公差 0.0 ±0.20 0.00 ±0.12 0.000 ±0.05 Angle: ±3°</p>	<p>PART NAME 品名 FPC/FFC ZIF 1.0mm SMT TYPE XXP CROSS PIN TIN PLATING IVORY INSULATOR ROHS</p>
<p>DWG. 製圖 ABBY</p>	<p>UNIT 單位 MM</p>	<p>SIZE. 紙張尺寸 A4</p>	<p>PART NO. 料號 C3916-XX(C,V)TXI00R</p>
<p>DATE 制表日 2014/10/27</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 B</p>	