







NOTES:

1. MATERIALS: HOUSING-LCP UL94V-0 , COVER -LCP UL94V-0
 TERMINAL-PHOSPHOR BRONZE, LATCH -PHOSPHOR BRONZE.
 2. CAMBER: 0.05mm/cm MAX, DEFORMATION: NA,
 WARP: 0.05mm/cm MAX, TWIST: NA.

SECIFICATION:

1. CURRENT RATING :0.5A MAX
 2. VOLTAGE RATING :50V AC MAX
 3. OPERATION TEMP: -40°C~+105°C
 4. INSULATION RESISTANCE:500MΩ
 5. DIELECTRIC WITHSTANDING VOLTAGE:500V DC,1min
 6. CONTACT RESISTANCE:40mΩ Max

32	31.00	33.20	37.60	38.10
31	30.00	32.20	36.60	37.10
30	29.00	31.20	35.60	36.10
29	28.00	30.20	34.60	35.10
28	27.00	29.20	33.60	34.10
27	26.00	28.20	32.60	33.10
26	25.00	27.20	31.50	32.10
25	24.00	26.20	30.60	31.10
24	23.00	25.20	29.60	30.10
23	22.00	24.20	28.50	29.10
22	21.00	23.20	27.60	28.10
21	20.00	22.20	26.60	27.10
20	19.00	21.20	25.60	26.10
19	18.00	20.20	24.50	25.10
18	17.00	19.20	23.60	24.10
17	16.00	18.20	22.50	23.10
16	15.00	17.20	21.60	22.10
15	14.00	16.20	20.50	21.10
14	13.00	15.20	19.60	20.10
13	12.00	14.20	18.60	19.10
12	11.00	13.20	17.60	18.10
11	10.00	12.20	16.50	17.10
10	9.00	11.20	15.60	16.10
09	8.00	10.20	14.50	15.10
08	7.00	9.20	13.60	14.10
07	6.00	8.20	12.50	13.10
06	5.00	7.20	11.60	12.10
05	4.00	6.20	10.50	11.10
04	3.00	5.20	9.50	10.10
03	2.00	4.20	8.50	9.10
CKT	DIM. A	DIM. B	DIM. C	DIM. D

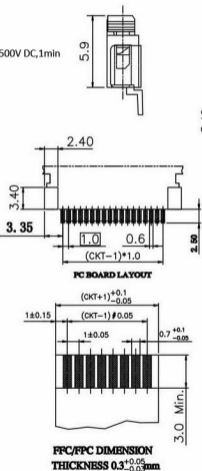

C3916-XXUTX100R

C3916-XXBTX100R

RoHS
Compliant

HSM 玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

APPD 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 圖號	UNIT 單位	SIZE 規格尺寸	0 ± 0.30 00 ± 0.20 ANG. ± 3°
DATE 製成日	REV. 版次	PAGE 張數	1 OF 1
2015/03/05	Betty	M M	A 4

PART NAME 品名	
FPC/FPC ZIF 1.0mm SMT TYPE	
HORIZONTAL TYPE XXP	
TIN PLATING IVORY COLOR ROHS	
PART NO.	C3916-XX(U,B)TX100R
料號	