
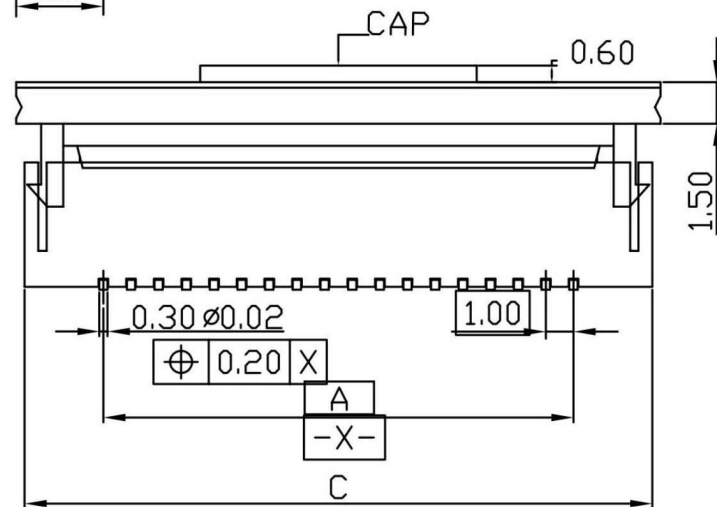
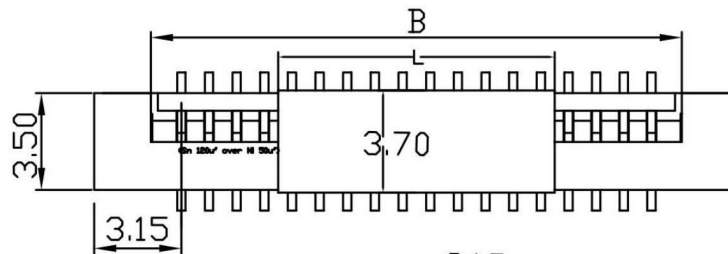
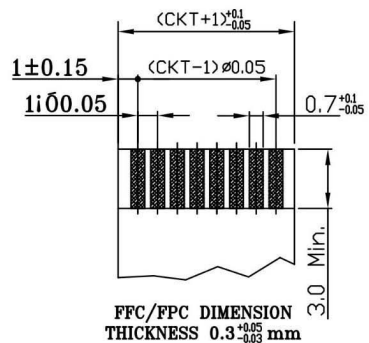



NOTES:

- 1.MATERIAL:INSULATOR: L.C.P. ; COVER: L.C.P.
TERMINAL: PHOSPHOR BRONZE
- 2.FLASH:0.08mm MAX.
- 3.CAMBER:0.05mm/cm MAX.
- 4.WARP:0.05mm/cm
- 5.DEFORMATION:NA. ,TWIST:NA.

30	29.00	31.20	35.00
29	28.00	30.20	34.00
28	27.00	29.20	33.00
27	26.00	28.20	32.00
26	25.00	27.20	31.00
25	24.00	26.20	30.00
24	23.00	25.20	29.00
23	22.00	24.20	28.00
22	21.00	23.20	27.00
21	20.00	22.20	26.00
20	19.00	21.20	25.00
19	18.00	20.20	24.00
18	17.00	19.20	23.00
17	16.00	18.20	22.00
16	15.00	17.20	21.00
15	14.00	16.20	20.00
14	13.00	15.20	19.00
13	12.00	14.20	18.00
12	11.00	13.20	17.00
11	10.00	12.20	16.00
10	9.00	11.20	15.00
09	8.00	10.20	14.00
08	7.00	9.20	13.00
07	6.00	8.20	12.00
06	5.00	7.20	11.00
05	4.00	6.20	10.00
04	3.00	5.20	9.00
03	2.00	4.20	8.00
CKT	DIM A	DIM B	DIM C

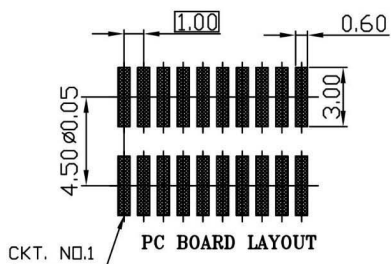

PIN	LENGTH	L
3 - 8		4.0mm
9 - 30		10.00mm

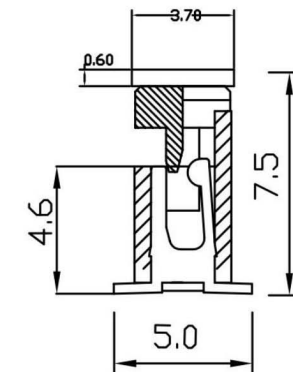

SECIFICATION:
 CURRENT RATING :0.5A MAX
 VOLTAGE RATING :50V AC MAX
 OPERATION TEMP: -40°C~+105°C
 INSULATION RESISTANCE:500MΩ
 DIELECTRIC WITHSTANDING VOLTAGE:500V DC,1min
 CONTACT RESISTAMCE:40mΩ Max

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0.0 ±0.20 0.00 ±0.12 0.00 ±0.05 Angle ±2°	PART NAME 品名 FPC/FFC ZIF 1.0mm SMT TYPE VERTICAL TYPE XXP PARALLEL PIN TIN PLATING IVORY COLOR ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C3916-XXPTX100R
DATE 制表日 2014/10/02	PAGE 張數 1 OF 1	REV. 版次 B	