

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2016/5/3	SCALE 比例 UNIT 單位 PAGE 張數 Helen M M 3 OF 1	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3° SIZE 紙張尺寸 A 4 REV. 版本 D	PART NAME 品名 FPC/FFC ZIF 0.5mm SMT TYPE XXP TIN PLATING IVORY COLOR ROHS PART NO. 料號 C3917-XXV(C)TXI00R


3.DIMENSION:

CKT	A	B	C	D	E
4	8.60	1.50	6.60		
5	9.10	2.00	7.10		
6	9.60	2.50	7.60		
7	10.10	3.00	8.10		
8	10.80	3.50	8.60		
9	11.10	4.00	9.10		
10	11.80	4.50	9.60		
11	12.10	5.00	10.10		
12	12.60	5.50	10.60		
13	13.10	6.00	11.10		
14	13.80	6.50	11.60		
15	14.10	7.00	12.10		
16	14.60	7.50	12.60	0.80	5.00
17	15.10	8.00	13.10		
18	15.60	8.50	13.60		
19	16.10	9.00	14.10		
20	16.60	9.50	14.60		
21	17.10	10.00	15.10		
22	17.80	10.50	15.60		
23	18.10	11.00	16.10		
24	18.80	11.50	16.60		
25	19.10	12.00	17.10		
26	19.60	12.50	17.60		
27	20.10	13.00	18.10		
28	20.80	13.50	18.60		
29	21.10	14.00	19.10		
30	21.80	14.50	19.60		


CKT	A	B	C	D	E
31	22.10	15.00	20.10		
32	22.60	15.50	20.60		
33	23.10	16.00	21.10		
34	23.60	16.50	21.60		
35	24.10	17.00	22.10		
36	24.60	17.50	22.60		
37	25.10	18.00	23.10		
38	25.60	18.50	23.60		
39	26.10	19.00	24.10		
40	26.60	19.50	24.60		
41	27.10	20.00	25.10		
42	27.60	20.50	25.60		
43	28.10	21.00	26.10		
44	28.60	21.50	26.60		
45	29.10	22.00	27.10		
46	29.60	22.50	27.60		
47	30.10	23.00	28.10		
48	30.60	23.50	28.60	1.20	5.40
49	31.10	24.00	29.10		
50	31.60	24.50	29.60		
51	32.10	25.00	30.10		
52	32.60	25.50	30.60		
53	33.10	26.00	31.10		
54	33.60	26.50	31.60		
55	34.10	27.00	32.10		
56	34.60	27.50	32.60		
57	35.10	28.00	33.10		
58	35.60	28.50	33.60		
59	36.10	29.00	34.10		
60	36.60	29.50	34.60		

Remard" * "Without mould. First order must charge mould cost.

(↓ C3917-XXVTXI00R)

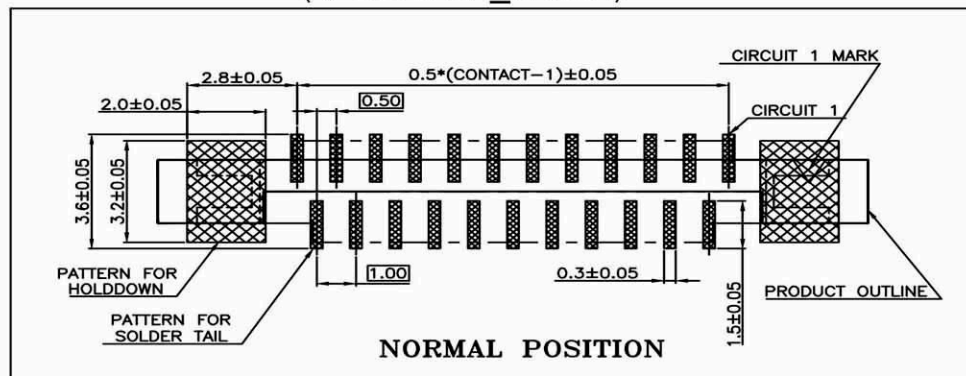

(↓ C3917-XXCTXI00R)

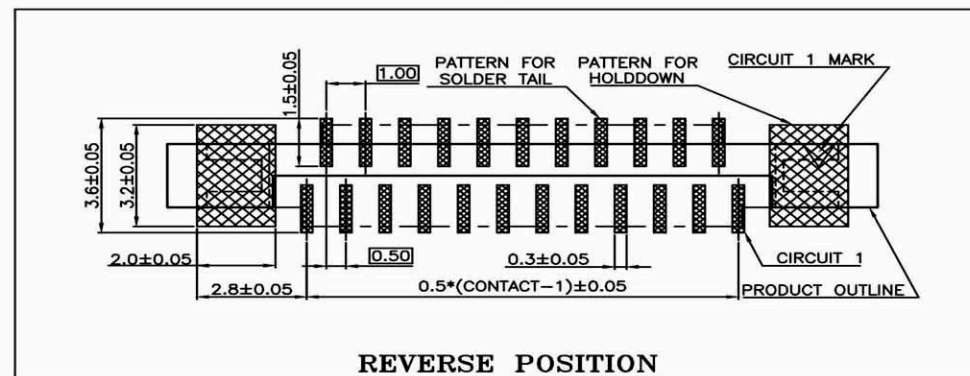


RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)

NOTE

- 1.MATERIALS:HOUSING:HEAT RESISTANCE PLASTIC UL94V-0
- COVER:HEAT RESISTANCE PLASTIC UL94V-0
- CONTACT:COPPER ALLOY
- LATCH:COPPER ALLOY

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE 容許公差</p> <p>0 ± 0.35</p> <p>0.00 ± 0.25</p> <p>ANG. ± 3°</p>	<p>PART NAME 品名</p> <p>FPC/FFC ZIF 0.5mm SMT TYPE XXP TIN PLATING</p> <p>IVORY COLOR ROHS</p>
<p>DWG. 製圖</p> <p>Helen</p>	<p>SCALE 比例</p> <p>參 考</p>	<p>UNIT 單位</p> <p>MM</p>	<p>PART NO.</p> <p>料 號 C3917-XXV(C)TXI00R</p>
<p>DATE 制表日</p> <p>2016/5/3</p>	<p>PAGE 張數</p> <p>3 OF 2</p>	<p>REV. 版本</p> <p>D</p>	

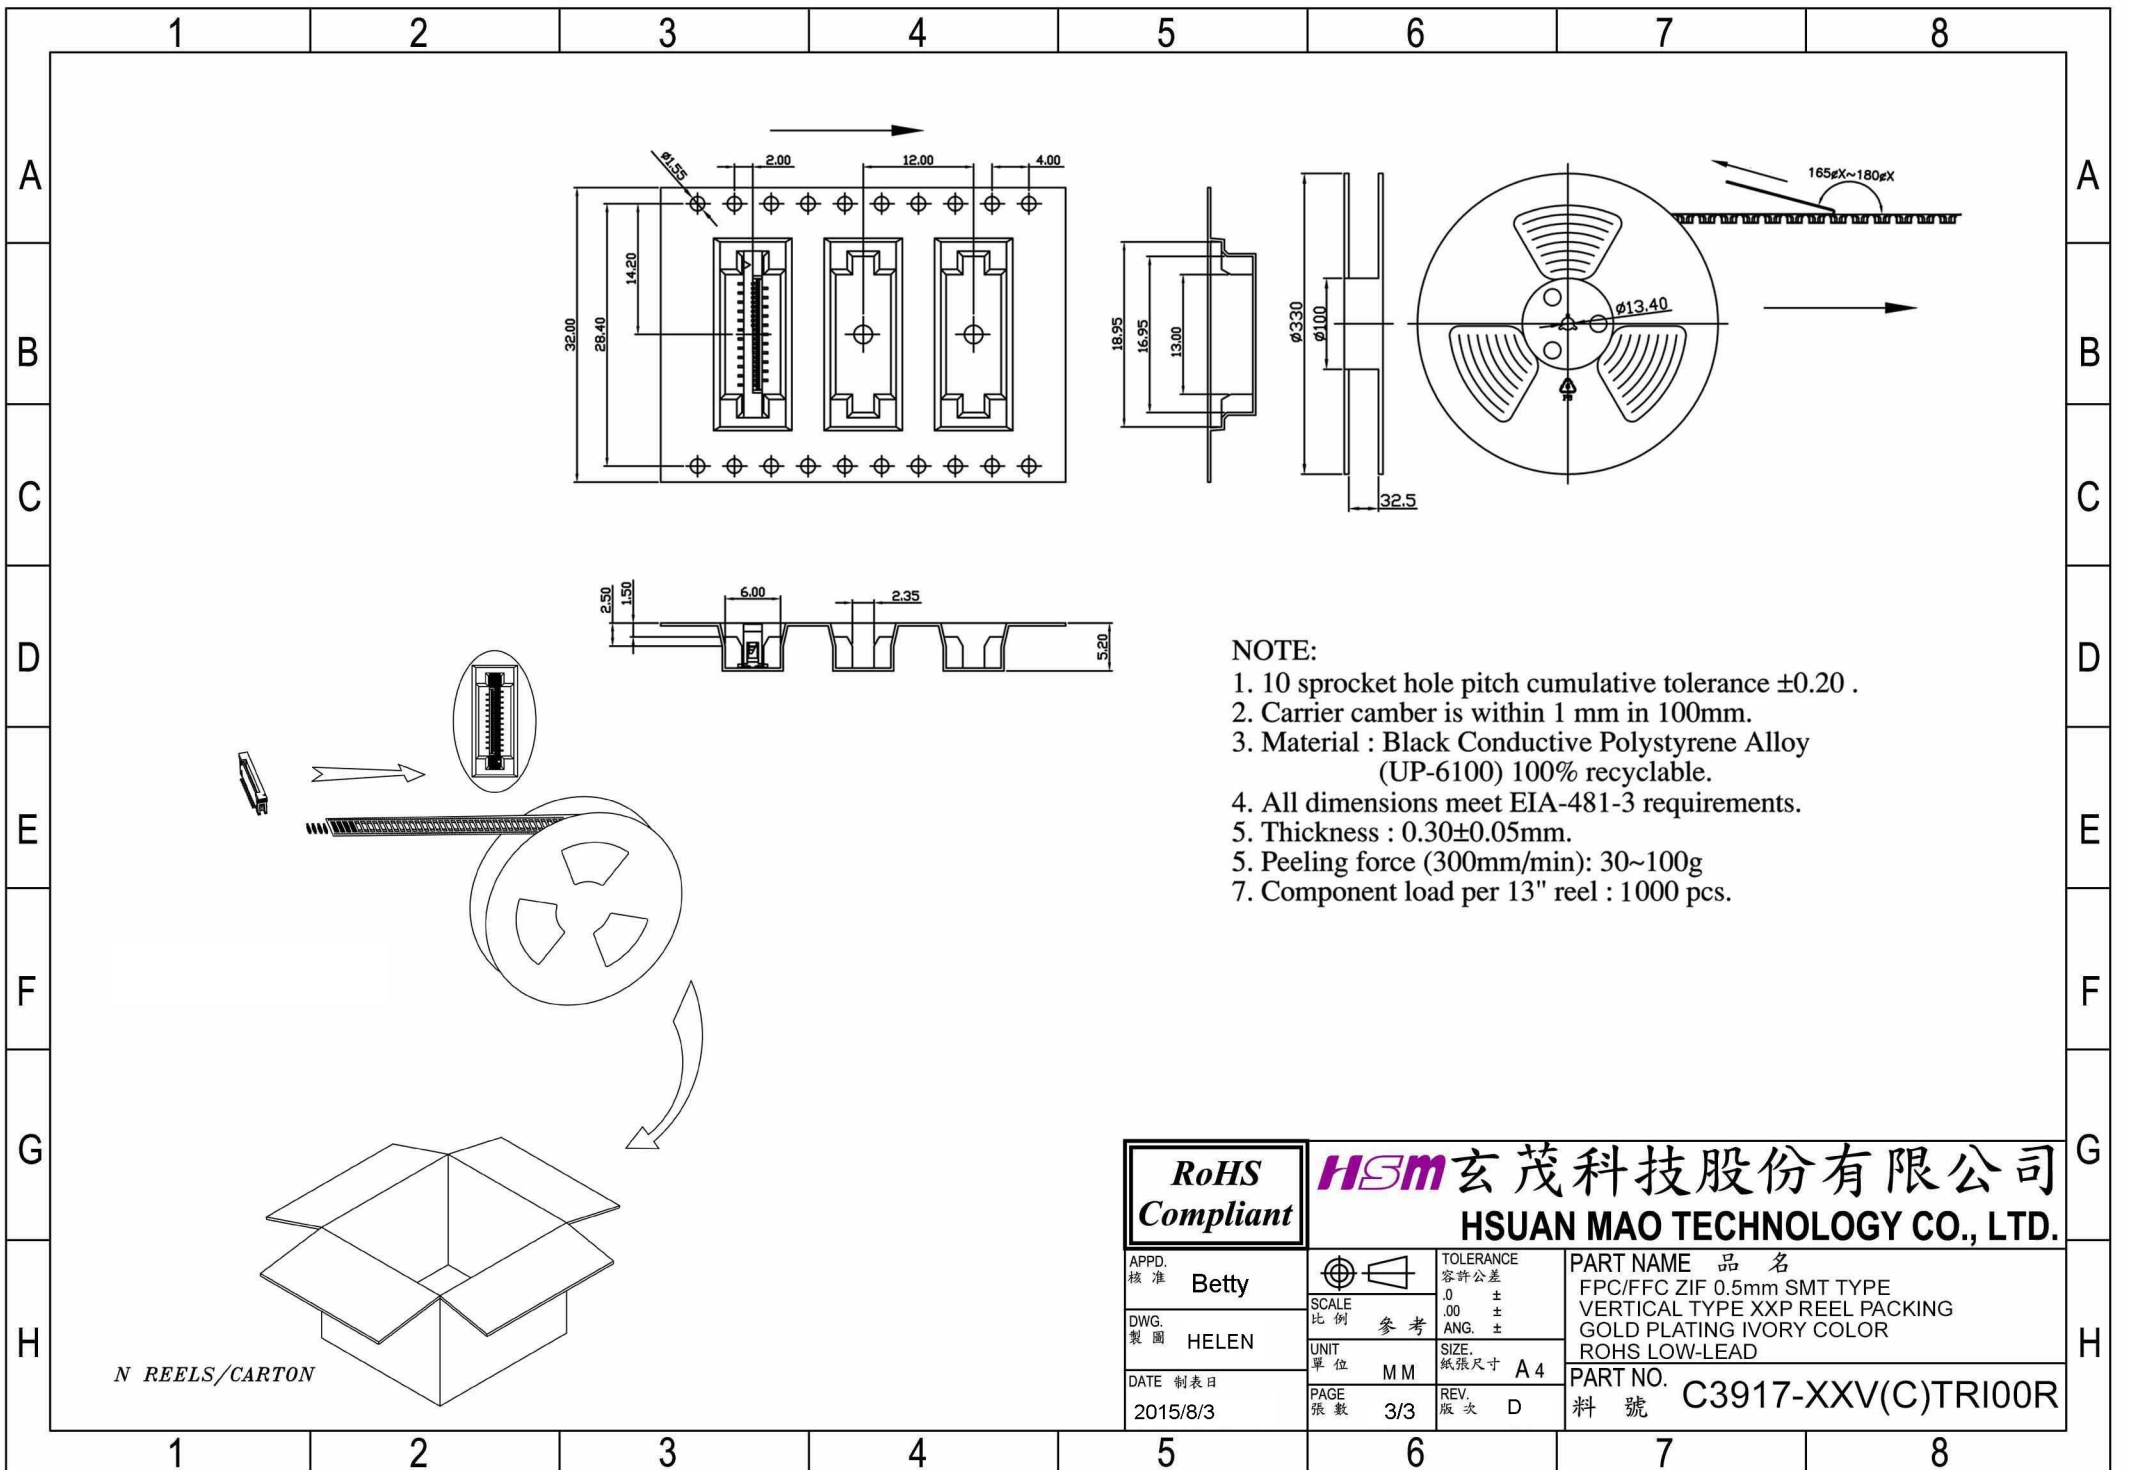

- NOTE:
- 10 sprocket hole pitch cumulative tolerance ± 0.20 .
 - Carrier camber is within 1 mm in 100mm.
 - Material : Black Conductive Polystyrene Alloy (UP-6100) 100% recyclable.
 - All dimensions meet EIA-481-3 requirements.
 - Thickness : 0.30 ± 0.05 mm.
 - Peeling force (300mm/min): 30~100g
 - Component load per 13" reel : 1000 pcs.

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	Betty	 TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 FPC/FFC ZIF 0.5mm SMT TYPE VERTICAL TYPE XXP REEL PACKING GOLD PLATING IVORY COLOR ROHS LOW-LEAD
DWG. 製圖	HELEN		
DATE 制表日	2015/8/3	 SIZE. 紙張尺寸 A4 REV. 版次 D	PART NO. 料號 C3917-XXV(C)TRI00R

N REELS/CARTON