


Material:

Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.
 Lock: Phosphor Bronze.


Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+105°C .


***RoHS Compliant**

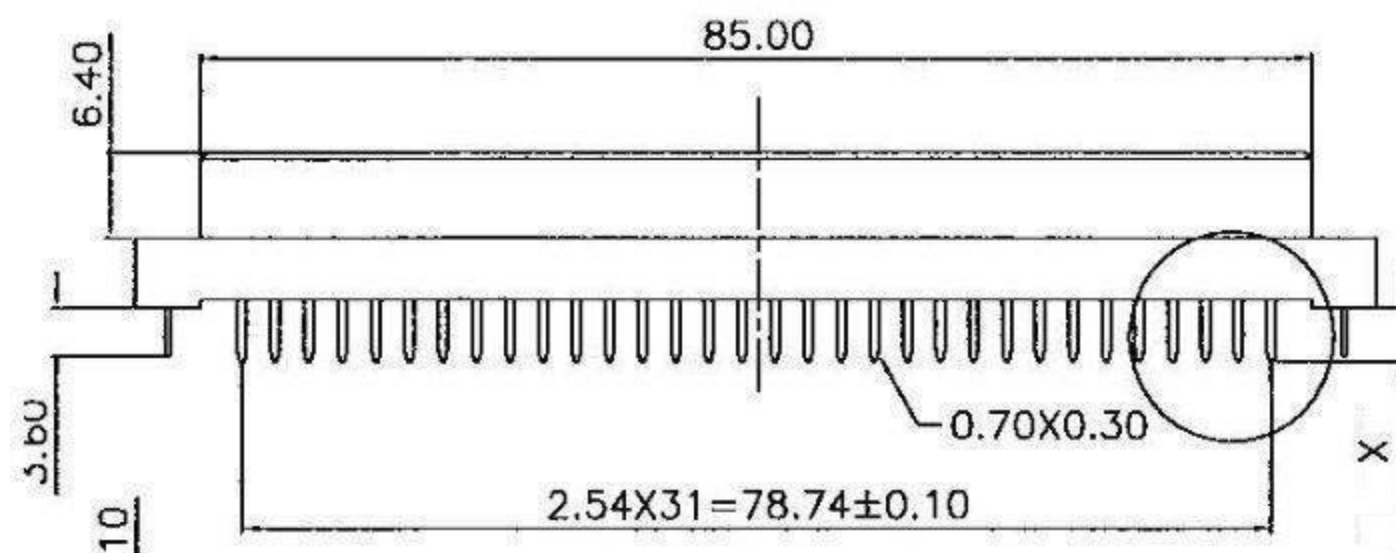

length	S	A	B	C
X	4.0	2.5	13	17

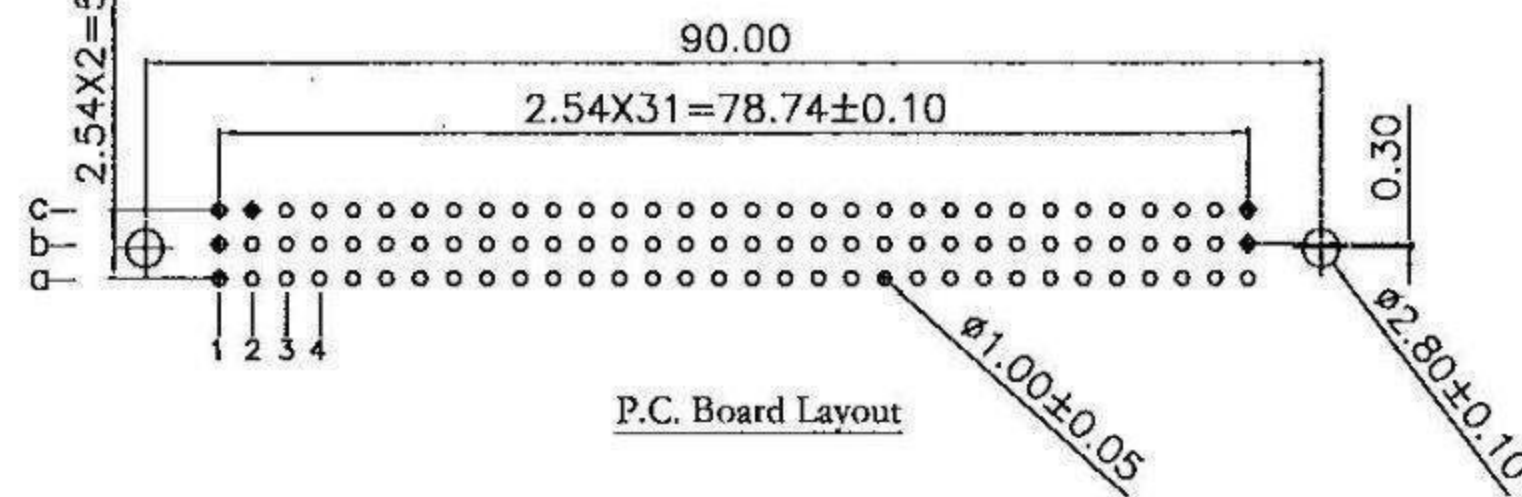

2.54mm	96	a b c	
	64	a - c	
	32	a - -	
5.08mm	48	a b c	
	32	a - c	
	16	a - -	
Pitch	Position	Rows With Contacts	Contact Arrange

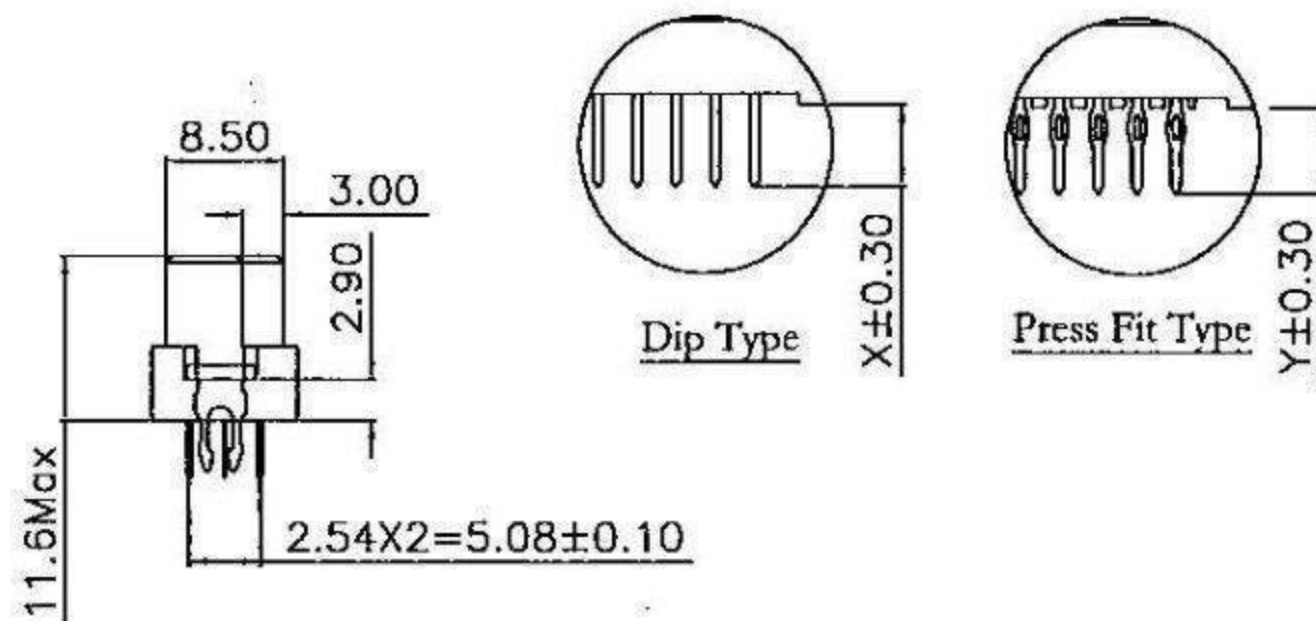

RoHS
Compliant

HSM 玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 BETTY
 DWG. 製圖 KAREN
 DATE 制表日 2011/09/19

SCALE 比例 參考
 UNIT 單位 MM
 PAGE 張數 1 OF 1

TOLERANCE 容許公差
 x = ±0.5
 .x = ±0.25
 .xx = ±0.15
 SIZE 紙張尺寸 A4
 REV. 版本 B
 PART NAME 品名
 DIN41612 DIP TYPE 180° XXP
 FEMALE ROHS LOW-LEAD
 PART NO. 料號 C4163-XXFXAXXR