
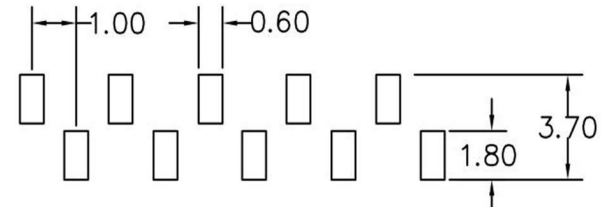



MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -40°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

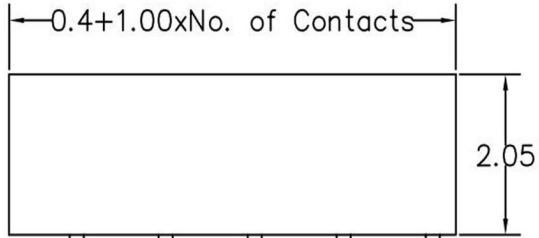

P.C.B. LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差 .0=±0.38 .00=±0.25 ANG=±5°	PART NAME 品名 1.0mm FEMALE HEADER SINGLE ROW H:2.05mm 1XXXP SMT B1 TYPE GOLD FLASH PLATING WITHOUT LOCATING PEG BOX PACKING ROHS
DWG. 製圖 Betty			
DATE 制表日 2012/09/21	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C5802-XXABGHN0R