

MATERIAL
 HOUSING : NYLON 6T,UL94V-0
 CONTACT : PHOSPHOR BRONZE
 PLATED : GOLD-FLASH
 COLOR : BLACK



SPECIFICATION
 CURRENT : 1A
 OPERATING TEMPERAURE : -40°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 5000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

$0.4 + (1.00 \times \text{No. of Positions}) \pm 0.30$

2.05 ± 0.15

1.00 0.15×0.3

$1.00 \times (\text{No. of Contacts} - 1) \pm 0.25$

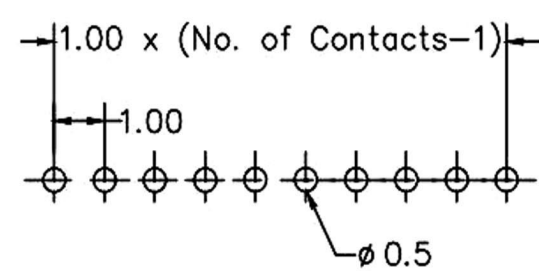

P.C.B LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE .0=±0.38 .00=±0.25 ANG=±5°	PART NAME 品名 1.0mm Female Header Single Row H=2.05mm 1XXXP Straight Type Gold Flash Plating Dip Length=2.0mm Nylon 6T UL94V-0 ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C5802-XXASGHN0R
DATE 制表日 2015/11/16	PAGE 張數 1 OF 1	UNIT 單位 MM	REV. 版次 A