


Specifications


Current Rating: 1Amp Δ
 Insulation Resistance: 1000M Ω Min Δ
 Dielectric Withstanding Voltage: 300VAC Δ
 Contact Resistance: 20m Ω Max. Δ
 Operating Temperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 sec.

Materials

Contact Material: Phosphor Bronze
 Δ Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

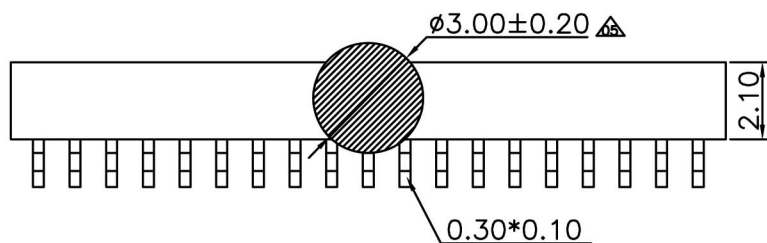

Recommended P.C.Board Layout
 (Tolerance: ±0.05)



RoHS Compliant		HSM 玄茂科技股份有限公司		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		GENERAL TOLERANCE		PART NAME 品名	
DWG. 製圖		X'±5.0'	X±0.30	1.0mm FEMALE HEADE SINGLE ROW HORIZONTAL SMT TYPE 1XXXP H:2.1mm GOLD FLASH PLATING LCP UL94V-0 BLACK INSULATOR ROHS	
DATE 制表日		.X'±3.0'	.X±0.25		
2015/10/21	.XX'±2.0'	.XX±0.15			
		.XXX'±1.0'	.XXX±0.10	PART NO.	
				料號 C5813-XXADGHX0R	