


NOTE

- A. Material:**
1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
 2. Contact : Copper Alloy.
 3. Plating : Gold Plating.
- B. Temperature:** -20 to +105°
- C. Electrical:**
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

Available Pins : 20~100 Contacts

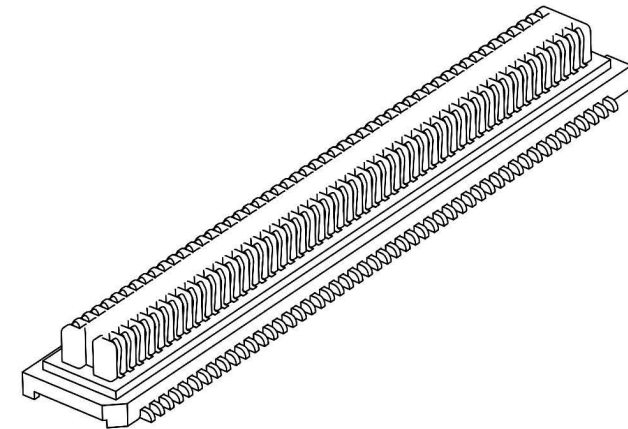

PCB Layout For Surface Mounting

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>		<p>TOLERANCE</p> <p>.X ±0.30 .XX ±0.20 .XXX ±0.10</p>	<p>PART NAME 品名</p> <p>0.5mm BOARD TO BOARD SMT CONN. 2XXXPIN MALE AFTER ASSEMBLY=4.0mm GOLD FLASH PLATING WITHOUT LOCATING PAG BLACK COLOR CAP+REEL PACKING (MALE & FEMALE ONE SET) ROHS</p>
<p>DWG. 製圖</p> <p>Betty</p>	<p>SCALE 比例</p> <p>參考</p>	<p>UNIT 單位</p> <p>MM</p>	<p>PART NO.</p> <p>C6005-XXMCGBQ1R</p>
<p>DATE 制表日</p> <p>2018/09/27</p>	<p>PAGE 張數</p> <p>1 OF 1</p>	<p>REV. 版次</p> <p>A</p>	<p>料號</p> <p>C6005-XXMCGBQ1R</p>